


Excel Solid Cat5e Cable U/UTP LSOH Euroclass B2ca 305m Box Violet

Item Code: 190-066

excel
without compromise.

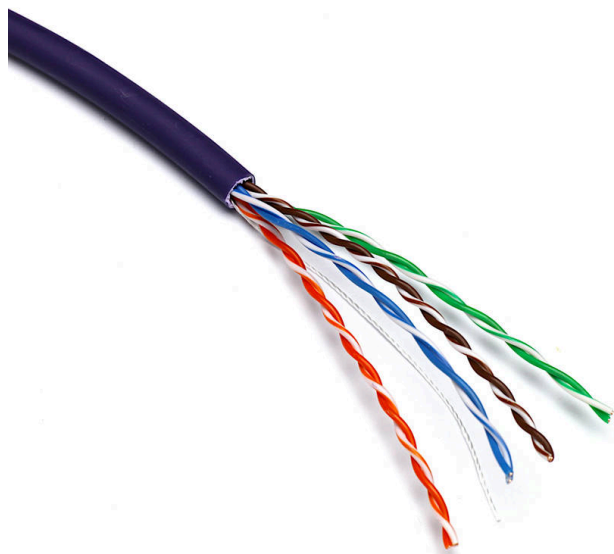

✕ Cat5e Solid Copper Cable

✕ U/UTP No Overall Screening

✕ No Conductor Screening

✕ Outer sheath colour Violet

✕ Reaction-to-fire class according to EN 13501-6: B2ca

✕ Smoke development class according to EN 13501-6: s1a

Product Overview

Excel solid Cat5e ethernet cable U/UTP LSOH CPR Euroclass B2ca are manufactured and tested to ISO 11801, EN 50173 and ANSI/TIA-568-C Cat 5e specifications, 305m boxes. Each cable consists of 8 colour coded solid copper conductors twisted together to form four pairs.

The whole cable is produced in a LSOH sheath which is metre marked and labelled with part code and DoP information.

Product Specifications

Feature	Values
Conductor surface	Bare
AWG size	24
Conductor category	Class 1 = solid
Total number of cores	8
Stranding element	Pairs
Specification core insulation	PE
Core identification	Colour
Overall screening	None
Conductor screening	None
Outer sheath material	Copolymer


Excel Solid Cat5e Cable U/UTP LSOH Euroclass B2ca 305m Box Violet

Item Code: 190-066



Outer sheath colour	Violet
Reaction-to-fire class according to EN 13501-6	B2ca
Smoke development class according to EN 13501-6	s1a
Euro class flaming droplets/particles according to EN 13501-6	d0
Euro class acidity according to EN 13501-6	a1
Halogen free (acc. EN 60754-1/2)	Yes
Flame retardant	In accordance with EN 60332-1-2 and EN 50399
Low smoke (acc. BS EN 61034-2)	Yes
Outer diameter approx.	5 mm
Operating Temperature Range	-20...60 °C
Category	5E
NVP value	65 %

Cross-section diagram

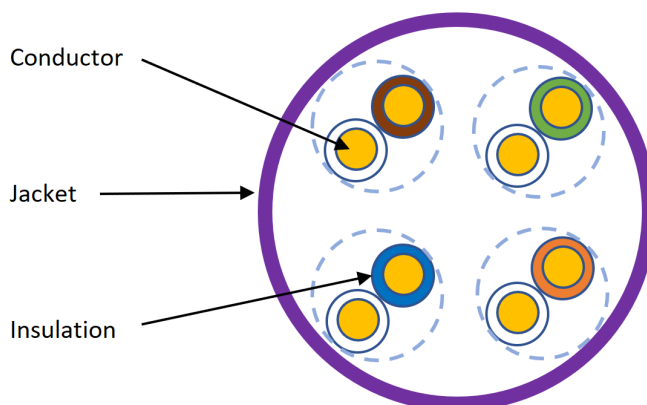

Excel Solid Cat5e Cable U/UTP LSOH Euroclass B2ca 305m Box Violet

Item Code: 190-066



Cable specifications

Features	Values
MBR during installation	8x cable OD
MBR installed	4x cable OD
Pair-to-Ground Capacitance Unbalance	$\leq 330\text{pF}/100\text{m}$
Resistance Unbalance	0.02
Mutual Capacitance	$\leq 5.6\text{nF}/100\text{m}$
Coupling Attenuation	$\geq 40\text{ dB}$ (Type III)
Max.Conductor DC Resistance @ 20 Deg.C	93.8 (Ohm/km)
Min.Insulation Resistance(Mohm.km)	5000
Dielectric strength	DC ,1KV/min

Standards

Applicable standard	Subject
ISO/IEC 11801-1:2017	Information technology - Generic cabling for customer premises: Part 1 General Requirements
IEC 61156-5:2020	Multicore and symmetrical pair/quad cables for digital communications - Part 5: Symmetrical pair/quad cables with transmission characteristics up to 1 000 MHz - Horizontal floor wiring - Sectional specification
EN 50173-1:2018	Information technology. Generic cabling systems - General requirements
EN 50173-2:2018	Information technology. Generic cabling systems - Office premises
BS EN 50288-3-1:2013	Multi-element metallic cables used in analogue and digital communication and control. Sectional specification for unscreened cables characterised up to 250 MHz
EN 50399:2011+A1:2016	Common test methods for cables under fire conditions. Heat release and smoke production measurement on cables during flame spread test. Test apparatus, procedures, results
IEC 60332-1-2:2004 + A12:2020	Tests on electric and optical fibre cables under fire conditions. Test for vertical flame propagation for a single insulated wire or cable. Procedure for 1 kW pre-mixed flame
ANSI/TIA 568-D:2015	Balanced Twisted-Pair Telecommunications Cabling and Components Standards

Excel Solid Cat5e Cable U/UTP LSOH Euroclass B2ca 305m Box Violet

Item Code: 190-066



IEC 60754-2:2014

Test on gases evolved during combustion of materials from cables - Part 2: Determination of acidity (by pH measurement) and conductivity

IEC 61034-2:2005+A2:2020

Measurement of smoke density of cables burning under defined conditions - Part 2: Test procedure and requirements

EN 50575:2014 + A1:2016

Power, control and communication cables — Cables for general applications in construction works subject to reaction to fire requirements

RoHS

Compliant to the Restriction of Hazardous Substances

WFD

Compliant to Waste Framework Directive

SCIP

Compliant - Does Not Contain Substances of Concern in Products

Part Number Table

Part Number	Description
190-066	Excel Solid Cat5e Cable U/UTP LSOH Euroclass B2ca 305m Box Violet



KKMtech Sp. z o.o. | ul Santocka 39 71083 Szczecin POLAND

T: +48 91 462 44 12 | E: biuro@kkmtech.pl | W: www.kkmtech.pl