

DHI-TPC-BF2241-T

Thermal Network Hybrid Bullet Camera



- Vanadium oxide uncooled focal plane detector.
- 4Megapixel progressive scan CMOS.
- Offers various AI functions such as intrusion, target filtering, heat detection, smoking detection, and call detection.
- Temperature measurement range of -20°C to $+550^{\circ}\text{C}$.
- Built-in white light and speaker that produce light and sound alarms to deter intruders.
- Built-in IR LED, and the max. illumination distance 35 m.
- Dual image fusion (visible and thermal images).
- 12 VDC $\pm 20\%$ /PoE power supply.
- IP67 rated.

Featuring thermal and visible channels, Thermal Network Hybrid Bullet Camera offers various AI functions such as tripwire, intrusion, call detection, smoking detection, heat detection and temperature monitoring. It can be used in short-distance monitoring scenes such as perimeter protection and heat monitoring, which provides an all-in-one video surveillance solution for small and medium scenes.

Technical Specification	
Thermal	
Detector Type	Vanadium oxide uncooled focal plane detector
Effective Pixels	256 (H) \times 192 (V)
Pixel Pitch	12 μm
Spectral Range	8 μm –14 μm
Sensitivity (NETD)	$\leq 40 \text{ mK}@f/1.0$
Focal Length	3.5 mm; 7 mm
Field of View	3.5 mm: H: 50.6°; V: 37.8° 7 mm: H: 24°; V: 18°
Thermal Focus Control	Fixed-focal
Close Focus Distance	3.5 mm: 0.5 m (1.64 ft) 7 mm: 1 m (3.28 ft)
Digital Detail Enhancement (DDE)	Yes
Digital Zoom	16 levels
Thermal AGC	Auto/Manual
Thermal Noise Reduction	2D NR/3D NR
Image Flip	90°; 180°; 270°
Color Palettes	18 (white hot/black hot/fusion/rainbow/golden autumn/midday/iron red/amber/jade/sunset/icefire/painting/pomegranate/emerald /spring/summer/autumn/winter)
Temperature Measurement Range	High temperature mode: 0°C to $+550^{\circ}\text{C}$ ($+32^{\circ}\text{F}$ to $+1022^{\circ}\text{F}$) Low temperature mode: -20°C to $+150^{\circ}\text{C}$ (-4°F to $+302^{\circ}\text{F}$) Auto mode: -20°C to $+550^{\circ}\text{C}$ (-4°F to $+1022^{\circ}\text{F}$)

Temperature Measurement Accuracy	Max. ($\pm 2^{\circ}\text{C}$, $\pm 2\%$); (Temperature: -20°C to $+60^{\circ}\text{C}$)
Temperature Measurement Mode	Spot: 12 Line: 12 Area: 12 Supports 12 rules simultaneously
Visible	
Image Sensor	1/2.7" CMOS
Max. Resolution	2336 (H) \times 1752 (V)
Pixel	4 MP
Horizontal Definition	≥ 1600 TVL
Min. Illumination	Color: 0.05 lux B/W: 0.005 lux 0 lux (IR on)
Visible AGC	Auto/Manual
Visible Noise Reduction	2D NR/3D NR
S/N Ratio	≥ 55 dB
White Balance	Auto; indoor; outdoor; tracking; manual; natural; street lamp
Defog	Electronic defog
Electronic Shutter Speed	1 s–1/30,000 s (auto/manual)
BLC	Yes
WDR	DWDR
HLC	Yes
Day/Night	Auto (ICR); Color; B/W
Iris Control	Fixed

Image Flip	90°; 180°; 270°	PIP	Yes (Intelligence automatically turns off when PIP is on)
Exposure Compensation	Yes	Intelligence	
Visible Focus Control	Fixed-focal	Heat Detection	Yes
Focal Length	4 mm; 8 mm	Cold/Hot Spot Trace	Yes
Field of View	4 mm: H: 71.2°; V: 52° 8 mm: H: 33.4°; V: 25°	IVS (Perimeter Protection)	Yes. Supports tripwire and intrusion.
Close Focus Distance	4 mm: 1 m (3.28 ft) 8 mm: 2.5 m (8.20 ft)	Target Distinction	Human/Vehicle Classification
Aperture	4 mm: F1.6 8 mm: F2.0	Smoking Detection	Yes
Illuminator On/Off Control	Auto/Manual	Call Detection	Yes
Illumination Distance	4 mm: 35 m (114.83 ft) 8 mm: 50 m (164.04 ft)	Port	
Audio and Video		Network Port	1 × RJ-45 (10/100 Base-T)
Video Compression	H.265; H.264; H.264H	Alarm Input	1
Resolution	Thermal: Main stream: 1.3M (1280 × 960); XVGA (1024 × 768); VGA (640 × 480/256 × 192); 1280 × 960 (default) Sub stream: VGA (640 × 480/256 × 192); 256 × 192 (default) Visible: Main stream: 2336 × 1752; 1080p (1920 × 1080); 720p (1280 × 720); D1 (704 × 576); 2336 × 1752 (default) Sub stream: 720p (1280 × 720); D1 (704 × 576); CIF (352 × 288); 352 × 288 (default)	Alarm Output	1
	Thermal: Main stream: 1 fps–25 fps, 25 fps by default Sub stream: 1 fps–25 fps, 15 fps by default Visible: Main stream: 1 fps–25 fps, 25 fps by default Sub stream: 1 fps–25 fps, 15 fps by default	Audio Input	1
Video Frame Rate		Audio Output	1
Audio Compression	G.711a; G.711mu; PCM	RS-485	1
Image Encoding Format	JPEG	Power	
Function		Power Supply	12 VDC ± 20%, PoE (802.3af)
Two-way Audio	Yes	Power Consumption	Basic: <4.5 W (12 VDC); 4.9 W (PoE) Max: <11.8 W (12 VDC); 12.2 W (PoE)
Sound and Light Alarm	Yes	Environment	
Network Protocol	HTTPS; HTTP; TCP; ARP; RTSP; RTP; UDP; RTCP; SMTP; FTP; DHCP; DNS; DDNS; PPPOE; IPv4/v6; SNMP; QoS; UPnP; NTP	Operating Temperature	−30 °C to +60 °C (−22 °F to +140 °F)
Region of Interest (RoI)	Yes	Operating Humidity	≤95%
Storage	Micro SD card	Storage Temperature	−40 °C to +70 °C (−40 °F to +158 °F)
Micro SD Card (Max.)	256 GB	Physical Characteristics	
Interoperability	ONVIF; CGI; Dahua SDK	Protection	IP67
Browser	IE: IE 9 and later (Edge is not supported) Chrome: 42 and earlier Firefox: 42 and earlier	Reliability	Surge protection: 6 kV Air discharge of 15 kV Contact discharge of 8 kV
User/Host	Up to 10 (total bandwidth: 100 MB)	Structure	
Security	Authorized username and password; attached MAC address; encrypted HTTPS; IEEE 802.1x; controlled network access	Product Dimensions	279.9 mm × 103.8 mm × 95.8 mm (10.31" × 4.06" × 4.35") (L × W × H)
User Management	Up to 10 users; supports multi-level user permissions (2 levels): management group and user group	Packaging Dimensions	365 mm × 175 mm × 176 mm (14.37" × 6.89" × 6.92") (L × W × H)
Malfunction Detection	Network disconnection detection; IP conflict detection; memory card state detection; memory space detection	Net Weight	≤1.4 kg (3.09 lb)
Fusion Mode	Warm color; cold color; fuse with iron oxide red	Gross Weight	≤1.9 kg (4.19 lb)
Heat Detection Distance		Heat Detection Distance	
Focal Length	3.5 mm	Max. Distance	45 m (147.64 ft)
Focal Length	7 mm	Max. Distance	86 m (282.15 ft)
Note: The table displays the measured distances obtained from using the target size 0.2 m × 0.2 m for testing in an environment where the temperature is 23 °C and the relative humidity is below 60%. The table is for reference only. The distances within it are subject to actual conditions including atmospheric conditions, target size, the installation site, and more.			

Temperature Measurement Distance

Focal Length	Min. Distance	Max. Distance
3.5 mm	1 m (3.28 ft)	5 m (16.40 ft)
7 mm	2 m (6.56 ft)	8 m (26.25 ft)

Note:

The table displays the measured distances obtained from using the target size 0.1 m × 0.1 m for testing in an environment where the temperature is 23 °C and the relative humidity is below 60%.

The table is for reference only. The distances within it are subject to actual conditions including atmospheric conditions, target size, the installation site, and more.

DRI Distance

Focal Length	Detection Distance ^①	Recognition Distance ^②	Identification Distance ^③
3.5 mm	Vehicle: 447 m (1,466.54 ft); Human: 146 m (479.00 ft)	Vehicle: 112 m (367.45 ft); Human: 36 m (118.11 ft)	Vehicle: 56 m (183.73 ft); Human: 18 m (59.06 ft)
7 mm	Vehicle: 894 m (2,933.07 ft); Human: 292 m (958.01 ft)	Vehicle: 224 m (734.91 ft); Human: 73 m (239.50 ft)	Vehicle: 112 m (367.45 ft); Human: 36 m (118.11 ft)

- ① Detection Distance: Detects objects, but cannot recognize their characteristics (objects must cover more than 1.5 pixels of the image).
- ② Recognition Distance: Classifies objects into general categories, such as human, vehicle (the object must cover more than 6 pixels of the image).
- ③ Identification Distance: Classifies objects into specific categories based on their characteristics, such as engineering truck, car (the object must cover more than 12 pixels of the image).

Note:

The table is the standard theoretical calculation and is for reference only. The distances within it are subject to actual conditions including atmospheric conditions, target size, the installation site, and more. For the intelligent detection distance, refer to the table of Perimeter Protection Distance (IVS Distance) above.

Ordering Information

Type	Model	Description
Thermal Camera	DHI-TPC-BF2241-TB3F4-DW-S2	Thermal: 3.5 mm; Visible: 4 mm
	DHI-TPC-BF2241-TB7F8-DW-S2	Thermal: 7 mm; Visible: 8 mm
Accessories (Optional)	PFA121	Water-proof Junction Box (wall mount)
	PFA121+PFA150	Water-proof Junction Box + Pole Mount Bracket (pole mount)
	PFA121+PFA151	Water-proof Junction Box + Corner Mount Bracket (corner mount)
	PFM320D	Power Adapter

Accessories

Optional:



PFA121
Water-proof Junction
Box (wall mount)





PFA121+PFA150
Water-proof Junction
Box + Pole Mount
Bracket (pole mount)



PFA121+PFA151
Water-proof Junction
Box + Corner Mount
Bracket (corner mount)



PFM320D
Power Adapter

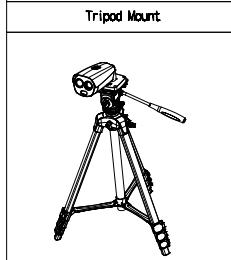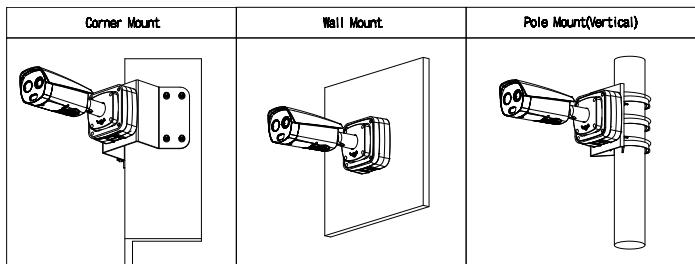

Dimensions (mm[inch])

