

# SPC-7000

System Control Keyboard




## Key Features

- 5" TFT touch LCD
- Network Camera / SSM / Analog Camera / DVR control
- User-friendly design and easy-to-use keypad
- 3 Axis joystick to control PTZ function
- Detachable joystick / jogshuttle for universe use (Right / Left hand use)
- USB interface support (1ea for SSM, 1ea for image snapshot / Upgrade)
- Fast camera-tile mapping, Config import / export

## Dimensions

Unit : mm (inch)

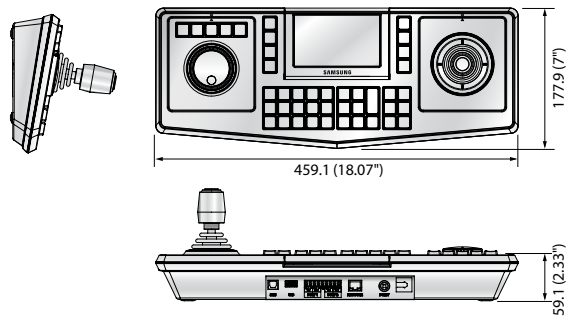

## SPC-7000

CoMMUNICATIoN		
Control Equipment	Network Camera / SSM / Analog Camera / DVR	
interface	Ethernet (Network camera)	
	USB (SSM) 1ea, USB 1ea (Upgrade, Config import/export, Image snapshot)	
	RS-485/422 (Analog Camera, DVR) 1ea, RS-485/422 (Cascade among controllers) 1ea	
interface Protocol	Ethernet	SUNAPI
	USB	Dedicated
	RS-485/422	SRD, Pelco-D/P, Panasonic, Vicon, AD, Honeywell, Bosch, Elmo, GE, Samsung-T/E
Units to Control	Network Camera : Max. 255ea, SSM : 1ea, Analog Camera / DVR : Max. 255ea	
Baud Rate (RS-485/422)	2400 ~ 57,600bps	
Network Protocol	TCP, HTTP, DHCP, IPv4	
oPERATIoNAL MEChANICAL		
LCD Display	5" TFT LCD	
Joystick	3 Axis twist zoom	
Jog Shuttle	SSM / DVR playback control	
CoNTRoL		
Camera	Pan / Tilt / Zoom, Focus, Auto focus, Preset, Group, Tour, Swing, Trace, Auto tracking, Alarm off/on, Freeze	
Video Wall	Camera-tile (Channel) mapping, Layout (Display division mode) change	
Recorder	Recording / Playback control, Alarm off, Menu	
Device Management	Built-in device registration / Modification on LCD	
User Management	Admin + 9 operators	
import / Export	Configuration import / export	
MiSCELLANEoUS		
Video Snapshot	Still image (Network camera) export using USB memory	
input	Alphabet input (Virtual keyboard)	
Language	English, Spanish, French, Italian, German, Turkish, Polish, Russian, Korean, Chinese, Japanese	
ENViRoNMENTAL		
o perating Temperature	0°C ~ 40°C (+32°F ~ +104°F)	
o perating humidity	20 ~ 85%	
ELECTRICAL		
input Voltage	12V DC	
Power Consumption	Max. 6.4W	
MEChANICAL		
Dimensions (WxHxD)	459.1 x 59.1 x 177.9mm (18.07" x 2.33" x 7")	
Weight	1.5Kg (3.3 lb)	

\* The latest product information / specification can be found at [hanwha-security.com](http://hanwha-security.com)

## System Configuration

