



# SPA-M1000

IP Microphone



## Key Features

- Output Level: +10dBV± 3dB
- Frequency Response: 100Hz ~ 18kHz
- Supported Protocol: IPv4, HTTP, SIP, mDNS, DNS, NTP, TCP, UDP, DHCP, ARP, ICMP
- Power: PoE (IEEE 802.3 af type 1 Class 3), Max.10W, DC24V
- Ethernet: 100/1000 Base-T

# SPA-M1000

IP Microphone



## Specifications

### Product

Type	IP Microphone
------	---------------

### Line Output

Output Level	+10dBV ± 3dB
Frequency Response	100Hz ~ 18kHz
THD + N Ratio (AES17 LPF)	Less than 0.1%
S/N Ratio (20kHz LPF, A-WTD)	greater than 65dB(MIC), greater than 75dB(AUX)

### Network

Ethernet	10/100 Base-T
----------	---------------

### General

Operating Temperature	-10 ~ +40°C (+14°F ~ +104°F)
Operating Humidity	10~85% RH (Non-Condensing)
Weight	1.29Kg
Size	200(W) x 73(H) x 206(D)mm
Color	Black & Gray
Certificate	EMC : KS C 9832/9835, EN 55032/55035, FCC Part 15 Subpart B, ICES-003 Safety : UL 62368-1, CAN/CSA C22.2 No.2 62368-1

### Power

PoE	PoE (IEEE 802.3 af type 1 Class 3), Max.10W, DC24V
-----	--

### Embedded MIC

Input Sensitivity	-50dBV ± 3dB
Frequency Response	100Hz ~ 18kHz

### Network Protocol

Supported Protocols	IPv4, HTTP, SIP, mDNS, DNS, NTP, TCP, UDP, DHCP, ARP, ICMP
---------------------	--

### System Integration

API (Application Programming Interface)	SUNAPI
Functional Monitoring	Connection verification, Built-in system logging


# SPA-M1000

IP Microphone



CAD

Unit: mm [inch]

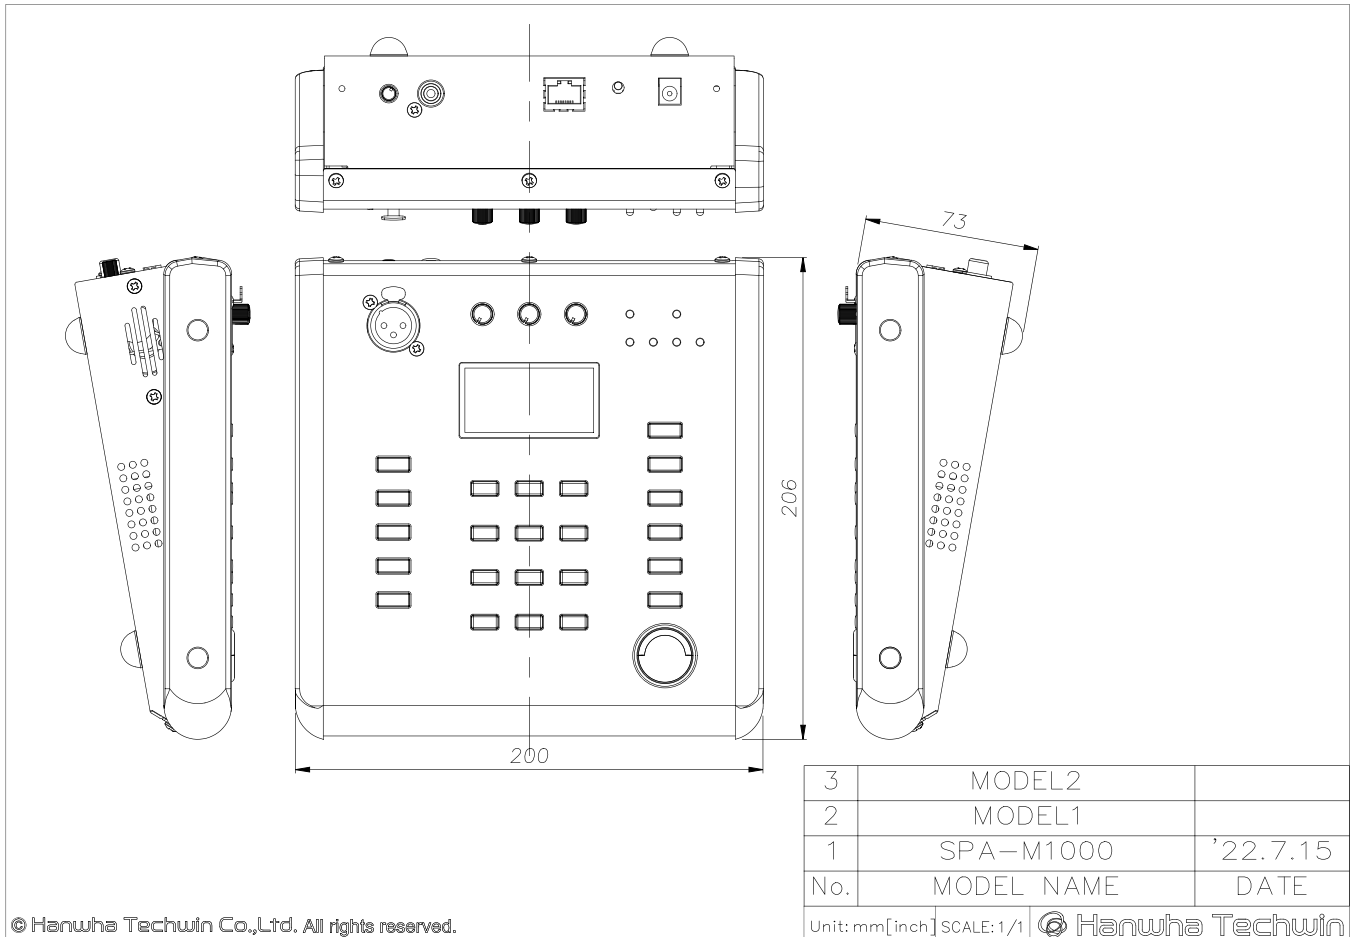

© Hanwha Techwin Co.,Ltd. All rights reserved.