

AS280G3

Indoor siren, metal housing, NFA2P Grade 3


Product overview

With an elegant design, this siren can be installed in a wide variety of environment up to light industrial situations.

Designed to comply against EN Grade 3 certification, the siren includes an enhanced protection against sabotage. The battery and power supply are fully supervised.

As soon as an intrusion is detected, the indoor siren triggers a powerful 105 dB sound signal.

Its sound and duration can be programmed and its battery has up to 60 hours autonomy.

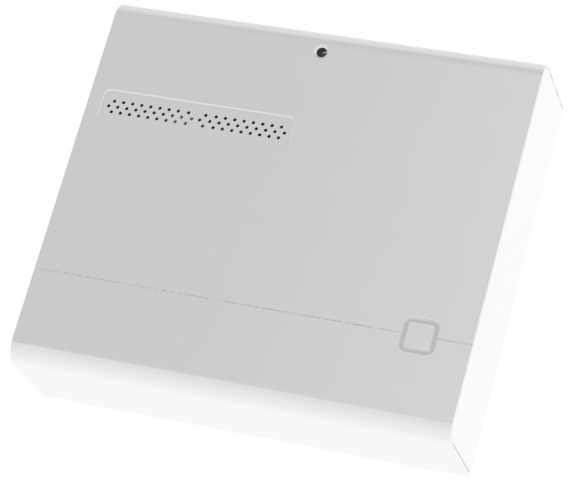

Details

- Battery circuit protection with resettable fuse
- Enhanced tamper protection
- Aritech elegant design
- Self test every 24 hours to check the integrity of the battery and its charging circuit
- Engineer mode (for commissioning and to inhibit sounder operation)

AS280G3

Indoor siren, metal housing, NFA2P Grade 3

Technical specifications

Ogólne

Grupa akcesoriów	Syrena
Typ	Syrena wewnętrzna
Sounder output (dB @ distance)	105 dB at 1 m (typical)

Flash specifications

Current consumption	10 mA @ 13.8 V (quiescent)
---------------------	----------------------------

Elektryczne

Typ zasilacza	9 VAC
Napięcie znamionowe	9 to 15 V
Pobór prądu	100 mA at 9 to 15 VDC (typical)

Fizyczne

Wymiary	187 x 167 x 47 mm
Masa netto	1340 g
Kolor	Biały
Tworzywo	Stal (malowana)

Środowiskowe

Wandaloodporna	Yes
Temperatura pracy	-10 to 55°C
Temperatura magazynowania	-10 to 55°C
Wilgotność względna	<95% noncondensing
Środowisko	EN50130-5 ; Class II - Indoor (General)
Szczelność IP	IP30

Regulatory

Zgodność	CE
Certyfikacja	EN50131 Grade 3
Standardy	NFA2P Grade 3



Będąc firmą innowacyjną, Carrier Fire & Security zastrzega sobie prawo do zmian w specyfikacji wyrobów bez uprzedzenia. W celu uzyskania najnowszych specyfikacji prosimy o wizytę na stronie [pl/firesecurityproducts.com](http://firesecurityproducts.com) lub kontakt z przedstawicielem handlowym.

Last updated on 5 May 2023 - 10:40