



Simplify Your Meeting Room

Built on the Android OS platform; Meetboard® are designed to get meetings and presentations going right away, without the need for projectors, whiteboards or installing additional software. Eliminate cable clutter and enjoy a clean and organized meeting room thanks to wireless mirroring options. Present, brainstorm and take notes without cables in between or markers that are running out of ink.
















Quickly Start Meeting Enjoy Clear Image Presentation Save and Share Files Instantly

The New Generation of Meetings AG Neovo

AG Neovo's IFP-Series, Meetboard, is the all-around interactive display that streamlines the meetings process. Since meetings can't wait for slow loading screens, Meetboard's on-board whiteboard app and launcher allows participants to directly access materials and get the meeting going without delay. Meeting materials and presentations are bright and crisp on the 4K display, ensuring that content is clear and compelling. And files and notes relevant to the meeting can be shared with ease, through QR code, email, or cloud drives.

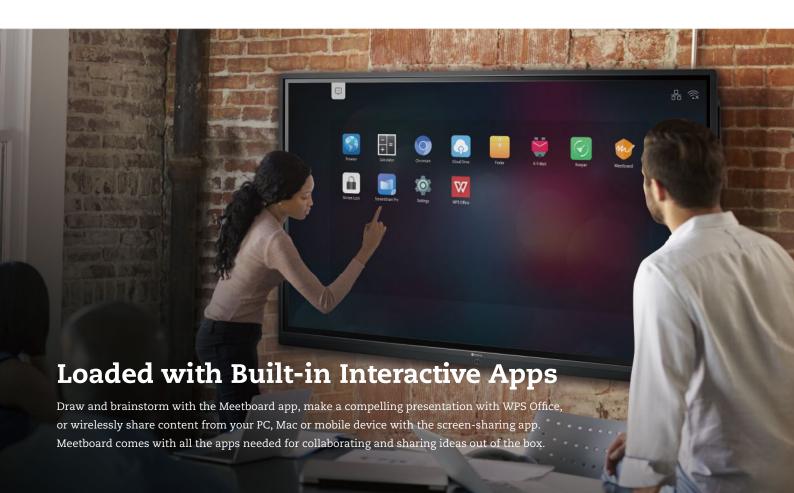



Meetboard App

User-friendly interactive whiteboard software designed for interactive meetings and group discussions.







Writing & Drawing

Participants can draw and insert images for demonstrating ideas.

Dual Pens

Two styluses for simultaneous annotation with two colours.

Easy Share

Instantly share meeting files via email, QR code and cloud drives.



Connecting People and Devices has Never Been Easier

Collaborating on projects requires not only the input of your team, but also their devices and content. That is why Meetboard supports 802.11ac Wi-Fi and Bluetooth. A powerful screen-sharing app makes those connections extremely usable; It enables device mirroring and remote controlling from individual devices, no matter what operating systems your team members use: Windows 11, macOS, Android, or iOS.

Made for Hands-On Collaboration

Engaging with ideas over an electronic display can often present hurdles to participation. Meetboard lowers those hurdles with multi-touch and natural writing capabilities. Multiple participants, using their fingers or styluses, can simultaneously draw and annotate on Meetboard as intuitive as using a whiteboard.

Another common obstacle is not having the right driver for your content, an obstacle Meetboard does away with. Its Plug-and-Play Windows support allows Windows users to activate applications like PowerPoint and OneNote directly on the display—all without additional drivers.





Assistive Menu Lets Your Team Focus on What Matters

Meetings shouldn't stop for technical issues. Enter Meetboard's dedicated assistive menu, which works on any input source and Android apps, giving participants the power to access certain functions and shortcuts, like adjusting audio/brightness, capturing screenshots, toggling between tasks, and taking down notes.

Meet Your Team Remotely Everywhere

AG Neovo brings an FMC-06 floor mounting cart to life to fulfil the needs of on-site and virtual collaborations in the changing world. You can quickly install Meetboard on FMC-06 without additional effort and bring all the accessories together; meanwhile, ensure the display remains secure with lockable castors. With excellent mobility and user-friendly design, Meetboard brings the collaborative meeting to the next level out of your imagination.



Features

- 4K UHD 3840 x 2160 resolution
- IPS Panel technology offers high colour accuracy and wide viewing angles
- Incorporates IR touch technology
- ScreenShare Pro App for multi-display sharing
- Instant meeting files sharing via email, QR code and built-in cloud drives
- 20-point simultaneous multi-touch capability
- Windows 11 ready plug and play support for Windows 7/8/10/11
- User-friendly whiteboard application for collaborative meetings
- $\ensuremath{^{\bullet}}$ Two styluses for simultaneous annotation with two colours
- View, edit & create office documents with WPS Office Suite App
- Android OS 8.0
- $\ensuremath{^{\bullet}}$ Built-in USB 3.0 for faster transfer speeds with storage devices
- Built-in speakers and audio mini-jack in/out connection
- Wall mount and Wi-Fi module are included for quick installation



THE DISPLAY CHOICE OF PROFESSIONALS

| | Specifications | IFP-6502 | IFP-7502 |
|--|--|--|--|
| Mach Same Same Same Same Same Same Same Same | • | | |
| No book of March 1988 1989March 1989 19891898 1989 19891898 19891898 19891898 19891898 19891898 19891898 19891898 19891898 1989 19891898 | | LED-Backlit TFT LCD (IPS Technology) | LED-Backlit TFT LCD (IPS Technology) |
| ## Profession | Panel Size | 64.5 | 74.5 |
| Marchan | Max. Resolution | UHD 3840 x 2160 | UHD 3840 x 2160 |
| Carron In Basis 1900 1907 190 | Pixel Pitch | 0.372 mm | 0.430 mm |
| Verwing Agable More (Proposition of State | Brightness | 350 cd/m ² | 350 cd/m ² |
| 100 | | | |
| Semination Sem | | | |
| Series Professional of Series Professional (Series Poly, 1) (Indicatoring Series Poly) (Series Poly) | | | |
| Transmist Tra | | | |
| Fragenity (Fragenity (Fragenity Company) 1984 Register (Fragenity Company) 1987 Per Park Property Company (Fragenity Company) 1987 Per | | Anti-Glare Treatment (Haze 25%), 3H Hard Coating | Anti-Glare Treatment (Haze 28%), 2H Hard Coating |
| Tree protection of the Control of Standard Stan | | 00 kH= 00 kH= | 20 11 - 00 11 - |
| Separation | | | |
| SEMIOR 2 8 3 8 3 10 10 10 10 10 10 10 10 10 10 10 10 10 | | 30 NZ-70 NZ | 30 nz-76 nz |
| NA 1-fm 1-sin 2-sin 3-sin 1 Ingland Longer 1-fm 1-sin 2-sin 3-sin 1 Ingland Longer 2 x 3 Instanta 2 x 3 x 3 Exception 4 x 3 x 3 x 3 Instanta 2 x 3 x 3 x 3 Instanta 2 x 3 x 3 x 3 x 3 Instanta 2 x 3 x 3 x 3 x 3 x 3 Instanta 3 x 3 x 3 x 3 x 3 x 3 x 3 Instanta 3 x 3 x 3 x 3 x 3 x 3 x 3 x 3 x 3 x 3 x | | 2 A v 2 | 20 v 2 |
| | | | |
| Section Sect | | 15 III b Sub X I | 15 THE SUCKE |
| ### 1802 # | | 2 0 x 1 | 20 x 1 |
| Section 1982 | | 10 / 1 | |
| ## ## ## ## ## ## ## ## ## ## ## ## ## | | 9-Pin D-Sub | 9-Pin D-Sub |
| Section Sect | | | |
| ISS Authorität 60 Authorität 60 <td></td> <td></td> <td></td> | | | |
| The Content of State | | Android 8.0 | Android 8.0 |
| Storage 16 CB 16 CB 18 CB < | | | |
| ### ### ### ### ### ### ### ### ### ## | Memory | 3 GB | 3 GB |
| Other Conservative Seed Support Suppor | Storage | 16 GB | 16 GB |
| USB 2 x x / 3 x / 3 x x / 3 x x / 3 x x / 3 x x / 3 x x / 3 x x / 3 x x x x | | | |
| Availa (Dam) Steven Audio Jack (2.5 mm) APTOW Steven Audio Jack (3.5 mm) APTOW Markin (Dam) Steven Audio Jack (3.5 mm) APTOW Steven Audio Jack (3.5 mm) APTOW Troth Troth 16W x 2 16W x 2 Troth Steven USS 2.0 x 2 (type-8) 16Thread Touch Transe Technology Infrared Touch Transe 155 month Story (Park) Vindows 2000/37Vistox (6.6 mas C9) Windows 2000/37Vistox (6.6 mas C9) Story (Park) Vindows 2000/37Vistox (6.6 mas C9) Windows 2000/37Vistox (6.6 mas C9) Story (Park) Vindows 2000/37Vistox (6.6 mas C9) Windows 2000/37Vistox (6.6 mas C9) While Story (Park) Vindows 2000/37Vistox (6.6 mas C9) Windows 2000/37Vistox (6.6 mas C9) While Story (Park) Vindows 2000/37Vistox (6.6 mas C9) Windows 2000/37Vistox (6.6 mas C9) While Story (Park) Vindows 2000/37Vistox (6.6 mas C9) Windows 2000/37Vistox (6.6 mas C9) While Story (Park) Vindows 2000/37Vistox (6.6 mas C9) Windows 2000/37Vistox (6.6 mas C9) While Story (Park) Vindows 2000/37Vistox (6.6 mas C9) Windows 2000/37Vistox (6.6 mas C9) While Story (Park) Vindows 2000/37Vistox (6.6 mas C9) Windows 2000/37Vistox (6.6 ma | JSB | 2.0 x 3 / 3.0 x 3 | 2.0 x 3 / 3.0 x 3 |
| Auction Content Series Audio Jack (0.5 mm), SPOIF Series Audio Jack (0.5 mm), SPOIF Internal Speakers 18 % X 20 % X <td>Audio</td> <td></td> <td></td> | Audio | | |
| mineral Speakers Wi w 2 Touch Screen USB 20 x 2 (Type B) USB 20 x 2 (Type B) Technology Infared Touch Farme Infared Touch Farme Technology Infared Touch Farme Infared Touch Farme Still Single Touch Plage Play Windows 2000/Place 6.0, mac/OS Windows 2000/Place 6.0, mac/OS Willist Souch Plage A Play Windows 2000/Place 6.0, mac/OS Windows 2000/Place 6.0, mac/OS Willist Souch Plage A Play Windows 2000/Place 6.0, mac/OS Windows 2000/Place 6.0, mac/OS Willist Souch Plage A Play Windows 2000/Place 6.0, mac/OS Windows 2000/Place 6.0, mac/OS Willist Souch Plage A Play Windows 2000/Place 6.0, mac/OS Windows 2000/Place 6.0, mac/OS Willist Souch Plage A Play Windows 2000/Place 6.0, mac/OS Windows 2000/Place 6.0, mac/OS Willist Souch Plage A Play Windows 2000/Place 6.0, mac/OS Windows 2000/Place 6.0, mac/OS Willist Souch Plage A Play Windows 2000/Place 6.0, mac/OS Windows 2000/Place 6.0, mac/OS Willist Souch Plage A Play Windows 2000/Place 6.0, mac/OS Windows 2000/Place 6.0, mac/OS Black State State A Play Windows 2000/Place 6.0, mac/OS Windows 2000/Place 6.0, mac/OS Windows 2 | Audio In | Stereo Audio Jack (3.5 mm) | Stereo Audio Jack (3.5 mm) |
| Tree | Audio Out | Stereo Audio Jack (3.5 mm), S/PDIF | Stereo Audio Jack (3.5 mm), S/PDIF |
| Panel Interface USB 2 D x 2 (Type-B) Cerebinal Content (Insured Touch Insure Interface) Infrared Touch Insure Infrared Touch Insure Infrared Touch Insure Infrared Touch Insure Insured Touch Insured Touch Insured Touch Insured Insured Touch Insured Touch Insured Touch Insured Touch Insured Insured Touch In | nternal Speakers | 16W x 2 | 16W x 2 |
| Infrared Touch Frame | Touch Screen | | |
| | Panel Interface | USB 2.0 x 2 (Type-B) | USB 2.0 x 2 (Type-B) |
| Single Touch Plug & Play Windows 2000XPV/tstWCE 6.0, macOS Multi-touch Plug & Play Windows 78/10/11, Android/Linux (Bernel version 3.5+), Chrome OS (90 anbowe) Windows 78/10/11, Android/Linux (Bernel version 3.5+), Chrome OS (90 anbowe) Windows 78/10/11, Android/Linux (Bernel version 3.5+), Chrome OS (90 anbowe) Windows 78/10/11, Android/Linux (Bernel version 3.5+), Chrome OS (90 anbowe) Windows 2000XPV/tstWCE 6.0, macOS Power Suppir Internal Internal Internal Power Suppir Internal A 100-240V, 50/60 Hz ADD -240V, 50/60 Hz On Mode 155W ADD -240V, 50/60 Hz ADD -240V, 50/60 Hz Off Mode 40 SW ADD -240V, 50/60 Hz ADD -240V, 50/60 Hz Off Mode 40 SW ADD -240V SW ADD -240V SW Standardy Mode 40 SW ADD -240V SW ADD -240V SW Standardy Mode 40 SW ADD -240V SW ADD -240V SW Standardy Mode 40 SW ADD -240V SW ADD -240V SW Standardy Mode 40 SW ADD -240V SW ADD -240V SW Standardy Mode 40 SW ADD -240V SW | Fechnology | Infrared Touch Frame | Infrared Touch Frame |
| Multi-touch Bug & Play Windows 7/8/10/11, Android/Linux (ternel version 3.5+), Chrome OS (99 or abow) Windows 7/8/10/11, Android/Linux (ternel version 3.5+), Chrome OS (99 or abow) Multi-touch Support by Driver macOS (supported by UPDD driver) Power Supply Internal Nower Supply Internal AC 100-240V, 50/50 Hz On Mode 155W 4C 100-240V, 50/50 Hz Distandly Mode < 0.5W < 0.5W Standly Mode < 0.5W < 0.5W In Mode 4.0 mm (0.16*) < 0.5W Internal < 0.5W < 0.5W Internal 4.0 mm (0.16*) < 0.5W Internal < 0.5W < 0.5W Internal 4.0 mm (0.16*) < 0.5W Internal 4.0 mm (0.16*) < 0.5W Reflection Rate 4.0 mm (0.16*) < 1.0% Reflection Rate 4.0 mm (0.16*) < 1.0% Reflection Rate 8.8% Rations 2.8 SS Ration Science 2.0 C 40°C (22°F-104°F) 0.0 C 40°C (22°F-104°F) Runnitity 1.0 %-90% (non-condensi | | | |
| Multi-touch Support by Driver macOS (supported by UPDD driver) macOS (supported by UPDD driver) Power Verwer Verwer Power Stapply Internal Internal Power Requirements AC 100-2407, 50/60 Hz AC 100-2407, 50/60 Hz On Mode 4.55 W CL 100-2400 CL 100-2407, 50/60 Hz Standby Mode 4.05 W CL 100-2407, 50/60 Hz CL 100-2407, 50/60 Hz Off Mode 4.05 W CL 100-2407, 50/60 Hz CL 100-2407, 50/60 Hz Off Mode 4.05 W CL 100-2407, 50/60 Hz CL 100-2407, 50/60 Hz Standby Mode 4.05 W CL 200-2407, 50/60 Hz CL 200-2407, 50/60 Hz Class 4.07 Mm (0.16°) AD mm (0.16°) CL 200-2407, 50/60 Hz CL 200-2407, 50/60 Hz Hardness 8.84 AB AB CL 200-2407, 50/60 Hz CL 200-2407, 50/60 Hz <th< td=""><td></td><td></td><td></td></th<> | | | |
| Power Power Stapply Internal Internal Power Stapply AC 100-2407, 50/60 Hz AC 100-2407, 50/60 Hz On Mode 155W Can Understand 165W Standby Mode 0.5W 0.5W 0.5W Off Mode 0.5W 0.5W 0.5W Classing Classing 4.0 mm (0.16") 0.0W Classing Classing 4.0 mm (0.16") 0.0W Classing 4.0 mm (0.15") 0.0W Classing 4.0 mm (0.15") 0.0W Classing 6.0 mm (0.15") 0.0W 0.0W <td< td=""><td></td><td></td><td></td></td<> | | | |
| Fower Rigulpy Internal Internal Prover Requirements AC 100-240V, 5060 Hz AC 100-240V, 5060 Hz On Mode 155W 150W Standty Mode < 0.5W < 0.5W < 0.5W Off Mode < 0.5W < 0.5W < 0.5W Glass W < 0.5W < 0.5W Glass W < 0.5W < 0.5W Glass W < 0.5W < 0.5W Glass < 0.5W < 0.5W < 0.5W Glass < 0.5W < 0.5W < 0.5W Transmission Rate < 8.8% < 0.5W < 0.5W Glass < 8.1M < 0.5W < 0.5W Glass < 8.9% < 0.5W < 0.5W < | | macOS (supported by UPDD driver) | macOS (supported by UPDD driver) |
| Power Requirements AC 100-240V, 50/60 Hz AC 100-240V, 50/60 Hz On Mode 155W 165W Standby Mode < 0.5W < 0.5W Off Mode < 0.3W < 0.3W Class US < 0.0W Tribiciness A 0.mm (0.1c*) 4.0 mm (0.1c*) Reflection Rate < 10% < 1.0% Reflection Rate < 88% < 1.0% < 1.0% Italiandess 2.8 Hz < 1.0% < 1.0% Idlandess 2.8 Hz < 1.0% < 1.0% Idlandess 2.8 Hz < 1.0% < 1.0% Objecting Conditions 2.0% < 0.0% C40°C (22°F-104°F) 0.0% (1.0% condensing) 0.0% (1.0% condensing) Humility 10%-90% (non-condensing) 10%-90% (non-condensing) 10%-90% (non-condensing) 10%-90% (non-condensing) Humility 10%-90% (non-condensing) 10%-90% (non-condensing) 10%-90% (non-condensing) 10%-90% (non-condensing) Product w/Sa Fay Pay Mark 10%-90% (non-condensing) 10%-90% (non-condensing) 10%-90% (non-condensing) 10%-90% (non-condensing) < | | | |
| Description | ** * | | |
| Standby Mode < 0.5W | * | | |
| Off Mode < 0.3W < 0.3W Class Units < 0.9 mm (0.16") Itchichers 4.0 mm (0.16") < 1.0% Reflection Rate < 1.0% < 1.0% It ranshission Rate < 8.8% < 8.8% Idardness 2.8 H Gloss 7.55 GU Operating Conditions Temperature 0°C-40°C (22°F-104°F) O°C-40°C (32°F-104°F) Humidity 1.0%-90% (non-condensing) 0°C-40°C (32°F-104°F) Humidity 2.0%-60°C (4°F-140°F) 2.0%-60°C (4°F-140°F) Humidity 1.0%-90% (non-condensing) 1.0%-90% (non-condensing) Hounting Ves (600 x 400 mm) Yes (800 x 400 mm) WESA FRAMM Yes (600 x 400 mm) Yes (800 x 400 mm) Discussions Product Wo Base (W x H x D) 489.0 x 89.70 x 86.0 mm (65.5° x 35.3° x 3.4°) 171.00 x 1020.0 x 86.0 mm (76.3° x 40.2° x 3.4°) Packaging (W x H x D) 489.0 x 89.0 x 89. | | | |
| Clases 4.0 mm (0.16°) 4.0 mm (0.16°) Reflection Rate 4.0% 4.0 mm (0.16°) Reflection Rate ≥ 88% 2 88% Hardness ≥ 88 2 88 Hardness ≥ 81 2 88 Gloss 7 55 GU 755 GU Operating Conditions 3 50 GU 755 GU Flemperature 0° C-40°C (2°F-104°F) 0° C-40°C (2°F-104°F) Humbity 10%-90% (non-condensing) 10%-90% (non-condensing) Storage Conditions Temperature 20°C-60°C (4°F-140°F) 20°C-60°C (4°F-140°F) Humbity 0° 50% (non-condensing) 10%-90% (non-condensing) 10%-90% (non-condensing) Humbity 0° 50% (non-condensing) 10%-90% (non-condensing) 10%-90% (non-condensing) Humbity 0° 50% (non-condensing) 10%-90% (non-condensing) 10%-90% (non-condensing) Humbity 10% 50% (non-condensing) 10%-90% (non-condensing) 10%-90% (non-condensing) Product w/so Base (W x H x D) 456 (50 x 400 mm) 10%-90% (non-condensing) 10%-90% (non-condensing) 10%-90% (non-condensing) Product w/so Ba | • | | |
| Thickness 4.0 mm (0.16") 4.0 mm (0.16") Reflection Rate c10% c10% Transmission Rate 2.88% 2.88% Hardness 2.81 2.81 Gloss 7.92.5 GU 7.92.5 GU Operating Conditions V V Hundidy 0%-0% (22°F-104°F) 0%-0% (00°C-00°C-10°F-140°F) Hundidy 10%-90% (non-condensing) 20°C-60°C-14°F-140°F) Hundidy 10%-90% (non-condensing) 20°C-60°C-14°F-140°F) Hundidy 10%-90% (non-condensing) 20°C-60°C-14°F-140°F Hundidy 10%-90% (non-condensing) 10%-90% (non-condensing) Hundidy 10%-90% (non-condensing) 20°C-60°C-14°F-140°F Hundidy 10%-90% (non-condensing) <t< td=""><td></td><td>< 0.3 W</td><td>< 0.3W</td></t<> | | < 0.3 W | < 0.3W |
| Reflection Rate < 10% | | 4.0 mm (0.16") | 4.0 mm (0.16") |
| Transmission Rate ≤ 88% ≤ 88% Hardness ≤ 8H ≤ 8H Gloss 75± GU 75± GU Poperating Conditions "C-40°C (32°F-104°F) 0°C-40°C (32°F-104°F) Hundidity 10%-90% (non-condensing) 10%-90% (non-condensing) Storage Conditions | | | |
| ### ### ### ### ### ### ### ### ### ## | | | |
| Closs 75±5 GU 75±5 G | | | |
| Operating Conditions Cremperature 0°C-40°C (32°F-104°F) 0°C-40°C (32°F-104°F) Humidity 10%-90% (non-condensing) 10%-90% (non-condensing) Storage Conditions -20°C-60°C (4°F-140°F) -20°C-60°C (4°F-140°F) Humidity 10%-90% (non-condensing) 10%-90% (non-condensing) Humidity 20°C-60°C (4°F-140°F) 10%-90% (non-condensing) Humidity 10%-90% (non-condensing) 10%-90% (non-condensing) Mounting yes 10%-90% (non-condensing) Post FPMMI Yes (800 x 400 mm) Yes (70% (20°C (4°F-140°F)) Product w/o Base (W x H x D) 489.0 x 897.0 x86.0 mm (58.6° x 35.3° x 3.4°) 171.00 x 1020.0 x 86.0 mm (67.3° x 40.2° x 3.4°) Product w/o Base (W x H x D) 489.0 x 897.0 x86.0 mm (58.6° x 35.3° x 3.4°) 171.00 x 1020.0 x 86.0 mm (67.3° x 40.2° x 3.4°) Product w/o Base (W x H x D) 489.0 x 897.0 x86.0 mm (58.6° x 35.3° x 3.4°) 171.00 x 1020.0 x 86.0 mm (67.3° x 40.2° x 3.4°) Product w/o Base (W x H x D) 489.0 x 897.0 x86.0 mm (58.6° x 35.3° x 3.4°) 50.6 kg (111.6 lb) 50.6 kg (111.6 lb) Product w/o Base (W x H x D) 50.9 kg (20.1 b) 50.6 kg (111.6 lb) 50.6 kg (111.6 lb) Product w/o Base (W x | | | |
| Temperature 0°C-40°C (32°F-104°F) 0°C-40°C (32°F-104°F) Humidity 10%-90% (non-condensing) 10%-90% (non-condensing) Storage Conditions 10%-90% (non-condensing) 10%-90% (non-condensing) Humidity 10%-90% (non-condensing) 20°C-60°C (-4°F-140°F) Humidity 10%-90% (non-condensing) 10%-90% (non-condensing) Mounting VESA FPMPMI Yes (600 x 400 mm) Yes (800 x 400 mm) Dimensions Product w/o Base (W x H x D) 1489.0 x 897.0 x86.0 mm (58.6° x 35.3° x 3.4") 710.0 x 1020.0 x 86.0 mm (67.3° x 40.2° x 3.4") Peckaging (W x H x D) 165.60 x 1050.0 x 204.0 mm (65.2° x 41.3° x 8.0") 1860.0 x 1140.0 x 280.0 mm (73.2° x 44.9° x 11.0") Weight Product w/o Base 30.0 kg (86.0 lb) 50.6 kg (111.6 lb) Packaging 50.7 kg (122.8 lb) 72.9 kg (160.7 lb) Regulation Approval CE, LVD, FCC, WEEE, REACH, ROHS, BSMI CE, LVD, FCC, WEEE, REACH, ROHS, BSMI Accessories Supplied Power Cord, HDMI Cable, USB Cable, Remote Control, Batteries, Quick Start Guide, Touch Pen, Wall Mount, Wi-Fi/ Bluetooth Module Power Cord, HDMI Cable, USB Cable, Remote Control, Batteries, Quick Start Guide, Touch Pen, Wall Mount, Wi-Fi/ Bluetooth Module FMC-03+LMK-04, FMC-04+LMK-04, FMC-0 | | | |
| Humidity 10%-90% (non-condensing) 10%-90% (non | | 0°C-40°C (32°F-104°F) | 0°C-40°C (32°F-104°F) |
| Storage Conditions | | | |
| Temperature -20°C-60°C (-4°F-140°F) -20°C-60°C (-4°F-140°F) 10%-90% (non-condensing) 10%-90% | | \ Or | V 07 |
| Humidity 10%-90% (non-condensing) 10%-90% (non | | -20°C-60°C (-4°F-140°F) | -20°C-60°C (-4°F-140°F) |
| Mounting VESA FPMPMI | | | |
| VESA FPMPMI Yes (600 x 400 mm) Yes (800 x 400 mm) Dimensions Product w/o Base (W x H x D) 1489.0 x 897.0 x86.0 mm (58.6" x 35.3" x 3.4") 1710.0 x 1020.0 x 86.0 mm (67.3" x 40.2" x 3.4") Packaging (W x H x D) 165.0 x 1050.0 x 204.0 mm (65.2" x 41.3" x 8.0") 1860.0 x 1140.0 x 280.0 mm (73.2" x 44.9" x 11.0") Weight Product w/o Base 39.0 kg (86.0 lb) 50.6 kg (111.6 lb) Packaging 55.7 kg (122.8 lb) 72.9 kg (160.7 lb) Regulation Approval Certifications & Compliance CE, LVD, FCC, WEEE, REACH, ROHS, BSMI CE, LVD, FCC, WEEE, REACH, ROHS, BSMI Accessories Supplied Power Cord, HDMI Cable, USB Cable, Remote Control, Batteries, Quick Start Guide, Touch Pen, Wall Mount, Wi-Fi / Bluetooth Module Power Cord, HDMI Cable, USB Cable, Remote Control, Batteries, Quick Start Guide, Touch Pen, Wall Mount, Wi-Fi / Bluetooth Module Optional Accessories FMC-03+LMK-04, FMC-04+LMK-04, FMC-06 FMC-03+LMK-04, FMC-04+LMK-04, FMC-06 Celling Mount (Landscape only) CMC-01+LMK-04, FMC-04+LMK-04, FMC-06 FMC-03+LMK-04, FMC-04+LMK-04, FMC-06 | | | |
| Product w/o Base (W x H x D) 1489.0 x 897.0 x86.0 mm (58.6" x 95.3" x 3.4") 1710.0 x 1020.0 x 86.0 mm (67.3" x 40.2" x 3.4") 1860.0 x 1140.0 x 280.0 mm (67.3" x 40.2" x 3.4") 1860.0 x 1140.0 x 280.0 mm (67.3" x 44.9" x 11.0") 1860.0 x 1140.0 x 280.0 mm (67.3" x 44.9" x 11.0") 1860.0 x 1140.0 x 280.0 mm (67.3" x 44.9" x 11.0") 1860.0 x 1140.0 x 280.0 mm (67.3" x 44.9" x 11.0") 1860.0 x 1140.0 x 280.0 mm (67.3" x 44.9" x 11.0") 1860.0 x 1140.0 x 280.0 mm (67.3" x 44.9" x 11.0") 1860.0 x 1140.0 x 280.0 mm (67.3" x 44.9" x 11.0") 1860.0 x 1140.0 x 280.0 mm (67.3" x 44.9" x 11.0") 1860.0 x 1140.0 x 280.0 mm (67.3" x 44.9" x 11.0") 1860.0 x 1140.0 x 280.0 mm (67.3" x 44.9" x 11.0") 1860.0 x 1140.0 x 280.0 mm (67.3" x 44.9" x 11.0") 1860.0 x 1140.0 x 280.0 mm (67.3" x 40.2" x 3.4") 1860.0 x 1140.0 x 280.0 mm (67.3" x 40.2" x 3.4") 1860.0 x 1140.0 x 280.0 mm (67.3" x 40.2" x 3.4") 1860.0 x 1140.0 x 280.0 mm (67.3" x 40.2" x 3.4") 1860.0 x 1140.0 x 280.0 mm (67.3" x 40.2" x 3.4") 1860.0 x 1140.0 x 280.0 mm (67.3" x 40.2" x 3.4") 1860.0 x 1140.0 x 280.0 mm (67.3" x 40.2" x 3.4") 1860.0 x 1140.0 x 280.0 mm (67.3" x 40.2" x 3.4") 1860.0 x 1140.0 x 280.0 mm (67.3" x 40.2" x 3.4") 1860.0 x 1140.0 x 280.0 mm (67.3" x 40.2" x 3.4") 1860.0 x 1140.0 x 280.0 mm (67.3" x 40.2" x 3.4") 1860.0 x 1140.0 x 280.0 mm (67.3" x 40.2" x 3.4") 1860.0 x 1140.0 x 280.0 mm (67.3" x 40.2" x 3.4") 1860.0 x 1140.0 x 280.0 mm (67.3" x 40.2" x 3.4" 1860.0 x 1140.0 x 280.0 mm (67.3" x 40.2" x 3.4" 1860.0 x 1140.0 x 280.0 mm (67.3" x 40.2" x 3.4" 1860.0 x 1140.0 x 280.0 mm (67.3" x 40.2" x 41.9" x 11.0" 1860.0 x 1140.0 x 280.0 mm (67.3" x 40.2" x 41.9" x 11.0" 1860.0 x 1140.0 x 280.0 mm (67.3" x 40.2" x 41.9" x 11.0" 1860.0 x 1140.0 x 280.0 mm (67.3" x 40.2" x 41.9" x 11.0" 1860.0 x 1140.0 x 280.0 mm (67.3" x 40.2" x 41.9" x 11.0" 1860.0 x 1140.0 x 280.0 mm (67.3" x 40.2" x 41.9" x 11.0" 1860.0 x 1140.0 x 280.0 mm (67.3" x 40.2" x 41.9" x 11.0" 1860.0 x 1140.0 x 1140.0 x 11 | | Yes (600 x 400 mm) | Yes (800 x 400 mm) |
| Packaging (W x H x D) ### Refulation (Product w/o Base | Dimensions | | |
| Packaging (W x H x D) ### Refulation (Product w/o Base | | 1489.0 x 897.0 x86.0 mm (58.6" x 35.3" x 3.4") | 1710.0 x 1020.0 x 86.0 mm (67.3" x 40.2" x 3.4") |
| Weight Product w/o Base 39.0 kg (86.0 lb) 50.6 kg (111.6 lb) Packaging 55.7 kg (122.8 lb) 72.9 kg (160.7 lb) Regulation Approval Certifications & Compliance CE, LVD, FCC, WEEE, REACH, ROHS, BSMI CE, LVD, FCC, WEEE, REACH, | roduct w/o base (w x n x D) | | |
| Packaging 55.7 kg (122.8 lb) 72.9 kg (160.7 lb) Regulation Approval Certifications & Compliance CE, LVD, FCC, WEEE, REACH, ROHS, BSMI CE, LVD, F | | | , |
| Regulation Approval Certifications & Compliance CE, LVD, FCC, WEEE, REACH, ROHS, BSMI CE, LVD, FCC, WEEE, RE | Packaging (W x H x D) | | , |
| Certifications & Compliance CE, LVD, FCC, WEEE, REACH, ROHS, BSMI CU, LUD, FCC, WEEE, REACH, ROHS, BSMI CU, LUD, FCC, WEEE, REACH, ROHS, BSMI CU, LUD, FCC, WEEE, REACH, R | Packaging (W x H x D) Weight | 1656.0 x 1050.0 x 204.0 mm (65.2" x 41.3" x 8.0") | |
| Accessories Supplied Power Cord, HDMI Cable, USB Cable, Remote Control, Batteries, Quick Start Guide, Touch Pen, Wall Mount, Wi-Fi / Bluetooth Module Optional Accessories Floor Mount (Landscape only) FMC-03+LMK-04, FMC-04+LMK-04, FMC-06 Ceiling Mount (Landscape only) CMP-01+LMK-01 Ceiling Mount (Landscape only) CMP-01+LMK-01 CMP-01+LMK-01 Power Cord, HDMI Cable, USB Cable, Remote Control, Batteries, Quick Start Guide, Touch Pen, Wall Mount, Wi-Fi / Bluetooth Module FMC-03+LMK-04, FMC-04+LMK-04, FMC-06 FMC-03+LMK-04, FMC-04+LMK-04, FMC-06 CMP-01+LMK-01 CMP-01+LMK-01 CMP-01+LMK-01 CMP-01+LMK-01 | Packaging (W x H x D) Weight Product w/o Base | 1656.0 x 1050.0 x 204.0 mm (65.2" x 41.3" x 8.0") 39.0 kg (86.0 lb) | 50.6 kg (111.6 lb) |
| Supplied Power Cord, HDMI Cable, USB Cable, Remote Control, Batteries, Quick Start Guide, Touch Pen, Wall Mount, Wi-Fi / Bluetooth Module Optional Accessories Floor Mount (Landscape only) FMC-03+LMK-04, FMC-04+LMK-04, FMC-06 Ceiling Mount (Landscape only) CMP-01+LMK-01 CMP-01+LMK-01 Power Cord, HDMI Cable, USB Cable, Remote Control, Batteries, Quick Start Guide, Touch Pen, Wall Mount, Wi-Fi / Bluetooth Module FMC-03+LMK-04, FMC-04+LMK-04, FMC-06 FMC-03+LMK-04, FMC-04+LMK-04, FMC-06 | Packaging (W x H x D) Weight Product w/o Base Packaging | 1656.0 x 1050.0 x 204.0 mm (65.2" x 41.3" x 8.0") 39.0 kg (86.0 lb) | 50.6 kg (111.6 lb) |
| Quick Start Guide, Touch Pen, Wall Mount, Wi-Fi / Bluetooth Module Optional Accessories Floor Mount (Landscape only) FMC-03+LMK-04, FMC-04+LMK-04, FMC-06 Ceiling Mount (Landscape only) CMP-01+LMK-01 | Packaging (W x H x D) Weight Product w/o Base Packaging Regulation Approval | 1656.0 x 1050.0 x 204.0 mm (65.2" x 41.3" x 8.0") 39.0 kg (86.0 lb) 55.7 kg (122.8 lb) | 50.6 kg (111.6 lb) 72.9 kg (160.7 lb) |
| Optional Accessories Floor Mount (Landscape only) FMC-03+LMK-04, FMC-04+LMK-04, FMC-06 FMC-03+LMK-04, FMC-04+LMK-04, FMC-06 FMC-03+LMK-04, FMC-04+LMK-04, FMC-06 Ceiling Mount (Landscape only) CMP-01+LMK-01 - | Packaging (W x H x D) Weight Product w/o Base Packaging Regulation Approval Certifications & Compliance | 1656.0 x 1050.0 x 204.0 mm (65.2" x 41.3" x 8.0") 39.0 kg (86.0 lb) 55.7 kg (122.8 lb) | 50.6 kg (111.6 lb) 72.9 kg (160.7 lb) |
| Floor Mount (Landscape only) FMC-03+LMK-04, FMC-04+LMK-04, FMC-06 FMC-03+LMK-04, FMC-04+LMK-04, FMC-06 Ceiling Mount (Landscape only) CMP-01+LMK-01 - | Packaging (W x H x D) Weight Product w/o Base Packaging Regulation Approval Certifications & Compliance Accessories | 1656.0 x 1050.0 x 204.0 mm (65.2" x 41.3" x 8.0") 39.0 kg (86.0 lb) 55.7 kg (122.8 lb) CE, LVD, FCC, WEEE, REACH, RoHS, BSMI Power Cord, HDMI Cable, USB Cable, Remote Control, Batteries, | 50.6 kg (111.6 lb) 72.9 kg (160.7 lb) CE, LVD, FCC, WEEE, REACH, RoHS, BSMI Power Cord, HDMI Cable, USB Cable, Remote Control, Batteries, |
| Ceiling Mount (Landscape only) CMP-01+LMK-01 - | Packaging (W x H x D) Weight Product w/o Base Packaging Regulation Approval Certifications & Compliance Accessories Supplied | 1656.0 x 1050.0 x 204.0 mm (65.2" x 41.3" x 8.0") 39.0 kg (86.0 lb) 55.7 kg (122.8 lb) CE, LVD, FCC, WEEE, REACH, RoHS, BSMI Power Cord, HDMI Cable, USB Cable, Remote Control, Batteries, | 50.6 kg (111.6 lb) 72.9 kg (160.7 lb) CE, LVD, FCC, WEEE, REACH, RoHS, BSMI Power Cord, HDMI Cable, USB Cable, Remote Control, Batteries, |
| | Packaging (W x H x D) Weight Product w/o Base Packaging Regulation Approval Pactifications & Compliance Accessories Supplied Optional Accessories | 1656.0 x 1050.0 x 204.0 mm (65.2" x 41.3" x 8.0") 39.0 kg (86.0 lb) 55.7 kg (122.8 lb) CE, LVD, FCC, WEEE, REACH, RoHS, BSMI Power Cord, HDMI Cable, USB Cable, Remote Control, Batteries, Quick Start Guide, Touch Pen, Wall Mount, Wi-Fi / Bluetooth Module | 50.6 kg (111.6 lb) 72.9 kg (160.7 lb) CE, LVD, FCC, WEEE, REACH, RoHS, BSMI Power Cord, HDMI Cable, USB Cable, Remote Control, Batteries, Quick Start Guide, Touch Pen, Wall Mount, Wi-Fi / Bluetooth Module |
| | Packaging (W x H x D) Weight Product w/o Base Packaging Regulation Approval Certifications & Compliance Accessories Supplied Optional Accessories Cloor Mount (Landscape only) | 1656.0 x 1050.0 x 204.0 mm (65.2" x 41.3" x 8.0") 39.0 kg (86.0 lb) 55.7 kg (122.8 lb) CE, LVD, FCC, WEEE, REACH, RoHS, BSMI Power Cord, HDMI Cable, USB Cable, Remote Control, Batteries, Quick Start Guide, Touch Pen, Wall Mount, Wi-Fi / Bluetooth Module FMC-03+LMK-04, FMC-04+LMK-04, FMC-06 | 50.6 kg (111.6 lb) 72.9 kg (160.7 lb) CE, LVD, FCC, WEEE, REACH, RoHS, BSMI Power Cord, HDMI Cable, USB Cable, Remote Control, Batteries, Quick Start Guide, Touch Pen, Wall Mount, Wi-Fi / Bluetooth Module |
| Stand STD-08 - | Packaging (W x H x D) Weight Product w/o Base Packaging Regulation Approval Certifications & Compliance Accessories Supplied Optional Accessories Cloor Mount (Landscape only) Ceiling Mount (Landscape only) | 1656.0 x 1050.0 x 204.0 mm (65.2" x 41.3" x 8.0") 39.0 kg (86.0 lb) 55.7 kg (122.8 lb) CE, LVD, FCC, WEEE, REACH, RoHS, BSMI Power Cord, HDMI Cable, USB Cable, Remote Control, Batteries, Quick Start Guide, Touch Pen, Wall Mount, Wi-Fi / Bluetooth Module FMC-03+LMK-04, FMC-04+LMK-04, FMC-06 CMP-01+LMK-01 | 50.6 kg (111.6 lb) 72.9 kg (160.7 lb) CE, LVD, FCC, WEEE, REACH, RoHS, BSMI Power Cord, HDMI Cable, USB Cable, Remote Control, Batteries, Quick Start Guide, Touch Pen, Wall Mount, Wi-Fi / Bluetooth Module FMC-03+LMK-04, FMC-04+LMK-04, FMC-06 |



| Specifications | IFP-8602 |
|--|---|
| Panel | |
| Panel Type | LED-Backlit TFT LCD (IPS Technology) |
| Panel Size | 85.6" |
| Max. Resolution Pixel Pitch | UHD 3840 x 2160 0.494 mm |
| Brightness | 350 cd/m ² |
| Contrast Ratio | 1200:1 |
| Viewing Angle (H/V) | 178°/178° |
| Display Colour | 1.07B |
| Response Time | 5 ms |
| Surface Treatment | Anti-Glare treatment (Haze 28%), 2H Hard coating |
| Frequency | The olde teather (tabe 2019), 211 late totally |
| Frequency (H) | 30 kHz-80 kHz |
| Frequency (V) | 50 Hz-76 Hz |
| Signal Input | |
| HDMI | 2.0 x 3 |
| VGA | 15-Pin D-Sub x 1 |
| Signal Output | |
| HDMI | 2.0 x 1 |
| External Control | |
| RS232 In | 9-Pin D-Sub |
| LAN | RJ45 x 1 |
| Embedded Player | |
| os | Android 8.0 |
| CPU | Dual core A73+Dual core A53 |
| Memory | 3 GB |
| Storage | 16 GB |
| Other Connectivity | |
| USB | 2.0 x 3 / 3.0 x 3 |
| Audio | |
| Audio In | Stereo Audio Jack (3.5 mm) |
| Audio Out | Stereo Audio Jack (3.5 mm), S/PDIF |
| Internal Speakers | 16W x 2 |
| Touch Screen | |
| Panel Interface | USB 2.0 x 2 (Type-B) |
| Technology | Infrared Touch Frame |
| Positional Accuracy | ±1.5 mm |
| | |
| Single Touch Plug & Play | Windows 2000/XP/Vista/CE 6.0, macOS |
| Multi-touch Plug & Play | Windows 7/8/10/11, Android/Linux (kernel version 3.5+), Chrome OS (39 or above) |
| Multi-touch Plug & Play Multi-touch Support by Driver | |
| Multi-touch Plug & Play Multi-touch Support by Driver Power | Windows 7/8/10/11, Android/Linux (kernel version 3.5+), Chrome OS (39 or above) macOS (supported by UPDD driver) |
| Multi-touch Plug & Play Multi-touch Support by Driver Power Power Supply | Windows 7/8/10/11, Android/Linux (kernel version 3.5+), Chrome OS (39 or above) macOS (supported by UPDD driver) Internal |
| Multi-touch Plug & Play Multi-touch Support by Driver Power Power Supply Power Requirements | Windows 7/8/10/11, Android/Linux (kernel version 3.5+), Chrome OS (39 or above) macOS (supported by UPDD driver) Internal AC 100-240V, 50/60 Hz |
| Multi-touch Plug & Play Multi-touch Support by Driver Power Power Supply Power Requirements On Mode | Windows 7/8/10/11, Android/Linux (kernel version 3.5+), Chrome OS (39 or above) macOS (supported by UPDD driver) Internal AC 100-240V, 50/60 Hz 294W |
| Multi-touch Plug & Play Multi-touch Support by Driver Power Power Supply Power Requirements On Mode Standby Mode | Windows 7/8/10/11, Android/Linux (kernel version 3.5+), Chrome OS (39 or above) macOS (supported by UPDD driver) Internal AC 100-240V, 50/60 Hz 294W < 0.5W |
| Multi-touch Plug & Play Multi-touch Support by Driver Power Power Supply Power Requirements On Mode Standby Mode Off Mode | Windows 7/8/10/11, Android/Linux (kernel version 3.5+), Chrome OS (39 or above) macOS (supported by UPDD driver) Internal AC 100-240V, 50/60 Hz 294W |
| Multi-touch Plug & Play Multi-touch Support by Driver Power Power Supply Power Requirements On Mode Standby Mode Off Mode Glass | Windows 7/8/10/11, Android/Linux (kernel version 3.5+), Chrome OS (39 or above) macOS (supported by UPDD driver) Internal AC 100-240V, 50/60 Hz 294W < 0.5W < 0.3W |
| Multi-touch Plug & Play Multi-touch Support by Driver Power Power Supply Power Requirements On Mode Standby Mode Off Mode Glass Thickness | Windows 7/8/10/11, Android/Linux (kernel version 3.5+), Chrome OS (39 or above) macOS (supported by UPDD driver) Internal AC 100-240V, 50/60 Hz 294W < 0.5W < 0.3W 4.0 mm (0.16") |
| Multi-touch Plug & Play Multi-touch Support by Driver Power Power Supply Power Requirements On Mode Standby Mode Off Mode Glass Thickness Reflection Rate | Windows 7/8/10/11, Android/Linux (kernel version 3.5+), Chrome OS (39 or above) macOS (supported by UPDD driver) Internal AC 100-240V, 50/60 Hz 294W < 0.5W < 0.3W 4.0 mm (0.16") < 10% |
| Multi-touch Plug & Play Multi-touch Support by Driver Power Power Supply Power Requirements On Mode Standby Mode Off Mode Glass Thickness Reflection Rate Transmission Rate | Windows 7/8/10/11, Android/Linux (kernel version 3.5+), Chrome OS (39 or above) macOS (supported by UPDD driver) Internal AC 100-240V, 50/60 Hz 294W < 0.5W < 0.3W 4.0 mm (0.16") < 10% ≥ 88% |
| Multi-touch Plug & Play Multi-touch Support by Driver Power Power Supply Power Requirements On Mode Standby Mode Off Mode Glass Thickness Reflection Rate Transmission Rate Hardness | Windows 7/8/10/11, Android/Linux (kernel version 3.5+), Chrome OS (39 or above) macOS (supported by UPDD driver) Internal AC 100-240V, 50/60 Hz 294W < 0.5W < 0.3W 4.0 mm (0.16") < 10% ≥ 88% ≥ 8H |
| Multi-touch Plug & Play Multi-touch Support by Driver Power Power Supply Power Requirements On Mode Standby Mode Off Mode Glass Thickness Reflection Rate Transmission Rate Hardness Gloss | Windows 7/8/10/11, Android/Linux (kernel version 3.5+), Chrome OS (39 or above) macOS (supported by UPDD driver) Internal AC 100-240V, 50/60 Hz 294W < 0.5W < 0.3W 4.0 mm (0.16") < 10% ≥ 88% |
| Multi-touch Plug & Play Multi-touch Support by Driver Power Power Supply Power Requirements On Mode Standby Mode Off Mode Glass Thickness Reflection Rate Transmission Rate Hardness Gloss Operating Conditions | Windows 7/8/10/11, Android/Linux (kernel version 3.5+), Chrome OS (39 or above) macOS (supported by UPDD driver) Internal AC 100-240V, 50/60 Hz 294W < 0.5W < 0.3W 4.0 mm (0.16") < 10% ≥ 88% ≥ 8H 75±5 GU |
| Multi-touch Plug & Play Multi-touch Support by Driver Power Power Supply Power Requirements On Mode Standby Mode Off Mode Glass Thickness Reflection Rate Transmission Rate Hardness Gloss Operating Conditions Temperature | Windows 7/8/10/11, Android/Linux (kernel version 3.5+), Chrome OS (39 or above) macOS (supported by UPDD driver) Internal AC 100-240V, 50/60 Hz 294W < 0.5W < 0.3W 4.0 mm (0.16") < 10% ≥ 88% ≥ 8H 75±5 GU 0°C-40°C (32°F-104°F) |
| Multi-touch Plug & Play Multi-touch Support by Driver Power Power Supply Power Requirements On Mode Standby Mode Off Mode Glass Thickness Reflection Rate Transmission Rate Hardness Gloss Operating Conditions Temperature Humidity | Windows 7/8/10/11, Android/Linux (kernel version 3.5+), Chrome OS (39 or above) macOS (supported by UPDD driver) Internal AC 100-240V, 50/60 Hz 294W < 0.5W < 0.3W 4.0 mm (0.16") < 10% ≥ 88% ≥ 8H 75±5 GU |
| Multi-touch Plug & Play Multi-touch Support by Driver Power Power Supply Power Requirements On Mode Standby Mode Off Mode Glass Thickness Reflection Rate Transmission Rate Hardness Gloss Operating Conditions Temperature | Windows 7/8/10/11, Android/Linux (kernel version 3.5+), Chrome OS (39 or above) macOS (supported by UPDD driver) Internal AC 100-240V, 50/60 Hz 294W < 0.5W < 0.3W 4.0 mm (0.16") < 10% ≥ 88% ≥ 8H 75±5 GU 0°C-40°C (32°F-104°F) 10%-90% (non-condensing) |
| Multi-touch Plug & Play Multi-touch Support by Driver Power Power Supply Power Requirements On Mode Standby Mode Off Mode Glass Thickness Reflection Rate Transmission Rate Hardness Gloss Operating Conditions Temperature Humidity Storage Conditions Temperature | Windows 7/8/10/11, Android/Linux (kernel version 3.5+), Chrome OS (39 or above) macOS (supported by UPDD driver) Internal AC 100-240V, 50/60 Hz 294W < 0.5W < 0.3W 4.0 mm (0.16") < 10% ≥ 88% ≥ 8H 75±5 GU 0°C-40°C (32°F-104°F) 10%-90% (non-condensing) -20°C-60°C (-4°F-140°F) |
| Multi-touch Plug & Play Multi-touch Support by Driver Power Power Supply Power Requirements On Mode Standby Mode Off Mode Glass Thickness Reflection Rate Transmission Rate Hardness Gloss Operating Conditions Temperature Humidity Storage Conditions Temperature Humidity | Windows 7/8/10/11, Android/Linux (kernel version 3.5+), Chrome OS (39 or above) macOS (supported by UPDD driver) Internal AC 100-240V, 50/60 Hz 294W < 0.5W < 0.3W 4.0 mm (0.16") < 10% ≥ 88% ≥ 8H 75±5 GU 0°C-40°C (32°F-104°F) 10%-90% (non-condensing) |
| Multi-touch Plug & Play Multi-touch Support by Driver Power Power Supply Power Requirements On Mode Standby Mode Off Mode Glass Thickness Reflection Rate Transmission Rate Hardness Gloss Operating Conditions Temperature Humidity Storage Conditions Temperature | Windows 7/8/10/11, Android/Linux (kernel version 3.5+), Chrome OS (39 or above) macOS (supported by UPDD driver) Internal AC 100-240V, 50/60 Hz 294W < 0.5W < 0.3W 4.0 mm (0.16") < 10% ≥ 88% ≥ 8H 75±5 GU 0°C-40°C (32°F-104°F) 10%-90% (non-condensing) -20°C-60°C (-4°F-140°F) |
| Multi-touch Plug & Play Multi-touch Support by Driver Power Power Supply Power Requirements On Mode Standby Mode Off Mode Glass Thickness Reflection Rate Transmission Rate Hardness Gloss Operating Conditions Temperature Humidity Storage Conditions Temperature Humidity Mounting | Windows 7/8/10/11, Android/Linux (kernel version 3.5+), Chrome OS (39 or above) macOS (supported by UPDD driver) Internal AC 100-240V, 50/60 Hz 294W < 0.5W < 0.3W 4.0 mm (0.16") < 10% ≥ 88% ≥ 8H 75±5 GU 0°C-40°C (32°F-104°F) 10%-90% (non-condensing) -20°C-60°C (-4°F-140°F) 10%-90% (non-condensing) |
| Multi-touch Plug & Play Multi-touch Support by Driver Power Power Supply Power Requirements On Mode Standby Mode Off Mode Glass Thickness Reflection Rate Transmission Rate Hardness Gloss Operating Conditions Temperature Humidity Storage Conditions Temperature Humidity Mounting VESA FPMPMI | Windows 7/8/10/11, Android/Linux (kernel version 3.5+), Chrome OS (39 or above) macOS (supported by UPDD driver) Internal AC 100-240V, 50/60 Hz 294W < 0.5W < 0.3W 4.0 mm (0.16") < 10% ≥ 88% ≥ 8H 75±5 GU 0°C-40°C (32°F-104°F) 10%-90% (non-condensing) -20°C-60°C (-4°F-140°F) 10%-90% (non-condensing) |
| Multi-touch Plug & Play Multi-touch Support by Driver Power Power Supply Power Requirements On Mode Standby Mode Off Mode Glass Thickness Reflection Rate Transmission Rate Hardness Gloss Operating Conditions Temperature Humidity Storage Conditions Temperature Humidity Mounting VESA FPMPMI Dimensions | Windows 7/8/10/11, Android/Linux (kernel version 3.5+), Chrome OS (39 or above) macOS (supported by UPDD driver) Internal AC 100-240V, 50/60 Hz 294W < 0.5W < 0.3W 4.0 mm (0.16") < 10% ≥ 88% ≥ 8H 75±5 GU 0°C-40°C (32°F-104°F) 10%-90% (non-condensing) -20°C-60°C (-4°F-140°F) 10%-90% (non-condensing) Yes (800 x 600 mm) |
| Multi-touch Plug & Play Multi-touch Support by Driver Power Power Supply Power Requirements On Mode Standby Mode Off Mode Glass Thickness Reflection Rate Transmission Rate Hardness Gloss Operating Conditions Temperature Humidity Storage Conditions Temperature Humidity Mounting VESA FPMPMI Dimensions Product w/o Base (W x H x D) | Windows 7/8/10/11, Android/Linux (kernel version 3.5+), Chrome OS (39 or above) macOS (supported by UPDD driver) Internal AC 100-240V, 50/60 Hz 294W < 0.5W < 0.3W 4.0 mm (0.16") < 10% ≥ 88% ≥ 8H 75±5 GU 0°C-40°C (32°F-104°F) 10%-90% (non-condensing) -20°C-60°C (-4°F-140°F) 10%-90%(non-condensing) Yes (800 x 600 mm) 1957.2 x 1160.0 x 86.0 mm (77.1" x 45.6" x 3.4") |
| Multi-touch Plug & Play Multi-touch Support by Driver Power Power Supply Power Requirements On Mode Standby Mode Off Mode Glass Thickness Reflection Rate Transmission Rate Hardness Gloss Operating Conditions Temperature Humidity Storage Conditions Temperature Humidity Mounting VESA FPMPMI Dimensions Product w/o Base (W x H x D) Packaging (W x H x D) | Windows 7/8/10/11, Android/Linux (kernel version 3.5+), Chrome OS (39 or above) macOS (supported by UPDD driver) Internal AC 100-240V, 50/60 Hz 294W < 0.5W < 0.3W 4.0 mm (0.16") < 10% ≥ 88% ≥ 8H 75±5 GU 0°C-40°C (32°F-104°F) 10%-90% (non-condensing) -20°C-60°C (-4°F-140°F) 10%-90%(non-condensing) Yes (800 x 600 mm) 1957.2 x 1160.0 x 86.0 mm (77.1" x 45.6" x 3.4") |
| Multi-touch Plug & Play Multi-touch Support by Driver Power Power Supply Power Requirements On Mode Standby Mode Off Mode Glass Thickness Reflection Rate Transmission Rate Hardness Gloss Operating Conditions Temperature Humidity Storage Conditions Temperature Humidity Mounting VESA FPMPMI Dimensions Product w/o Base (W x H x D) Packaging (W x H x D) Weight | Windows 7/8/10/11, Android/Linux (kernel version 3.5+), Chrome OS (39 or above) macOS (supported by UPDD driver) Internal AC 100-240V, 50/60 Hz 294W < 0.5W < 0.3W 4.0 mm (0.16") < 10% ≥ 88% ≥ 8H 75±5 GU 0°C-40°C (32°F-104°F) 10%-90% (non-condensing) -20°C-60°C (-4°F-140°F) 10%-90%(non-condensing) Yes (800 x 600 mm) 1957.2 x 1160.0 x 86.0 mm (77.1" x 45.6" x 3.4") 2211.0 x 1370.0 x 280.0 mm (87.1" x 53.9" x 11.0") |
| Multi-touch Plug & Play Multi-touch Support by Driver Power Power Supply Power Requirements On Mode Standby Mode Off Mode Glass Thickness Reflection Rate Transmission Rate Hardness Gloss Operating Conditions Temperature Humidity Storage Conditions Temperature Humidity Mounting VESA FPMPMI Dimensions Product w/o Base (W x H x D) Packaging (W x H x D) Weight Product w/o Base | Windows 7/8/10/11, Android/Linux (kernel version 3.5+), Chrome OS (39 or above) macOS (supported by UPDD driver) Internal AC 100-240V, 50/60 Hz 294W < 0.5W < 0.3W 4.0 mm (0.16") < 10% ≥ 88% ≥ 8H 75±5 GU 0°C-40°C (32°F-104°F) 10%-90% (non-condensing) -20°C-60°C (-4°F-140°F) 10%-90%(non-condensing) Yes (800 x 600 mm) 1957.2 x 1160.0 x 86.0 mm (77.1" x 45.6" x 3.4") 2211.0 x 1370.0 x 280.0 mm (87.1" x 53.9" x 11.0") 66.0kg (145.5 lb) |
| Multi-touch Plug & Play Multi-touch Support by Driver Power Power Supply Power Requirements On Mode Standby Mode Off Mode Glass Thickness Reflection Rate Transmission Rate Hardness Gloss Operating Conditions Temperature Humidity Storage Conditions Temperature Humidity Mounting VESA FPMPMI Dimensions Product w/o Base (W x H x D) Packaging (W x H x D) Weight Product w/o Base Packaging | Windows 7/8/10/11, Android/Linux (kernel version 3.5+), Chrome OS (39 or above) macOS (supported by UPDD driver) Internal AC 100-240V, 50/60 Hz 294W < 0.5W < 0.3W 4.0 mm (0.16") < 10% ≥ 88% ≥ 8H 75±5 GU 0°C-40°C (32°F-104°F) 10%-90% (non-condensing) -20°C-60°C (-4°F-140°F) 10%-90%(non-condensing) Yes (800 x 600 mm) 1957.2 x 1160.0 x 86.0 mm (77.1" x 45.6" x 3.4") 2211.0 x 1370.0 x 280.0 mm (87.1" x 53.9" x 11.0") 66.0kg (145.5 lb) |
| Multi-touch Plug & Play Multi-touch Support by Driver Power Power Supply Power Requirements On Mode Standby Mode Off Mode Glass Thickness Reflection Rate Transmission Rate Hardness Gloss Operating Conditions Temperature Humidity Storage Conditions Temperature Humidity Mounting VESA FPMPMI Dimensions Product w/o Base (W x H x D) Packaging (W x H x D) Weight Product w/o Base Packaging Regulation Approval | Windows 7/8/10/11, Android/Linux (kernel version 3.5+), Chrome OS (39 or above) macOS (supported by UPDD driver) Internal AC 100-240V, 50/60 Hz 294W < 0.5W < 0.3W 4.0 mm (0.16") < 10% ≥ 88% ≥ 8H 75±5 GU 0°C-40°C (32°F-104°F) 10%-90% (non-condensing) -20°C-60°C (-4°F-140°F) 10%-90%(non-condensing) Yes (800 x 600 mm) 1957.2 x 1160.0 x 86.0 mm (77.1" x 45.6" x 3.4") 2211.0 x 1370.0 x 280.0 mm (87.1" x 53.9" x 11.0") 66.0kg (145.5 lb) 98.8kg (217.8 lb) |
| Multi-touch Plug & Play Multi-touch Support by Driver Power Power Supply Power Requirements On Mode Standby Mode Off Mode Glass Thickness Reflection Rate Transmission Rate Hardness Gloss Operating Conditions Temperature Humidity Storage Conditions Temperature Humidity Mounting VESA FPMPMI Dimensions Product w/o Base (W x H x D) Packaging (W x H x D) Weight Product w/o Base Packaging Regulation Approval Certifications & Compliance | Windows 7/8/10/11, Android/Linux (kernel version 3.5+), Chrome OS (39 or above) macOS (supported by UPDD driver) Internal AC 100-240V, 50/60 Hz 294W < 0.5W < 0.3W 4.0 mm (0.16") < 10% ≥ 88% ≥ 8H 75±5 GU 0°C-40°C (32°F-104°F) 10%-90% (non-condensing) -20°C-60°C (4°F-140°F) 10%-90%(non-condensing) Yes (800 x 600 mm) 1957.2 x 1160.0 x 86.0 mm (77.1" x 45.6" x 3.4") 2211.0 x 1370.0 x 280.0 mm (87.1" x 53.9" x 11.0") 66.0kg (145.5 lb) 98.8kg (217.8 lb) CE, LVD, FCC, WEEE, REACH, RoHS |
| Multi-touch Plug & Play Multi-touch Support by Driver Power Power Supply Power Requirements On Mode Standby Mode Off Mode Glass Thickness Reflection Rate Transmission Rate Hardness Gloss Operating Conditions Temperature Humidity Storage Conditions Temperature Humidity Mounting VESA FPMPMI Dimensions Product w/o Base (W x H x D) Packaging (W x H x D) Weight Product w/o Base Packaging Regulation Approval Certifications & Compliance Accessories Supplied | Windows 7/8/10/11, Android/Linux (kernel version 3.5+), Chrome OS (39 or above) macOS (supported by UPDD driver) Internal AC 100-240V, 50/60 Hz 294W < 0.5W < 0.3W 4.0 mm (0.16") < 10% |
| Multi-touch Plug & Play Multi-touch Support by Driver Power Power Supply Power Requirements On Mode Standby Mode Off Mode Glass Thickness Reflection Rate Transmission Rate Hardness Gloss Operating Conditions Temperature Humidity Storage Conditions Temperature Humidity Mounting VESA FPMPMI Dimensions Product w/o Base (W x H x D) Packaging (W x H x D) Weight Product w/o Base Packaging Regulation Approval Certifications & Compliance Accessories | Windows 7/8/10/11, Android/Linux (kernel version 3.5+), Chrome OS (39 or above) macOS (supported by UPDD driver) Internal AC 100-240V, 50/60 Hz 294W < 0.5W < 0.3W 4.0 mm (0.16") < 10% ≥ 88% ≥ 8H 75±5 GU 0°C-40°C (32°F-104°F) 10%-90% (non-condensing) -20°C-60°C (4°F-140°F) 10%-90%(non-condensing) Yes (800 x 600 mm) 1957.2 x 1160.0 x 86.0 mm (77.1" x 45.6" x 3.4") 2211.0 x 1370.0 x 280.0 mm (87.1" x 53.9" x 11.0") 66.0kg (145.5 lb) 98.8kg (217.8 lb) CE, LVD, FCC, WEEE, REACH, RoHS |

