

FlipX Standard Series

INDOOR SECURITY



FLX-S-ST

PIR

FLX-S-DT

DUAL-TECHNOLOGY
(PIR and MW)

Grade 2 indoor motion detector with flexible lens for residential and light commercial security.


- 12m (40ft.) 85 degree Wide
- 18m (60ft.) Narrow




Flexible lens: One lens, two options

Selectable wide and narrow detection with one sensor. Simply switch the lens to change the shape of the detection area best suited to the installation site.

Wide Detection Area

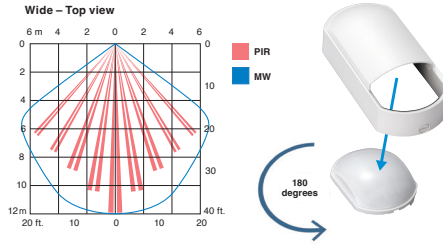

Narrow and Long Detection Area



FLX-S-ST model only

Human-catch element and excellent pet immunity



The new element size has been specifically designed to create human-size detection areas and optimise detection sensitivity.



Conventional element




New original element

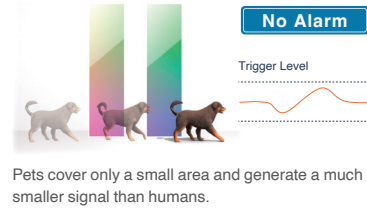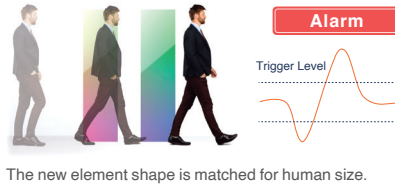

In addition to the human catch element, FlipX standard models have excellent tolerance to identify temperature changes from small animals and avoid false alarms.

Refined spherical lens and SMDA logic for high-detection performance

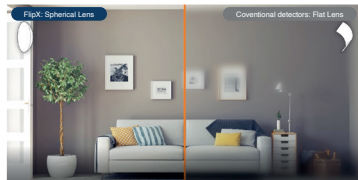

OPTEX's indoor sensors are equipped with a specially designed spherical lens which allows for very sharp focus and high-performance detection.

No detection



Detection



OPTEX's SMDA algorithm can differentiate between common causes of nuisance alarms, such as shadows and bright lights, to focus the detection on genuine intrusions.

Specifications

Part name	FLX-S-ST	FLX-S-DT
Model name	Standard	
Mounting height	2.0 to 3.0 m (6'7" to 9'8")	
Coverage	Wide: 12 m (40') 85° Narrow: 18 m (60') 5°	Wide: 12 m (40') 85° (PIR only for Narrow setting)
Sensitivity	1.6°C (2.9°F) at 0.6 m/s (2'/s); 2.4 m (8') mounting height	
Alarm period	2.0 ± 0.5 s	
Warm-up period	Approx. 60 s (LED blinks)	
LED indicator	Green: [1] Warm-up [2] Alarm	
Power input	9.5 to 16 V DC	
Current draw	12 mA max. at 12 V DC	16 mA max. at 12 V DC
Relay output	Alarm	N.C. 24 V DC 0.1 A max.
	Tamper	N.C. 24 V DC 0.1 A max. (Open when the cover is removed)
Remote LED	-	✓
Operation temperature	-20°C to +50°C (-4°F to +122°F)	
Temperature compensation	Digital	
Relative humidity	95% RH max.	
Dimension	H: 130 mm x W: 62 mm x D: 56 mm	
Weight	120 g (4.20 oz)	135 g (4.73 oz)

- Specifications and designs are subject to change without prior notice.
- These units are designed to detect an intruder and activate an alarm control panel. Being only a part of a complete system, we cannot accept responsibility for any damages or other consequences resulting from an intrusion.

Ease of installation

Easily viewable LED indicator

Re-designed LED indicator has been selected for clearer viewing at distance.




Options

- Wall or Ceiling mount selectable
- Horizontally: -1-45°
- Vertically: -5 to 20° downward



Dimensions



Web based manual
for Standard model



OPTEX EMEA Security Headquarters
OPTEX EUROPE LTD (UK and Africa)
OPTEX Security B.V. (EU)
OPTEX Dubai Branch (Middle East)
W: www.optex-europe.com
E: marketing@optex-europe.com

OPTEX SECURITY SAS
(France, French speaking North
and West African countries)
W: www.optex-europe.com/fr
E: contact@optex-security.com

OPTEX SECURITY Sp.z.o.o.
(Eastern Europe, Turkey)
W: www.optex-europe.com/pl
E: optex@optex.com.pl