

## SC-2202 22" VIDEO SURVEILLANCE MONITOR WITH BNC





- 1920 x 1080 resolution and wide viewing angle
- HDMI, VGA, Composite (BNC) and dual 2W speakers
- Anti-Burn-in<sup>™</sup> technology prevents image ghosting
- Image Enhancer: 3D Comb Filter / Deinterlace / Noise Reduction
- BNC passive loop-through output port
- Black-level adjustment for presenting more details in dark images
- Selectable gamma curves optimise the overall image quality
- CCTV picture mode for maximum image detail and clarity in low light footage
- Designed for continuous 24/7 operation
- · Flicker-free display technology reduces eye discomfort












The SC-2202 is a 22-inch security monitor specifically designed for surveillance operators - especially those with a 24/7 operating for efficient video monitoring. The SC-2202 provides value-added video enhancement controls that help create detailed images for low-light footage. Its optional monitor mounting solutions support single or multiple monitor setups. In terms of cost-to-performance, this model is the solution for productivity in modern operator workstations.

## **TECHNICAL DRAWING**

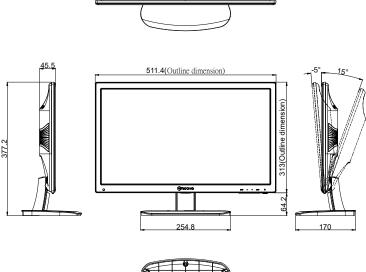







## **SPECIFICATIONS**

Panel		

Panel	
Panel Type	LED-Backlit TFT LCD
Panel Size	21.5"
Max. Resolution	FHD 1920 x 1080
Pixel Pitch	0.248 mm
Brightness	250 cd/m <sup>2</sup>
Contrast Ratio	20,000,000:1 (DCR)
Viewing Angle (H/V)	170°/160°
Display Colour	16.7M
Response Time	3 ms
Frequency	
Frequency (H)	30 kHz-85 kHz
Frequency (V)	48 Hz-75 Hz
Signal Input	
НДМІ	1.4 x 1
VGA	15-Pin D-Sub x 1
Composite	BNC x 1
Signal Output	Shexi
Composite	BNC x 1
Audio	5.10 // 1
Audio In	Stereo Audio Jack (3.5 mm)
Internal Speakers	2W x 2
Power	2W X Z
	latera al
Power Supply	Internal
Power Requirements	AC 100-240V, 50/60 Hz
On Mode	16W (On)
Standby Mode	< 0.5W
Off Mode	< 0.3W
Operating Conditions	FOO 0500 (4405 0505)
Temperature Humidity	5°C-35°C (41°F-95°F)
, and the second	20%-85% (non-condensing)
Storage Conditions	0000 0000 / 105 11005
Temperature	-20°C-60°C (-4°F-140°F)
Humidity	10%-90% (non-condensing)
Mounting	V (400 400 )
VESA FPMPMI	Yes (100 x 100 mm)
Stand	F0.1. 4F0
Tilt	-5° to 15°
Security	v.
Kensington Security Slot	Yes
Dimensions	
Product with Base (W x H x D)	511.4 x 377.2 x 170.0 mm (20.1" x 14.9" x 6.7")
Product w/o Base (W x H x D)	511.4 x 313.0 x 45.5 mm (20.1" x 12.3" x 1.8")
Packaging (W x H x D)	561.0 x 426.0 x 103.0 mm (22.1" x 16.8" x 4.1")
Weight	
Product w/o Base	2.9 kg (6.4 lb)
Product with Base	3.2 kg (7.1 lb)
Packaging	4.6 kg (10.1 lb)
Regulation Approval	
Certifications & Compliance	CE, LVD, WEEE, RoHS, REACH, EAC
Accessories	
Supplied	Power Cord, VGA Cable, Audio Cable, Quick Start Guide
Optional Accessories	
Ceiling Mount	CMP-01+WMK-03
Wall Mount	WMA-01, WMK-01, WMK-03, PMK-01
Desk mount	DMC-01, DMC-02D, DMS-01D, ES-02













