

EMC TEST REPORT

Report No.	:	N2102R-1190
Model and/or type referene	:	TNU-6322E
Test item description	:	2M 32x Network PTZ Camera
Trade Mark/Brand name	:	N/A
Additional model name	:	N/A
Manufacturer	:	Wonwoo Engineering Co.,Ltd
Test Device Serial No.	:	N/A
EMC Directive	:	Electromagnetic Compatibility Directive 2014/30/EU
Test Standards	:	EN 55032: 2015/+A11: 2020 EN 50130-4:2011 + A1: 2014 EN IEC 61000-3-2:2019 EN 61000-3-3:2013+A1:2019
Data of issue	:	February 25, 2021
Test result	:	Complied



2021.02.25

 Tested by YOO Byeongkook
 (+ signature) / Staff



2021.2.25

 Reviewed by OH Seungjun
 (+ signature) / Technical Manager

The results in this report apply only to the sample(s) tested.

It is not allowed to copy this report even partly without the allowance of the test laboratory.

This report is related to KS Q ISO/IEC 17025 and KOLAS.

>>TABLE OF CONTENTS<<

1. General information	3
1.1 Test Performed	3
2. Information about test item.....	4
2.1 Applicant information	4
2.2 Equipment Under Test (EUT) description.....	4
2.3 Test conditions	5
2.4 Ancillary Equipment.....	5
2.5 Variant Model	5
2.6 Cable List.....	6
2.7 Block diagram of the EUT test.....	6
3. Test Report.....	7
3.1 Test Summary	7
3.1.1 Summary of EMI emission test results.....	7
3.1.2 Summary of EMS immunity test results.....	8
3.2 EMISSION.....	9
3.2.1 Requirements for radiated emissions	9
3.2.2 Requirements for radiated emissions from FM receivers	15
3.2.4 Requirements for conducted emissions from the AC mains power ports	19
3.2.5 Requirements for asymmetric mode conducted emissions	23
3.2.6 Requirements for conducted differential voltage emissions.....	28
3.2.7 Harmonic Current (AC power input port)	31
3.2.8 Voltage Variation and Flicking (AC power input port)	34
3.3 IMMUNITY	37
3.3.1 Electrostatic Discharge.....	37
3.3.2 RF Electromagnetic Field	40
3.3.3 Electrical Fast Transients common mode	41
3.3.4 Surge	42
3.3.5 RF current common mode.....	44
3.3.6 Voltage dips and interruptions.....	45
APPENDIX.....	46

1. General information

1.1 Test Performed

RRA Designation No.: KR0157

KOLAS Accreditation No. : KT511

Laboratory : **NTREE Co., Ltd.**

1st laboratory : 30,Pajangcheon-ro 44beon-gil,Jangan-gu, Suwon-si, Gyeonggi-do,

Address 16204, KOREA

Telephone : +82-31-893-1000

Facsimile : +82-31-893-0111

2nd laboratory : 228-60, Saneop-ro 155beon-gil, Gwonseon-gu, Suwon-si, Gyeonggi-do,

Address 16648, KOREA

Telephone : +82-31-893-0999

Facsimile : +82-31-297-0444

SITE MAP



2. Information about test item

2.1 Applicant information

Company name : Hanwha Techwin Co., Ltd
Address : 6, Pangyo-ro 319beon-gil, Bundang-gu, Seongnam-si, Gyeonggi-do, Republic of Korea
Telephone / Facsimile : +82-70-7147-5383 / +82-31-8018-3717
Contact name : UG Shin
Manufacturer : Wonwoo Engineering Co.,Ltd
Factory Address : 81, Magokjungang6-ro, Gangseo-gu, Seoul, Republic of Korea

2.2 Equipment Under Test (EUT) description

Classification of installation : A
Test item particulars : 2M 32x Network PTZ Camera
Trademark : N/A
Model and/or type reference : TNU-6322E
Additional model name : N/A
Serial number : N/A
Date (s) of performance of tests: : February 08, 2021 to February 16, 2021
Date of receipt of test item : February 08, 2021
EUT condition : Pre-productions, not damaged
Interface Ports : AC IN, IO, LAN
EUT Power Source : AC 24 V, 6 A
Internal clock frequency : Above 108 MHz
Firmware version : -
Note : N/A
Modification : N/A

2.3 Test conditions

Temp. / Humid. / Pressure	:	EMI : $+(20 \pm 1) ^\circ\text{C}$ / 48 - 50) % RH
	:	EMS: $+(20 \pm 2) ^\circ\text{C}$ / (41 - 49) % RH / (101.3 ± 0.3) kPa
Operating mode	:	Operating Mode
Test Voltage	:	AC 230 V / 50 Hz

2.4 Ancillary Equipment

Equipment	Model No.	Serial No.	Manufacturer
NOTEBOOK	NT300E4C	N/A	SAMSUNG
NOTEBOOK ADAPTER	CPA09-004A	N/A	N/A
ALARM	QL-Inductionbox	N/A	N/A
ALARM ADAPTER	SP1509A	N/A	Seung Bo Elecom Co.,Ltd.
ADAPTER	W&T-LP145W240600	N/A	W&T ELECTRONIC CO.,LTD


2.5 Variant Model

Model name	Remark
N/A	N/A

2.6 Cable List

Cable List				
Type	Length (m)	Shielding (Cable/backshell)	Remarks	
			From	to
EUT	1.5	NO / NO	AC IN	AC OUT
EUT	3.0	NO / NO	LAN	LAN
EUT	2.0	NO / NO	IO	IO
NOTEBOOK	1.2	NO / NO	DC IN	DC OUT
NOTEBOOK ADAPTER	1.5	NO / NO	AC IN	AC OUT
ALARM	1.2	NO / NO	DC IN	DC OUT
ALARM ADAPTER	-	- / -	AC IN	AC OUT
ADAPTER	1.5	NO / NO	AC IN	AC OUT

2.7 Block diagram of the EUT test

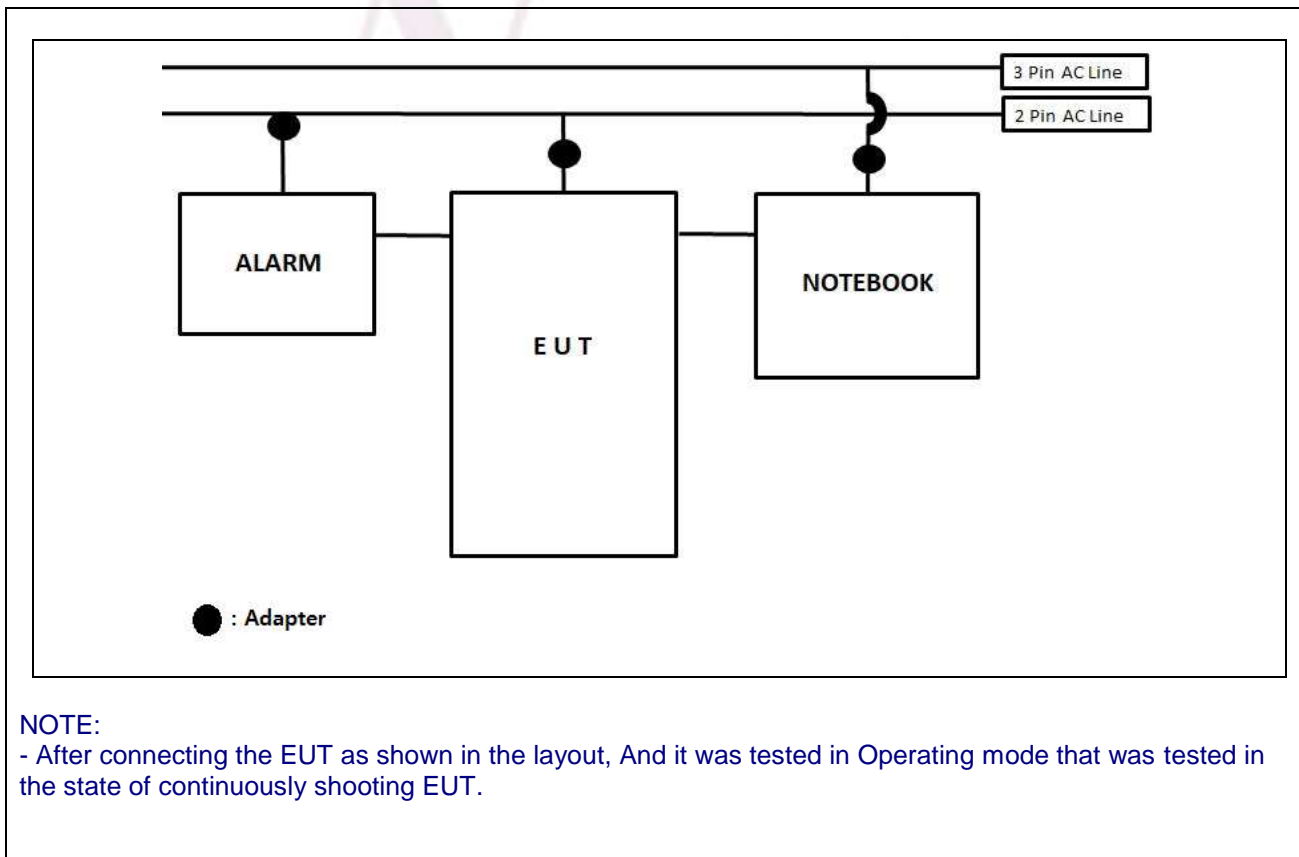

3. Test Report

3.1 Test Summary

3.1.1 Summary of EMI emission test results

Applied	Test items	Test method	Result
<input checked="" type="checkbox"/>	Requirements for radiated emissions	EN 55032: 2015/+A11: 2020	C
<input type="checkbox"/>	Requirements for radiated emissions from FM receivers	EN 55032: 2015/+A11: 2020	N/A
<input type="checkbox"/>	Requirements for outdoor units of home satellite receiving systems	EN 55032: 2015/+A11: 2020	N/A
<input checked="" type="checkbox"/>	Requirements for conducted emissions from the AC mains power ports	EN 55032: 2015/+A11: 2020	C
<input checked="" type="checkbox"/>	Requirements for asymmetric mode conducted emissions	EN 55032: 2015/+A11: 2020	C
<input type="checkbox"/>	Requirements for conducted differential voltage emissions	EN 55032: 2015/+A11: 2020	N/A
<input checked="" type="checkbox"/>	Harmonic Current emission	EN IEC 61000-3-2:2019	C
<input checked="" type="checkbox"/>	Voltage fluctuations and flicker	EN 61000-3-3:2013+A1:2019	C



3.1.2 Summary of EMS immunity test results

Applied	Test items	Test method	Result
EN 50130-4:2011+A1:2014			
☒	Electrostatic Discharge	EN 61000-4-2:2009	C
☒	RF Electromagnetic field (80 MHz to 2.7 GHz)	EN 61000-4-3:2006/A2:2010	C
☒	Fast Transients common mode	EN 61000-4-4:2004+A1 :2010	C
☒	Surge, line to line and line to ground	EN 61000-4-5:2006	C
☒	RF common mode (0.15 MHz to 100 MHz)	EN 61000-4-6:2009	C
☒	Voltage Dips and Interruptions	EN 61000-4-11:2004	C

Note 1: C=Complies N/A=Not Applicable F=Fail

Note 2: The highest internal source of an EUT is defined as the highest frequency generated or used within the EUT or on which the EUT operates or tunes.

If the highest frequency of the internal sources of the EUT is less than 108 MHz, the measurement shall only be made up to 1 GHz.

If the highest frequency of the internal sources of the EUT is between 108 MHz and 500 MHz, the measurement shall only be made up to 2 GHz.

If the highest frequency of the internal sources of the EUT is between 500 MHz and 1 GHz, the measurement shall only be made up to 5 GHz.

If the highest frequency of the internal sources of the EUT is above 1 GHz, the measurement shall be made up to 5 times the highest frequency or 6 GHz, whichever is less.
(The highest internal source of an EUT : ABOVE 108 MHz)

Note 3: The adapter used in the device under test is a peripheral device.

3.2 EMISSION

3.2.1 Requirements for radiated emissions

Definition:

The test assesses the ability of ancillary equipment to limit their internal noise from being radiated from the enclosure.

The tests were performed according to the NT-QP-014 procedure of the NTREE Co., Ltd.

Test method	: EN 55032: 2015/+A11: 2020
Measuring Distance	: Below 1 GHz - 10 m / Above 1 GHz - 3 m
Measurement Frequency range	: 30 MHz to 6 000 MHz
Measurement RBW	: Below 1 GHz – 120 kHz / Above 1 GHz – 1 MHz
Test mode	: Operating Mode
Result	: Complies

A sample calculation:

- C.F (correction factor)= Ant. Factor + Cable loss – (Amp. + 6 dB Att.) (Below 1 GHz)

- C.F (correction factor)= Ant. Factor + Cable loss – (Amp.) (Above 1 GHz)

- Emission Level= meter reading + C.F

- Sample calculation;

- Below 1 GHz

At Frequency: **38.245 000 MHz** Result = Reading + C.F. = **58.27+ (-29.9) = 28.37** [dBµV/m]

- Measurement Data's kept in NTREE Co., Ltd

- Above 1 GHz

At Frequency: **3196.944 444 MHz** Result = Reading + C.F. = **56.32+ (-2.6) = 53.72** [dBµV/m]

- Measurement Data's kept in NTREE Co., Ltd

Limit of below 1 GHz - CLASS A

Frequency Range (MHz)	Quasi-peak (dB(μV/m))	Distance (m)
30 to 230	40	10
230 to 1 000	47	

Limit of below 1 GHz - CLASS B

Frequency Range (MHz)	Quasi-peak (dB(μV/m))	Distance (m)
30 to 230	30	10
230 to 1 000	37	

Limit of above 1 GHz - CLASS A

Frequency Range (MHz)	Average (dBμV/m)	Peak (dBμV/m)	Distance (m)
1 000 to 3 000	56	76	3
3 000 to 6 000	60	80	
NOTE: The lower limit applies at the transition frequency.			

Limit of above 1 GHz - CLASS B

Frequency Range	Average (dBμV/m)	Peak (dBμV/m)	Distance (m)
1 000 to 3 000	50	70	3
3 000 to 6 000	54	74	
NOTE: The lower limit applies at the transition frequency.			

Used equipments – (Below 1 GHz)

Used	Equipment	Model name	Manufacturer	Serial No.	Next Cal.
<input checked="" type="checkbox"/>	EMI Test Receiver	ESR7	ROHDE & SCHWARZ	102035	2021.11.02
<input checked="" type="checkbox"/>	Tri-Log Antenna	VULB9168	Schwarzbeck	721	2022.03.24
<input checked="" type="checkbox"/>	Amplifier	TK-PA6S	TESTEK	120018	2021.11.02
<input checked="" type="checkbox"/>	Attenuator	PE7047-6	Pasternack	#1	2022.03.24
<input type="checkbox"/>	COMMON MODE ABSORPTION DEVICE	CMAD1614	Schwarzbeck	00095	2021.11.04

Used equipments – (Above 1 GHz)

Used	Equipment	Model name	Manufacturer	Serial No.	Next Cal.
<input checked="" type="checkbox"/>	EMI Test Receiver	ESR7	ROHDE & SCHWARZ	101302	2021.03.13
<input checked="" type="checkbox"/>	Double Ridged Broadband Horn Antenna(KOLAS)	BBHA 9120D	Schwarzbeck	9120D-1245	2021.03.23
<input checked="" type="checkbox"/>	Amplifier	TK-PA18S	TESTEK	140002	2021.03.13

Measurement Data:

- Refer to the Next page (Maximum emission configuration)

Below 1 GHz


RE

2021-02-08

Test Report

Common Information

Test Description:	A2021-01594
Test Mode:	Operating Mode
Test Standard:	EN 50130-4
Environment Conditions:	AC 230 V 50 Hz / Temp 21 Humi 50
Operator Name:	YOO Byeongkook
Comment:	

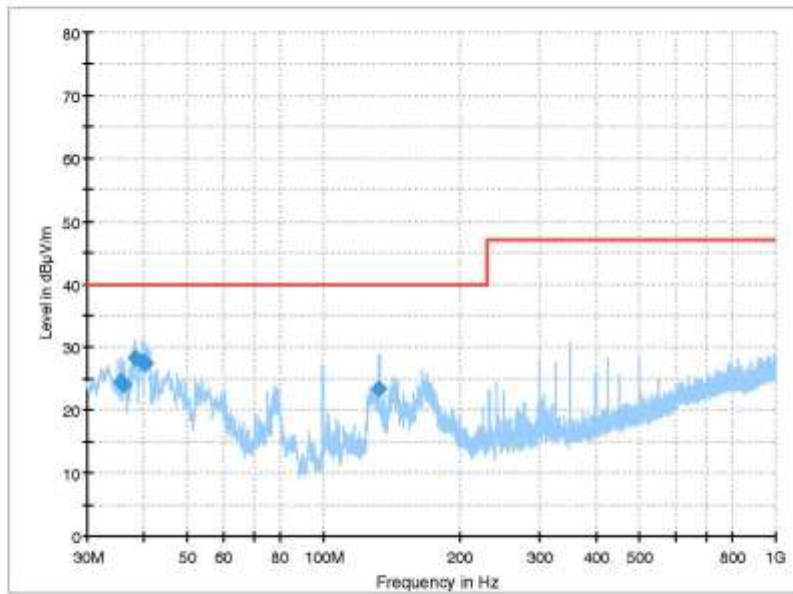

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
35.628000	24.54	40.00	15.46	2000.0	120.000	100.0	V	144.0	-30.4
36.208000	23.99	40.00	16.01	2000.0	120.000	100.0	V	144.0	-30.3
38.245000	28.37	40.00	11.63	2000.0	120.000	100.0	V	144.0	-29.9
39.700000	27.68	40.00	12.32	2000.0	120.000	100.0	V	144.0	-29.6
40.379000	27.31	40.00	12.69	2000.0	120.000	100.0	V	144.0	-29.5
132.723000	23.33	40.00	16.67	2000.0	120.000	200.0	V	182.0	-28.7

1 / 1

Result(dBµV/m)= Reading(dBµV/m) + Antenna + cable Loss- Amp. + Attenuator

Above 1 GHz

-Horizontal


HOR

2021-02-16

Test Report

Common Information

Test Description:	A2021-01594
Test Mode	Operating Mode
Test Standard:	EN 50130-4
Environment Conditions:	AC 230 V, 50Hz / temp. 20 Humi. 49
Operator Name:	YOO Byeongkook
Comment:	-

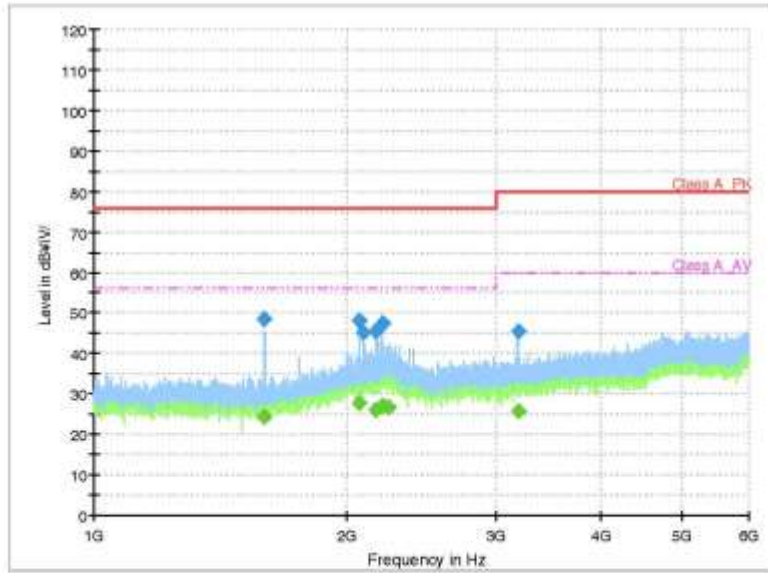

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1596.666667	48.51	—	76.00	27.49	1000.0	1000.000	100.0	H	167.0	-11.4
1596.666667	—	24.28	56.00	31.72	1000.0	1000.000	100.0	H	167.0	-11.4
2066.666667	46.02	—	76.00	27.98	1000.0	1000.000	100.0	H	258.0	-6.5
2066.666667	—	27.76	56.00	28.24	1000.0	1000.000	100.0	H	258.0	-6.5
2091.944444	45.02	—	76.00	30.98	1000.0	1000.000	100.0	H	149.0	-6.0
2166.388889	—	26.17	56.00	29.83	1000.0	1000.000	100.0	H	113.0	-5.7
2166.388889	45.55	—	76.00	30.45	1000.0	1000.000	100.0	H	113.0	-5.7
2207.222222	—	27.13	56.00	28.87	1000.0	1000.000	100.0	H	258.0	-5.2
2207.222222	47.59	—	76.00	28.41	1000.0	1000.000	100.0	H	258.0	-5.2
2236.944444	—	26.79	56.00	29.21	1000.0	1000.000	100.0	H	149.0	-4.8
3199.444444	45.60	—	80.00	34.40	1000.0	1000.000	100.0	H	185.0	-2.6
3199.444444	—	25.82	60.00	34.18	1000.0	1000.000	100.0	H	185.0	-2.6

1 / 1

$$\text{Level[dB}\mu\text{V/m]} = \text{Read level[dB}\mu\text{V/m]} + \text{Factor[dB]}$$

-Vertical


VER

2021-02-16

Test Report

Common Information

Test Description:	A2021-01594
Test Mode:	Operating Mode
Test Standard:	EN 50130-4
Environment Conditions:	AC 230 V, 50Hz / temp. 20 Humi. 49
Operator Name:	YOO Byeongkook
Comment:	-

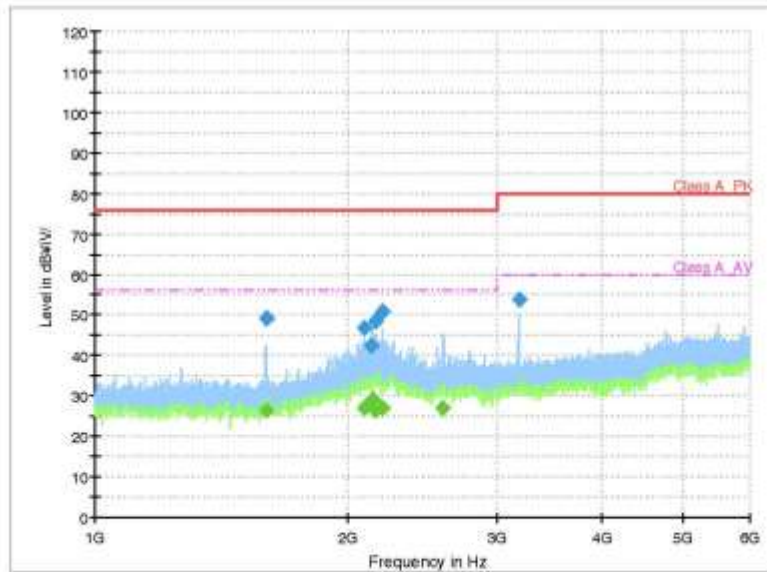

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1596.888889	49.10	---	76.00	26.90	1000.0	1000.000	100.0	V	160.0	-11.4
1596.888889	---	26.52	56.00	29.48	1000.0	1000.000	100.0	V	160.0	-11.4
2088.611111	---	27.02	56.00	28.98	1000.0	1000.000	100.0	V	89.0	-6.1
2088.611111	46.91	---	76.00	29.09	1000.0	1000.000	100.0	V	89.0	-6.1
2133.888889	42.56	---	76.00	33.44	1000.0	1000.000	100.0	V	196.0	-5.9
2136.111111	---	28.94	56.00	27.06	1000.0	1000.000	100.0	V	53.0	-5.9
2154.166667	46.35	---	76.00	27.65	1000.0	1000.000	100.0	V	142.0	-5.8
2155.000000	---	26.39	56.00	29.61	1000.0	1000.000	100.0	V	294.0	-5.8
2195.555556	50.85	---	76.00	25.15	1000.0	1000.000	100.0	V	71.0	-5.3
2195.555556	---	26.97	56.00	29.03	1000.0	1000.000	100.0	V	71.0	-5.3
2588.888889	---	26.93	56.00	29.07	1000.0	1000.000	100.0	V	160.0	-5.4
3196.944444	53.72	---	80.00	26.28	1000.0	1000.000	100.0	V	106.0	-2.6

1 / 1

$$\text{Level[dB}\mu\text{V/m]} = \text{Read level[dB}\mu\text{V/m]} + \text{Factor[dB]}$$

3.2.2 Requirements for radiated emissions from FM receivers

Definition:

The test assesses the ability of ancillary equipment to limit their internal noise from being radiated from the enclosure.

The tests were performed according to the NT-QP-014 procedure of the NTREE Co., Ltd.

Test method	:	EN 55032: 2015/+A11: 2020
Measuring Distance	:	<input type="checkbox"/> 10 m / <input type="checkbox"/> 3 m
Measurement Frequency range	:	30 MHz to 1 000 MHz
Measurement RBW	:	120 kHz
Test mode	:	- mode
Result	:	Not Applicable

A sample calculation:

- C.F (correction factor)= Ant. Factor + Cable loss – (Amp. + 10 dB Att.)
- Emission Level= meter reading + C.F
- Sample calculation ;
 At Frequency : - Result = Reading + C.F. = +- (-) = - [dB(μV/m)]
- Measurement Data's kept in NTREE Co., Ltd.

Limit - CLASS B

Frequency Range (MHz)	Quasi-peak (dB(μV/m))		Distance (m)
	Fundamental	Harmonics	
30 to 230	50	42	10
230 to 300		42	
300 to 1 000		46	
30 to 230	60	52	3
230 to 300		52	
230 to 1 000		56	

Used equipment

Used	Equipment	Model name	Manufacturer	Serial No.	Next Cal.
<input type="checkbox"/>	EMI Test Receiver	ESR7	ROHDE & SCHWARZ	102035	2021.11.02
<input type="checkbox"/>	Tri-Log Antenna(KOLAS)	VULB9168	Schwarzbeck	721	2022.03.24
<input type="checkbox"/>	Amplifier	TK-PA6S	TESTEK	120018	2021.11.02
<input type="checkbox"/>	Attenuator	PE7047-6	Pasternack	#1	2022.03.24

Measurement Data:

- Refer to the Next page (Maximum emission configuration)



3.2.3 Requirements for outdoor units of home satellite receiving systems

Definition:

The test assesses the ability of ancillary equipment to limit their internal noise from being radiated from the enclosure.

The tests were performed according to the NT-QP-014 procedure of the NTREE Co., Ltd.

Test method	: EN 55032: 2015/+A11: 2020
Measuring Distance	: Below 1 GHz - 10 m / Above 1 GHz - 3 m
Measurement Frequency range	: 30 MHz to 6 000 MHz
Measurement RBW	: Below 1 GHz – 120 kHz / Above 1 GHz – 1 MHz
Test mode	: - mode
Result	: Not Applicable

A sample calculation:

- C.F (correction factor)= Ant. Factor + Cable loss – (Amp. + 6 dB Att.) (Below 1 GHz)
- C.F (correction factor)= Ant. Factor + Cable loss – (Amp.) (Above 1 GHz)
- Emission Level= meter reading + C.F
- Sample calculation:
- Below 1 GHz
At Frequency: - Result = Reading + C.F. = +- (-) = - [dB μ V/m]
- Above 1 GHz
At Frequency: - Result = Reading + C.F. = +- (-) = - [dB μ V/m]
- Measurement Data's kept in NTREE Co., Ltd.

Limit of Requirements for outdoor units of home satellite receiving systems

Frequency Range (MHz)	Measurement		Limits	Applicable to
	Distance (m)	Detector type /Bandwidth		
30 to 230	10	Quasi-peak / 120 kHz	30 dB(μ V/m)	
230 to 1 000			37 dB(μ V/m)	
1 000 to 2 500	3	Average / 1 MHz	50 dB(μ V/m)	LO leakage and spurious radiated emissions from the EUT, in the region outside $\pm 7^\circ$ of the main beam axis.
2 500 to 18 000			64 dB(μ V/m)	
1 000 to 18 000	3		37 dB(μ V/m)	LO leakage from the EUT, in the region within $\pm 7^\circ$ of the main beam axis.
1 000 to 18 000	N/A		30 dBpW	

For details of the EUT configuration, see Annex H of EN 55032.
 For radiated emissions measurements at frequencies up to 1 GHz, the requirements defined in Table
 Limit of below 1 GHz - CLASS B at 3.2.1 shall be satisfied.
 Apply the appropriate limits across the entire frequency range.

Used equipments – (Below 1 GHz)

Used	Equipment	Model name	Manufacturer	Serial No.	Next Cal.
<input type="checkbox"/>	EMI Test Receiver	ESR7	ROHDE & SCHWARZ	102035	2021.11.02
<input type="checkbox"/>	Tri-Log Antenna(KOLAS)	VULB9168	Schwarzbeck	721	2022.03.24
<input type="checkbox"/>	Amplifier	TK-PA6S	TESTEK	120018	2021.11.02
<input type="checkbox"/>	Attenuator	PE7047-6	Pasternack	#1	2022.03.24

Used equipments – (Above 1 GHz)

Used	Equipment	Model name	Manufacturer	Serial No.	Next Cal.
<input type="checkbox"/>	EMI Test Receiver	ESR7	ROHDE & SCHWARZ	101302	2021.03.13
<input type="checkbox"/>	Double Ridged Broadband Horn Antenna(KOLAS)	BBHA 9120D	Schwarzbeck	9120D-1245	2021.03.23
<input type="checkbox"/>	Amplifier	TK-PA18S	TESTEK	140002	2021.03.13

3.2.4 Requirements for conducted emissions from the AC mains power ports

Definition:

The test assesses the ability of the EUT to limit its internal noise from being present on the AC mains Power and Signal Line In / Output ports.

The tests were performed according to the NT-QP-014 procedure of the NTREE Co., Ltd.

Test method	: EN 55032: 2015/+A11: 2020
Measurement Frequency range and RBW	: 150 kHz – 30 MHz : 9 kHz
Test mode	: Operating Mode
Result	: Complies

A sample calculation:

- C.F (correction factor)= LISN Insertion loss + Cable loss
- Emission Level= meter reading + C.FP
- Sample calculation;
- At Frequency: **18.3284 Mhz** Result = Reading + C.F. = **23.32+ (10.1) = 33.42 [dBμV/m]**
 (Quasi-peak, CISPR Average)
- Measurement Data's kept in NTREE Co., Ltd.

Limits for conducted emissions from the AC mains ports of class A equipment.

Applicable to AC mains power port		
Frequency Range(MHz)	Quasi-peak (dB(μV))	CISPR Average (dB(μV))
0.15 to 0.5	79	66
0.5 to 30	73	60
Apply across the entire frequency range.		

Limits for conducted emissions from the AC mains ports of class B equipment.

Applicable to AC mains power port		
Frequency Range (MHz)	Quasi-peak (dB(μV))	CISPR Average (dB(μV))
0.15 to 0.5	66 to 56	56 to 46
0.5 to 5	56	46
5 to 30	60	50
Apply across the entire frequency range.		

Used equipment

Used	Equipment	Model name	Manufacturer	Serial No.	Next Cal.
<input checked="" type="checkbox"/>	EMI Test Receiver	ESR3	ROHDE & SCHWARZ	102019	2021.11.02
<input checked="" type="checkbox"/>	Two-Line V-Network(MAIN)(KC,CE,FCC)	ENV216	ROHDE & SCHWARZ	102177	2021.03.13
<input checked="" type="checkbox"/>	Two-Line V-Network(SUB)	ENV216	ROHDE & SCHWARZ	102026	2021.11.02
<input type="checkbox"/>	Impedance Stabilization Network	ENY81	ROHDE & SCHWARZ	100227	2021.11.04
<input type="checkbox"/>	Impedance Stabilization Network	ENY81-CA6	ROHDE & SCHWARZ	101731	2021.11.04

Measurement Data:

- (Maximum emission configuration)

- LINE


CE_L

2021-02-09

Test Report

Common Information

Test Description:	A2021-01594
Test Mode:	Operating Mode
Test Standard:	EN 50130-4
Environment Conditions:	AC 230 V 50 Hz, Temp. 19 / Humi. 48
Operator Name:	YOO Byeongkook
Comment:	-

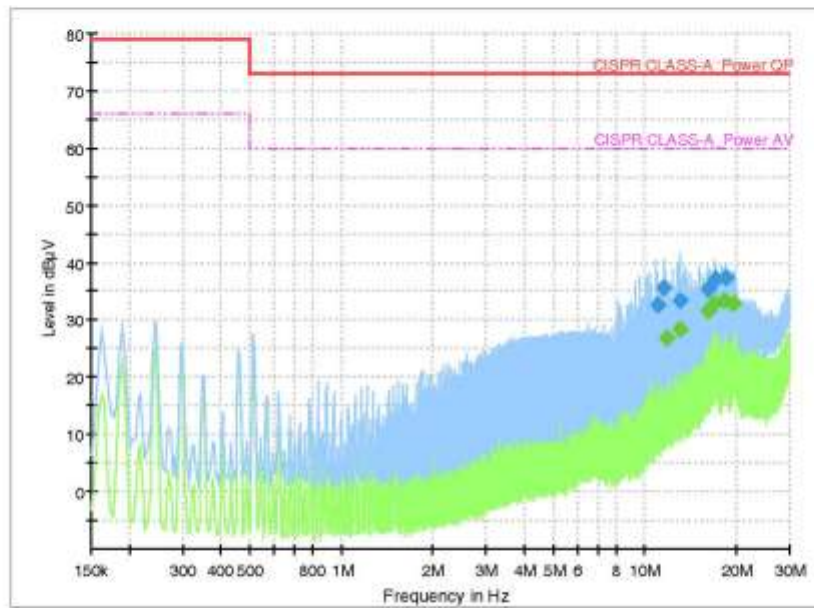

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
11.052200	32.73	---	73.00	40.27	5000.0	9.000	L1	10.0
11.539400	35.59	---	73.00	37.41	5000.0	9.000	L1	10.0
11.786700	---	26.91	60.00	33.09	5000.0	9.000	L1	10.0
12.978200	---	28.32	60.00	31.68	5000.0	9.000	L1	10.0
13.010800	33.37	---	73.00	39.63	5000.0	9.000	L1	10.0
16.222500	35.49	---	73.00	37.51	5000.0	9.000	L1	10.0
16.223800	---	31.62	60.00	28.38	5000.0	9.000	L1	10.0
16.870100	---	32.83	60.00	27.17	5000.0	9.000	L1	10.0
17.035500	37.04	---	73.00	35.96	5000.0	9.000	L1	10.0
18.328400	---	33.42	60.00	26.58	5000.0	9.000	L1	10.1
18.543000	37.50	---	73.00	35.50	5000.0	9.000	L1	10.1
19.626500	---	32.84	60.00	27.16	5000.0	9.000	L1	10.1

1 / 1

- NEUTRAL


CE_N

2021-02-09

Test Report

Common Information

Test Description:	A2021-01594
Test Mode:	Operating Mode
Test Standard:	EN 50130-4
Environment Conditions:	AC 230 V 50 Hz, Temp. 19 / Humi. 48
Operator Name:	YOO Byeongkook
Comment:	-

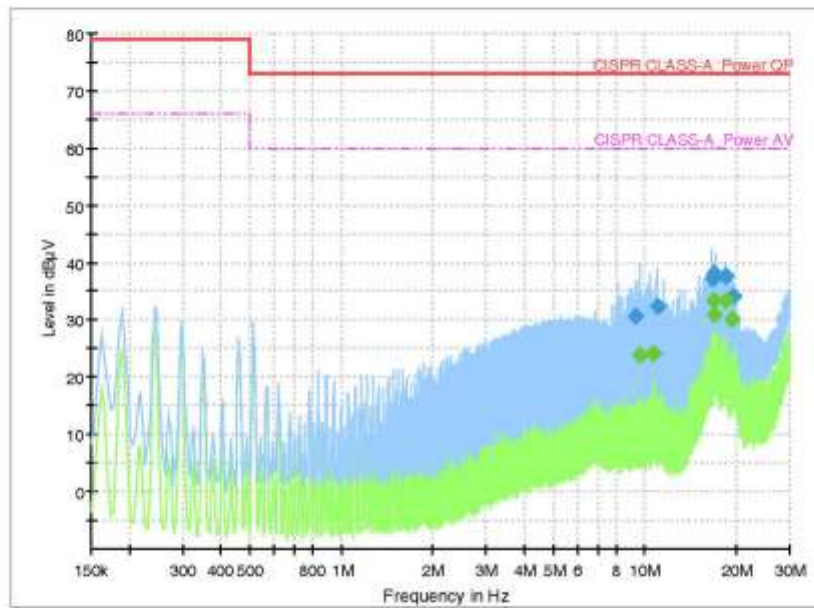

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
9.346350	30.49	—	73.00	42.51	5000.0	9.000	N	9.9
9.680150	—	23.78	60.00	36.22	5000.0	9.000	N	9.9
10.654900	—	24.00	60.00	36.00	5000.0	9.000	N	9.9
10.989200	32.29	—	73.00	40.71	5000.0	9.000	N	9.9
16.710300	37.22	—	73.00	35.78	5000.0	9.000	N	10.0
18.818200	—	33.47	60.00	26.53	5000.0	9.000	N	10.0
18.928700	—	30.77	60.00	29.23	5000.0	9.000	N	10.0
18.978100	38.07	—	73.00	34.93	5000.0	9.000	N	10.0
18.435000	37.63	—	73.00	35.37	5000.0	9.000	N	10.0
18.435000	—	33.39	60.00	26.61	5000.0	9.000	N	10.0
19.302700	—	30.12	60.00	29.88	5000.0	9.000	N	10.1
19.584000	34.12	—	73.00	38.88	5000.0	9.000	N	10.1

1 / 1

3.2.5 Requirements for asymmetric mode conducted emissions

Definition:

The test assesses the ability of the EUT to limit its internal noise from being present on the AC mains Power and Signal Line In / Output ports.

The tests were performed according to the NT-QP-014 procedure of the NTREE Co., Ltd.

Test method	: EN 55032: 2015/+A11: 2020
Measurement Frequency range and RBW	: 150 kHz – 30 MHz : 9 kHz
Test mode	: Operating mode
Result	: Complies

A sample calculation:

- C.F (correction factor)= AAN / CVP / Current Probe Insertion loss + Cable loss
- Emission Level= meter reading + C.F
- Sample calculation;
- At Frequency: **5.435 450 MHz** Result = Reading + C.F. = **43.16+ (9.5) = 52.66 [dBμV/m]**
 Quasi-peak, CISPR Average
- Measurement Data's kept in NTREE Co., Ltd.

Limit of for asymmetric mode conducted emissions from Class A equipment.

1. Wired network ports 2. Optical fiber port with metallic shield or tension members. 3. Antenna ports					
Frequency Range (MHz)	Coupling device	Voltage limits		Current limit	
		Quasi-peak (dB(μV))	Average (dB(μV))	Quasi-peak (dB(μA))	Average (dB(μA))
0.15 to 0.5	AAN	97 to 87	84 to 74	N/A	
0.5 to 30		87	74		
0.15 to 0.5	CVP and current probe	97 to 87	84 to 74	53 to 43	40 to 30
0.5 to 30		87	74	40	30
0.15 to 0.5	current probe	N/A		53 to 43	40 to 30
0.5 to 30				40	30

The choice of coupling device and measurement procedure is defined in Annex C.
 AC mains ports that also have the function of a wired network port shall meet the limits given in Table limits for conducted emissions from the AC mains ports of class A equipment at 3.2.3.
 The measurement shall cover the entire frequency range.
 The application of the voltage and/or current limits is dependent on the measurement procedure used.
 Refer to Table C.1 for applicability.
 Testing is required at only one EUT supply voltage and frequency.
 Applicable to ports listed above and intended to connect to cables longer than 3 m.

Limit of for asymmetric mode conducted emissions from Class B equipment.

1. Wired network ports 2. Optical fiber port with metallic shield or tension members. 3. Broadcast receiver tuner ports 4. Antenna ports					
Frequency Range (MHz)	Coupling device	Voltage limits		Current limit	
		Quasi-peak (dB(μV))	Average (dB(μV))	Quasi-peak (dB(μA))	Average (dB(μA))
0.15 to 0.5	AAN	84 to 74	74 to 64	N/A	
0.5 to 30		74	64		
0.15 to 0.5	CVP and Current probe	84 to 74	74 to 64	40 to 30	30 to 20
0.5 to 30		74	64	30	20
0.15 to 0.5	Current probe	N/A		40 to 30	30 to 20
0.5 to 30				30	20
The choice of coupling device and measurement procedure is defined in Annex C. Screened ports including TV broadcast receiver tuner ports are measured with a common-mode impedance of 150 Ω. This is typically accomplished with the screen terminated by 150 Ω to earth. AC mains ports that also have the function of a wired network port shall meet the limits given in Table limits for conducted emissions from the AC mains ports of class B equipment at 3.2.3. The measurement shall cover the entire frequency range. The application of the voltage and/or current limits is dependent on the measurement procedure used. Refer to Table C.1 for applicability. Testing is required at only one EUT supply voltage and frequency. Applicable to ports listed above and intended to connect to cables longer than 3 m.					

Used equipments:

Used	Equipment	Model name	Manufacturer	Serial No.	Next Cal.
<input checked="" type="checkbox"/>	EMI Test Receiver	ESR3	ROHDE & SCHWARZ	102019	2021.11.02
<input checked="" type="checkbox"/>	Two-Line V-Network(MAIN)(KC,CE,FCC)	ENV216	ROHDE & SCHWARZ	102177	2021.03.13
<input checked="" type="checkbox"/>	Two-Line V-Network(SUB)	ENV216	ROHDE & SCHWARZ	102026	2021.11.02
<input checked="" type="checkbox"/>	Impedance Stabilization Network	ENY81	ROHDE & SCHWARZ	100227	2021.11.04
<input type="checkbox"/>	Impedance Stabilization Network	ENY81-CA6	ROHDE & SCHWARZ	101731	2021.11.04
<input type="checkbox"/>	CDN	CDN ST08A	TESEQ	36643	2021.03.13
<input type="checkbox"/>	Current Probe	EZ-17	ROHDE & SCHWARZ	101003	2021.11.03

Measurement Data:

- (Maximum emission configuration)
- No other emissions were detected at a level greater than 20 dB below limit

- 10 Mbps


CE_TEL_10

2021-02-09

Test Report

Common Information

Test Description:	A2021-01594
Test Mode:	Operating Mode
Test Standard:	EN 50130-4
Environment Conditions:	AC 230 V 50 Hz, Temp. 19 / Humi. 48
Operator Name:	YOO Byeongkook
Comment:	LAN - 10 Mbps

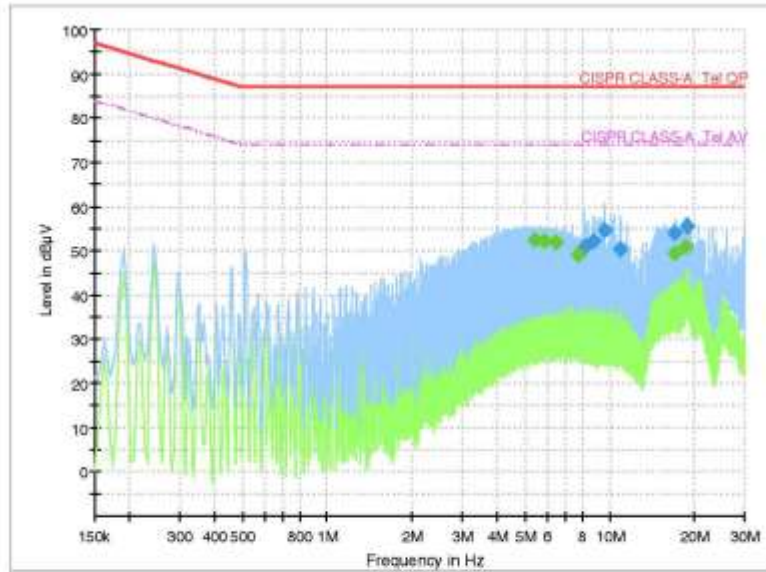

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB)
5.435450	--	52.66	74.00	21.34	1000.0	9.000	9.5
5.867250	--	52.28	74.00	21.72	1000.0	9.000	9.5
6.461750	--	51.74	74.00	22.26	1000.0	9.000	9.5
7.758650	--	49.17	74.00	24.83	1000.0	9.000	9.6
8.182950	50.89	--	87.00	36.11	1000.0	9.000	9.6
8.794150	52.13	--	87.00	34.87	1000.0	9.000	9.6
9.596350	54.53	--	87.00	32.47	1000.0	9.000	9.6
10.868300	50.39	--	87.00	36.61	1000.0	9.000	9.6
16.926000	--	49.56	74.00	24.44	1000.0	9.000	9.8
17.034000	54.08	--	87.00	32.92	1000.0	9.000	9.8
18.653300	--	51.03	74.00	22.97	1000.0	9.000	9.8
18.874500	55.71	--	87.00	31.29	1000.0	9.000	9.8

1 / 1

- 100 Mbps


CE_TEL_100

2021-02-09

Test Report

Common Information

Test Description:	A2021-01594
Test Mode:	Operating Mode
Test Standard:	EN 50130-4
Environment Conditions:	AC 230 V 50 Hz, Temp. 19 / Humi. 48
Operator Name:	YOO Byeongkook
Comment:	LAN - 100 Mbps

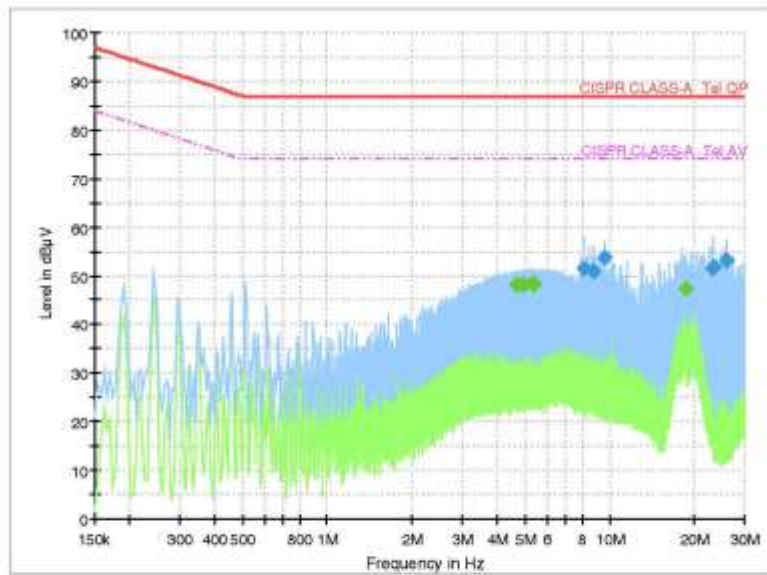

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB)
4.675750	---	48.10	74.00	25.90	1000.0	9.000	9.5
4.944950	---	48.25	74.00	25.75	1000.0	9.000	9.5
5.376850	---	48.08	74.00	25.92	1000.0	9.000	9.5
5.378150	---	48.38	74.00	25.62	1000.0	9.000	9.5
5.378250	---	48.55	74.00	25.45	1000.0	9.000	9.5
8.122950	51.63	---	87.00	35.37	1000.0	9.000	9.6
8.794150	51.05	---	87.00	35.95	1000.0	9.000	9.6
9.596350	53.81	---	87.00	33.19	1000.0	9.000	9.6
18.535100	---	47.36	74.00	26.64	1000.0	9.000	9.8
23.129000	51.43	---	87.00	35.57	1000.0	9.000	9.9
23.326000	51.89	---	87.00	35.11	1000.0	9.000	9.9
26.013500	53.10	---	87.00	33.90	1000.0	9.000	10.0

1 / 1

3.2.6 Requirements for conducted differential voltage emissions

Definition:

The test assesses the ability of the EUT to limit its internal noise from being present on the AC mains Power and Signal Line In / Output ports.

The tests were performed according to the NT-QP-014 procedure of the NTREE Co., Ltd.

Test method	: EN 55032: 2015/+A11: 2020
Measurement Frequency range and RBW(Detector)	: Below 1 GHz : 120 kHz (Quasi Peak) Above 1 GHz : 1 MHz (Peak)
Test mode	: — mode
Result	: Not Applicable

A sample calculation:

- C.F (correction factor) = Matching pad + POWER SPLITTER/COMBINER + Cable loss
- Emission Level= meter reading + C.F
- Sample calculation;
- At Frequency: - Result = Reading + C.F. = ++ (-) = - [dBµV]
- Measurement Data's kept in NTREE Co., Ltd.

Limit of for conducted differential voltage emissions from Class B equipment.

Applicable to					
1. TV broadcast receiver tuner ports with an accessible connector 2. RF modulator output ports 3. FM broadcast receiver tuner ports with an accessible connector					
Frequency Range (MHz)	Coupling device	Class B limits dB(μ V) 75 Ω			Applicability
		Other	Local Oscillator Fundamental	Local Oscillator Harmonics	
30 to 950	For frequencies ≤ 1 GHz Quasi Peak/ 120 kHz	46	46	46	See ^a
950 to 2 150		46	54	54	
950 to 2 150		For frequencies ≥ 1 GHz Peak/ 1 MHz	46	54	54
30 to 300	46		54	50	See ^c
300 to 1 000				52	
30 to 300	46		66	59	See ^d
300 to 1 000		52			
30 to 950	46	76	46	See ^e	
950 to 2150			N/A		54

a Television receivers (analogue or digital), video recorders and PC TV broadcast receiver tuner cards working in channels between 30 MHz and 1 GHz, and digital audio receivers.

b Tuner units (not the LNB) for satellite signal reception.

c Frequency modulation audio receivers and PC tuner cards.

d Frequency modulation car radios.

e Applicable to EUTs with RF modulator output ports (for example DVD equipment, video recorders, camcorders and decoders etc.) designed to connect to TV broadcast receiver tuner ports. Limits specified for the LO are for the RF modulator carrier signal and harmonics.

The term 'other' refers to all emissions other than the fundamental and the harmonics of the LO.

The measurement shall cover the entire frequency range.

The EUT shall be tuned in accordance with Table B.3 and clause C.4.2.1.

Used equipments:

Used	Equipment	Model name	Manufacturer	Serial No.	Next Cal.
<input type="checkbox"/>	EMI Receiver	ESR7	Rohde & Schwarz	101302	2021.03.13
<input type="checkbox"/>	POWER SPLITTER/COMBINER	ZFRSC-42-S+	Mini-Circuits	SUU90901305	2021.03.13
<input type="checkbox"/>	MATCHING PAD	UNMP-5075+	Mini-Circuits	VUU01601305	2021.03.13
<input type="checkbox"/>	Impedance Matching Box	TIB-R1	TESTEC	150054-R	-
<input type="checkbox"/>	color TV pattern generator	PM5418	PHILIPS	LO 634427	-
<input type="checkbox"/>	All-Band Modulator	DTA-2115	DekTec	2115000354	-

Measurement Data:

- (Maximum emission configuration)



3.2.7 Harmonic Current (AC power input port)

Definition:

This part deals with the Limitation of harmonic currents injected into the public supply system.
 The tests were performed according to the NT-QP-014 procedure of the NTREE Co., Ltd.

Test method : **EN IEC 61000-3-2:2019**
 Test mode : Operating Mode
 Result : **Complies**


Measurement Data:

Uncertainty(HAR) = +/- 2.24 % (with a 95 % confidence level, k = 2)

“It has been demonstrated that the HAR generator meets the specified requirements in the standard with at least 95 % confidence.”

Used equipments:

Used	Equipment	Model name	Manufacturer	Serial No.	Next Cal.
<input checked="" type="checkbox"/>	HAR1000 System	HAR1000-1P	EMC PARTNER	HAR1000-1P 230V-0212	2021.08.03

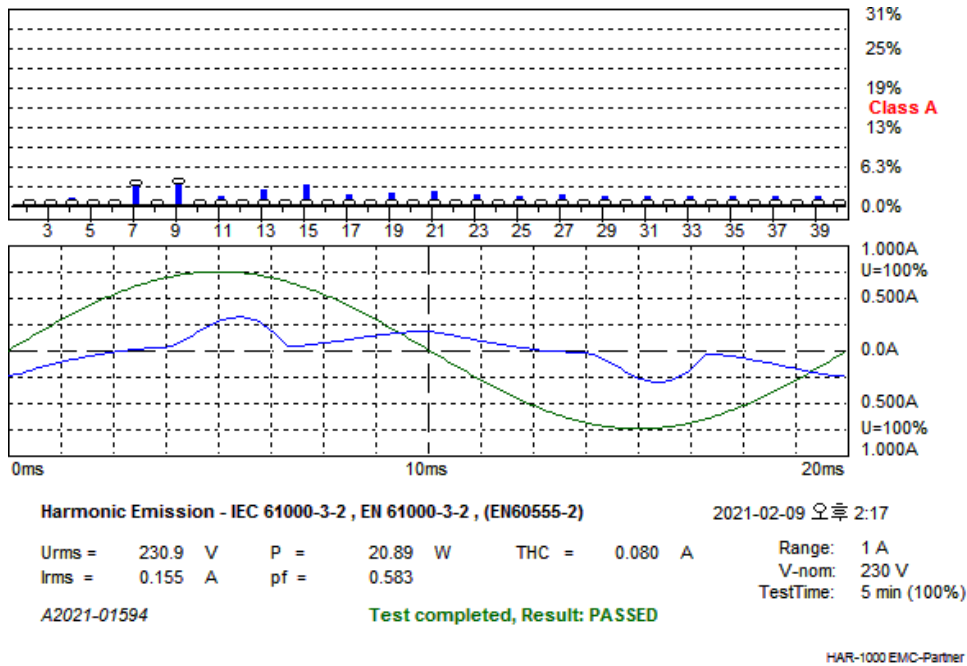

Operator YOO Byeongkook

Unit A2021-01594

Serial Number N/A

Remarks

Urms = 230.9V Freq = 50.065 Range: 1 A

Irms = 0.155A Ipk = 0.315A cf = 2.028

P = 20.89W S = 35.85VA pf = 0.583

THDi = 59.9 % THDu = 0.10 % Class A

Test - Time : 5min (100 %)

Test completed, Result: PASSED

Order	Freq. [Hz]	Iavg [A]	Irms [A]	I _{max} [A]	Limit [A]	Status
1	50	0.1334	0.1335	0.1336		
2	100	0.0100	0.0100	0.0102	1.0800	
3	150	0.0525	0.0525	0.0526	2.3000	
4	200	0.0000	0.0039	0.0039	0.4300	
5	250	0.0517	0.0516	0.0518	1.1400	
6	300	0.0000	0.0016	0.0017	0.3000	
7	350	0.0236	0.0236	0.0236	0.7700	
8	400	0.0000	0.0016	0.0016	0.2300	
9	450	0.0142	0.0142	0.0142	0.4000	
10	500	0.0000	0.0006	0.0006	0.1840	
11	550	0.0000	0.0037	0.0038	0.3300	
12	600	0.0000	0.0001	0.0001	0.1533	
13	650	0.0000	0.0049	0.0049	0.2100	
14	700	0.0000	0.0002	0.0002	0.1314	
15	750	0.0000	0.0045	0.0045	0.1500	

16	800	0.0000	0.0001	0.0001	0.1150
17	850	0.0000	0.0020	0.0020	0.1324
18	900	0.0000	0.0001	0.0001	0.1022
19	950	0.0000	0.0020	0.0020	0.1184
20	1000	0.0000	0.0001	0.0001	0.0920
21	1050	0.0000	0.0020	0.0020	0.1071
22	1100	0.0000	0.0001	0.0001	0.0836
23	1150	0.0000	0.0014	0.0014	0.0978
24	1200	0.0000	0.0001	0.0001	0.0767
25	1250	0.0000	0.0012	0.0012	0.0900
26	1300	0.0000	0.0001	0.0001	0.0708
27	1350	0.0000	0.0012	0.0012	0.0833
28	1400	0.0000	0.0001	0.0001	0.0657
29	1450	0.0000	0.0010	0.0010	0.0776
30	1500	0.0000	0.0000	0.0001	0.0613
31	1550	0.0000	0.0008	0.0008	0.0726
32	1600	0.0000	0.0000	0.0001	0.0575
33	1650	0.0000	0.0008	0.0008	0.0682
34	1700	0.0000	0.0000	0.0001	0.0541
35	1750	0.0000	0.0008	0.0008	0.0643
36	1800	0.0000	0.0000	0.0001	0.0511
37	1850	0.0000	0.0007	0.0007	0.0608
38	1900	0.0000	0.0001	0.0001	0.0484
39	1950	0.0000	0.0006	0.0006	0.0577
40	2000	0.0000	0.0001	0.0001	0.0460

3.2.8 Voltage Variation and Flicking (AC power input port)

Definition:

This section is concerned with the limitation of voltage fluctuations and flicker impressed on the public low-voltage system.

The tests were performed according to the NT-QP-014 procedure of the NTREE Co., Ltd.

Test method : **EN 61000-3-3:2013+A1:2019**
 Test mode : Operating Mode
 Result : **Complies**


Measurement Data:

Uncertainty(HAR) = +/- 2.24 % (with a 95 % confidence level, k = 2)


“It has been demonstrated that the HAR generator meets the specified requirements in the standard with at least 95 % confidence.”

Used equipments:

Used	Equipment	Model name	Manufacturer	Serial No.	Next Cal.
<input checked="" type="checkbox"/>	HAR1000 System	HAR1000-1P	EMC PARTNER	HAR1000-1P 230V-0212	2021.08.03

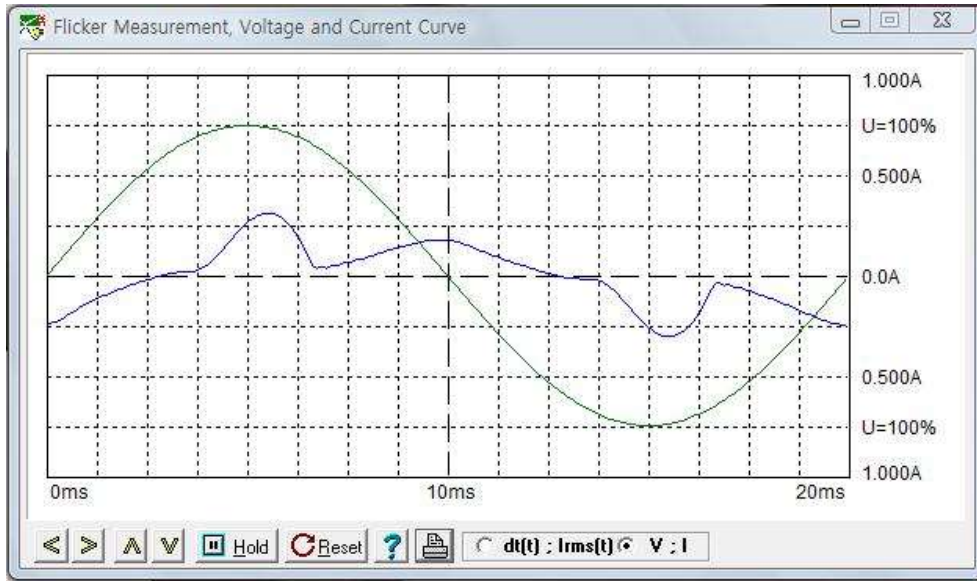

Flickermeter 1000-4-15 for 230V/50Hz

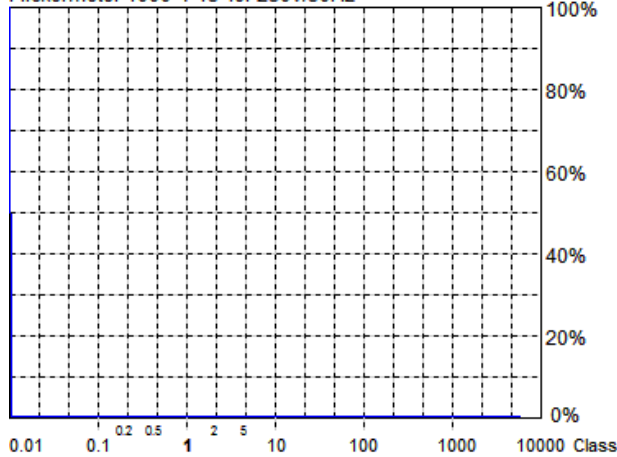

Actual Flicker (Fli):	0.00
Short-term Flicker (Pst):	0.07
Limit (Pst):	1.00
Long-term Flicker (Plt):	0.07
Limit (Plt):	0.65
Maximum Relative Volt. Change (dmax):	0.00%
Limit (dmax):	4.00%
Relative Steady-state Voltage Change (dc):	0.00%
Limit (dc):	3.00%
Maximum Interval exceeding 3.00% (dt):	0.00ms
Limit (dt>Lim):	200ms

Flicker Emission - IEC 61000-3-3, EN 61000-3-3

Urms = 230.9 V P = 20.84 W
 Irms = 0.155 A pf = 0.583

A2021-01594

Test completed, Result: PASSED

2021-02-09 오후 2:33

Range: 1 A
 V-nom: 230 V
 TestTime: 10 min (100%)

HAR-1000 EMC-Partner

Operator YOO Byeongkook

Unit A2021-01594

Serial Number N/A

Remarks

Urms = 230.9V Freq = 50.065 Range: 1 A

Irms = 0.155A Ipk = 0.313A cf = 2.022

P = 20.84W S = 35.74VA pf = 0.583

Test - Time : 1 x 10min = 10min (100 %)

LIN (Line Impedance Network) : L: 0.24ohm +j0.15ohm N: 0.16ohm +j0.10ohm

Limits : Plt : 0.65 Pst : 1.00
dmax : 4.00 % dc : 3.00 %
dtLim: 3.00 % dt>Lim: 200ms

Test completed, Result: PASSED

	dmax
	[%]
1	0.000

3.3 IMMUNITY

3.3.1 Electrostatic Discharge

Definition:

The test assesses the ability of the EUT to operate as intended in the event of an electrostatic discharge.

The tests were performed according to the NT-QP-014 procedure of the NTREE Co., Ltd.

Test method	: EN 61000-4-2:2009
Temperature / Humidity / Pressure	: 19 °C / 41 % R.H. / 101.3 kPa
Discharge Impedance	: (330 ±10%) Ω / (150 ±10%) pF
Type of Discharge (air discharge)	: ± 2, 4, 8 kV
Type of Discharge (contact discharge)	: ± 6 kV
Number of discharges at each point	: 20 of each polarity
Discharge Repetition on Rate	: 1 / sec
Test mode	: Operating Mode
Performance Criteria	: B (Refer to the attachment I)
Result	: Complies

Measurement Data:

- Uncertainty (ESD) = +/- 5 % (with a 95 % confidence level, k = 2)

“It has been demonstrated that the ESD generator meets the specified requirements in the standard with at least 95 % confidence.”

Used equipments

Used	Equipment	Model name	Manufacturer	Serial No.	Next Cal.
<input checked="" type="checkbox"/>	ESD Simulator	ESD 30N	EM TEST	P1315117206	2021.03.17

ESD Test Point and Result:
1. Indirect Discharge


No.	Position	Kind of Discharge	Results	Remarks
1	HCP	Contact	A	No reaction recognized.
2	VCP	Contact	A	No reaction recognized.

2. Direct Discharge

No.	Position	Kind of Discharge	Result	Remarks
1	ENCLOSURE, SCREW	Contact	A	No reaction recognized.
2	LENS	Air	A	No reaction recognized.
3	LAN	Air	A	No reaction recognized.



[Test point] Air Discharge(A)>
 Contact Discharge(C) ———>

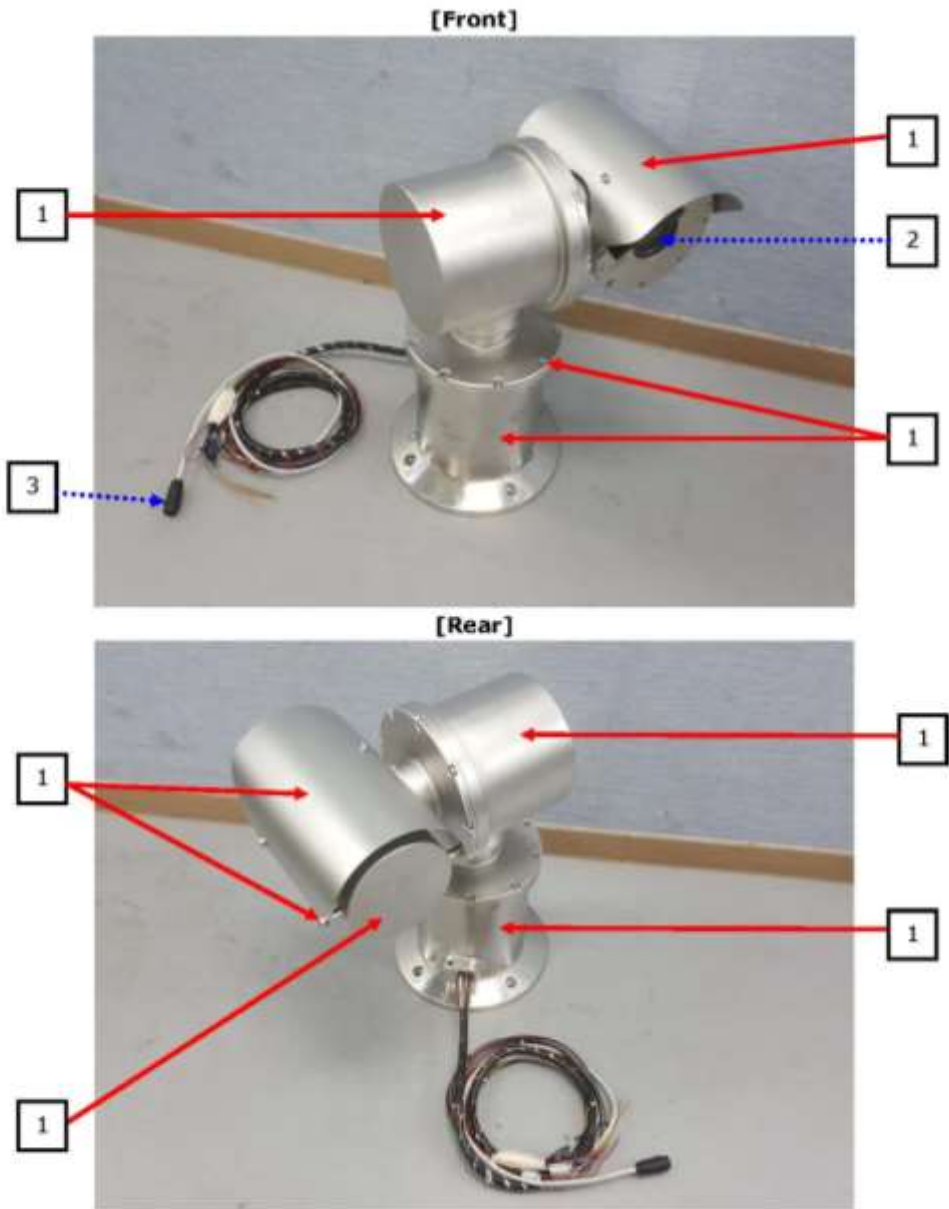

3.3.2 RF Electromagnetic Field

Definition:

The test assesses the ability of the EUT to operate as intended in the presence of a radio frequency electromagnetic field disturbance.

The tests were performed according to the NT-QP-014 procedure of the NTREE Co., Ltd.

Test method	: EN 61000-4-3:2006/A2:2010
Frequency range and Test level	: 80 MHz to 2.7 GHz
Test level	: 10 V/m (r.m.s) (unmodulated)
Duty cycle	: 80 % AM, 1 kHz, sinusoidal Pulse modulation : 1 Hz (0.5 s ON : 0.5 s OFF)
Rep. frequency	: 1 % of fundamental
Test mode	: Operating Mode
Performance Criteria	: A (Refer to the attachment I)
Result	: Complies

Used equipments:

Used	Equipment	Model name	Manufacturer	Serial No.	Next Cal.
<input checked="" type="checkbox"/>	Signal Generator	N5181A	Agilent technologies	MY50145570	2021.03.13
<input checked="" type="checkbox"/>	Log. - Per. Antenna	STLP9128DS	Schwarzbeck	9128DS 052	-
<input checked="" type="checkbox"/>	Double Ridged Broadband Horn Antenna	BBHA 9120D	Schwarzbeck	9120D-1245	2021.03.23
<input checked="" type="checkbox"/>	RF power meter	N1914A	Agilent technologies	MY54100025	2021.03.13
<input checked="" type="checkbox"/>	RF Power Amplifiers	250W1000B	AR	0456836	-
<input checked="" type="checkbox"/>	RF Power Amplifiers	50S1G6	AR	0433927	-
<input checked="" type="checkbox"/>	Directional coupler	DC6180A	AR	0433802	2021.03.13
<input checked="" type="checkbox"/>	Directional coupler	DC7200	AR	0433902	2021.03.13
<input checked="" type="checkbox"/>	Average Power Sensor	E9304A	Agilent technologies	MY54110001	2021.03.13
<input checked="" type="checkbox"/>	Average Power Sensor	E9304A	Agilent technologies	MY54110004	2021.03.13

Measurement Data:

- Uncertainty = +/- 1.6 dB (with a 95 % confidence level, k = 2.28)

“It has been demonstrated that the RS generator meets the specified requirements in the standard with at least 95 % confidence.”

Port	Test mode	Result		Remark
		Horizontal	Vertical	
Enclosure	Operating Mode	A	A	No reaction recognized.

3.3.3 Electrical Fast Transients common mode

Definition:

The test assesses the ability of the EUT to operate as intended in the event of Electrical Fast Transients presence on one of the input/output ports.

The tests were performed according to the NT-QP-014 procedure of the NTREE Co., Ltd.

Test method	: EN 61000-4-4:2004/A1:2010
Signal line length	: <input checked="" type="checkbox"/> Above 3 m, <input type="checkbox"/> Below 3 m
Test level	: <input checked="" type="checkbox"/> ± 1.0 kV (Signal port, DC power input port)
	: <input checked="" type="checkbox"/> ± 2.0 kV (AC power input port))
Polarity	: Negative/ positive
Repetition frequency	: 100 kHz Tr/Th = 5 / 50 ns
Test mode	: Operating Mode
Performance Criteria	: B (Refer to the attachment I)
Result	: Complies

Used equipments:

Used	Equipment	Model name	Manufacturer	Serial No.	Next Cal.
<input checked="" type="checkbox"/>	EMC IMMUNITY TEST SYSTEM(SURGE,BURST,DIP)	IMU3000	EMC PARTNER	F5-S6-T6-D-V-1504	2021.11.03
<input type="checkbox"/>	CDN(1.25/50, 10/700)	CDN UTP ED3	EMC PARTNER	ED3-1516	2021.11.03
<input checked="" type="checkbox"/>	Capacitive coupling clamp	CN-EFT1000	EMC PARTNER	1651	2021.11.03

Measurement Data:

- Uncertainty = +/- 10 % (with a 95 % confidence level, k = 2)

“It has been demonstrated that the EFT/Burst generator meets the specified requirements in the standard with at least 95 % confidence.”

- Power port

Line	Test level	Result	Remarks
L – N	± 2.0 kV	A	No reaction recognized.
L – N – PE	± 2.0 kV	—	—
Positive - Negative	± 1.0 kV	—	—

- Signal line port

Line	Test level	Result	Remarks
LAN	± 1 kV	A	No reaction recognized.

3.3.4 Surge

Definition:

The test assesses the ability of the EUT to operate as intended in the event of surge presence on the AC main power input ports.

The tests were performed according to the NT-QP-014 procedure of the NTREE Co., Ltd.

Test method	: EN 61000-4-5:2006		
Polarity pulses	: 0°, 90°, 180°, 270°		
Test level	AC Power port	: <input checked="" type="checkbox"/>	± 0.5, 1.0 kV (Line to Line)
		: <input type="checkbox"/>	± 0.5, 1.0, 2.0 kV (Line to Ground)
	Signal lines /	: <input type="checkbox"/>	± 0.5, 1.0 kV
	Other supply lines		
Wave shape	: 1.2 / 50 μs pulse		
Number of surges	: 5 (at each phase)		
Test mode	: Operating mode		
Performance Criteria	: B (Refer to the attachment I)		
Result	: Complies		

Used equipments:

Used	Equipment	Model name	Manufacturer	Serial No.	Next Cal.
<input checked="" type="checkbox"/>	EMC IMMUNITY TEST SYSTEM(SURGE,BURST,DIP)	IMU3000	EMC PARTNER	F5-S6-T6-D-V-1504	2021.11.03
<input type="checkbox"/>	CDN(1.25/50, 10/700)	CDN UTP ED3	EMC PARTNER	ED3-1516	2021.11.03

Measurement Data:

- Uncertainty = +/- 10 % (with a 95 % confidence level, k = 2)

“It has been demonstrated that the Surge generator meets the specified requirements in the standard with at least 95 % confidence.”

- AC Power port

Phase	Line	Level	Result	Remark
0°	Line(L) to line(N)	± 1.0 kV	A	No reaction recognized.
	Line(L) to ground(PE)	± 2.0 kV	-	-
	Line(N) to ground(PE)	± 2.0 kV	-	-
90°	Line(L) to line(N)	± 1.0 kV	A	No reaction recognized.
	Line(L) to ground(PE)	± 2.0 kV	-	-
	Line(N) to ground(PE)	± 2.0 kV	-	-
180°	Line(L) to line(N)	± 1.0 kV	A	No reaction recognized.
	Line(L) to ground(PE)	± 2.0 kV	-	-
	Line(N) to ground(PE)	± 2.0 kV	-	-
270°	Line(L) to line(N)	± 1.0 kV	A	No reaction recognized.
	Line(L) to ground(PE)	± 2.0 kV	-	-
	Line(N) to ground(PE)	± 2.0 kV	-	-

- DC Power port

Line	Level	Result	Remark
-	± - kV	-	-

- Signal port

Port	Level	Result	Remark
-	± - kV	-	-

3.3.5 RF current common mode

Definition:

The test assesses the ability of the EUT to operate as intended in the presence of a radio frequency electromagnetic disturbance on the input/output ports.

The tests were performed according to the NT-QP-014 procedure of the NTREE Co., Ltd.

Test method	: EN 61000-4-6:2009
Frequency range	: 0.15 MHz to 100 MHz
Test level	: 140 dB μ V (r.m.s) (unmodulated) 10 V (Modulated)
Amplitude Modulation	: 80 % AM, 1 kHz, sinusoidal
Pulse Modulation	: 1 Hz (0.5 s ON : 0.5 s OFF)
Step size	: 1 % of fundamental.
Test mode	: Operating Mode
Performance Criteria	: A (Refer to the attachment I)
Result	: Complies

Used equipments:

Used	Equipment	Model name	Manufacturer	Serial No.	Next Cal.
<input checked="" type="checkbox"/>	POWER AMPLIFIER	RPA2575A	DARE	17I00022SNO03	-
<input checked="" type="checkbox"/>	SIGNAL GENERATOR	CTR1004B	DARE	17I00026SNO34	2021.03.13
<input checked="" type="checkbox"/>	POWER SENSOR	RPR2006C	DARE	15I00037SNO55	2021.03.13
<input checked="" type="checkbox"/>	POWER SENSOR	RPR2006C	DARE	15I00037SNO56	2021.03.13
<input checked="" type="checkbox"/>	CDN	CDN M016	TESEQ	44553	2021.11.02
<input type="checkbox"/>	CDN	CDN T2	EM TEST	P1348126361	2021.03.13
<input type="checkbox"/>	CDN	CDN S501A	TESEQ	44479	2021.11.02
<input type="checkbox"/>	CDN	CDN S751A	TESEQ	44734	2021.11.02
<input type="checkbox"/>	CDN	CDN S8 RJ45	EM TEST	P1345125806	2021.03.13
<input type="checkbox"/>	CDN	CDN T8 RJ45	EM TEST	P1343125197	2021.03.13
<input checked="" type="checkbox"/>	RF INJECTION CLAMP	KEMZ801A	TESEQ	44985	2021.11.04

Measurement Data:

- Uncertainty = +/-1.25 dB (with a 95 % confidence level, k = 2)

- AC / DC POWER port

Port	Mode	Result	Remarks
AC Power	Operating mode	A	No reaction recognized

- Signal port

Signal Line	Mode	Result	Remarks
LAN	Operating mode	A	No reaction recognized

3.3.6 Voltage dips and interruptions

Definition:

The test assesses the ability of the EUT to operate as intended in the event of voltage dips and interruptions present on the AC mains power input ports.

The tests were performed according to the NT-QP-014 procedure of the NTREE Co., Ltd.

Test method	: EN 61000-4-11:2004
Voltage drop and Interruption	: 40 % for duration of 10 period 70 % for duration of 25 period 0 %, 80 % for duration of 250 period
Ut	: -
Test mode	: Operating mode
Performance Criteria	: B, B, B, C (Refer to the attachment I)
Result	: Complies

Used equipments:

Used	Equipment	Model name	Manufacturer	Serial No.	Next Cal.
<input checked="" type="checkbox"/>	EMC IMMUNITY TEST SYSTEM(SURGE,BURST,DIP)	IMU3000	EMC PARTNER	F5-S6-T6-D-V-1504	2021.11.03

Measurement Data:

- Uncertainty = +/- 5 % (with a 95 % confidence level, k = 2)

“It has been demonstrated that the Voltage dips generator meets the specified requirements in the standard with at least 95 % confidence.”

- Test result is same both 240 V / 50 Hz and 100 V / 50 Hz.

Test Level %Ut	Voltage droop and interruptions %Ut	Duration of Reduction (period)	Result	Remarks
80	20	250	A	No reaction recognized
70	30	25	A	
40	60	10	A	
0	100	250	B	EUT was powered off during the test, but self-recovered after completion of the test

APPENDIX

Attachment I PERFORMANCE CRITERIA

Performance criterion A

The apparatus shall continue to operate as intended during and after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, either of these may be derived from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.

Performance criterion B

The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed. No change of actual operating state or stored data is allowed. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, either of these may be derived from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.

Performance criterion C

Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operation of the controls.

Criteria of Radiated electromagnetic fields and Conducted disturbances induced by electromagnetic fields are given in the following contents.

For components of CCTV systems, where the status is monitored by observing the TV picture, then deterioration of the picture is allowed at 10 V/m ($U_0 = 140 \text{ dB}\mu\text{V}$) , providing

- a) there is no permanent damage or change to the EUT (e.g. no corruption of memory or changes to programmable settings, etc)
- b) at 3 V/m ($U_0 = 130 \text{ dB}\mu\text{V}$), any deterioration of the picture is so minor that the system could still be used, and
- c) there is no observable deterioration of the picture at 1 V/m ($U_0 = 120 \text{ dB}\mu\text{V}$).

Attachment II

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC.

The factors contributing to uncertainties are test receiver, cable loss, antenna factor calibration, Antenna directivity, antenna factor variation with height, antenna phase center variation, antenna frequency interpolation, measurement distance variation, site imperfection, mismatch, and system repeatability. Based on CISPR 16-4-2, the measurement uncertainty level with a 95 % confidence level was applied.

Conducted emission measurement (with a 95 % confidence level , $k = 2$)		
Shielded Room(#1)	9 kHz to 30 MHz:	2.0 dB
Radiated Emission measurement (with a 95 % confidence level , $k = 2$)		
10 m Chamber	30 MHz: to 1 000 MHz:	4.2 dB
3 m Chamber(#1)	1 000 MHz: to 6 000 MHz:	5.0 dB


Attachment III

PHOTOGRAPHS

NTREE

Radiated disturbances (Maximum emission configuration) – Below 1GHz

[Front]

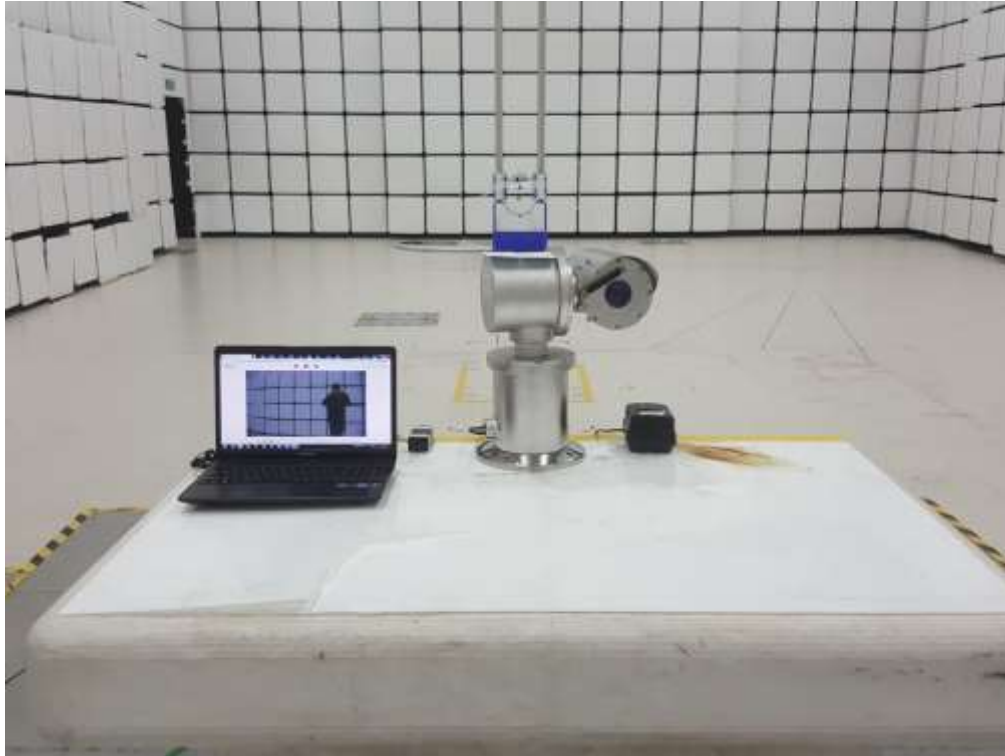


[Rear]



Radiated disturbances (Maximum emission configuration) – Above 1GHz

[Front]

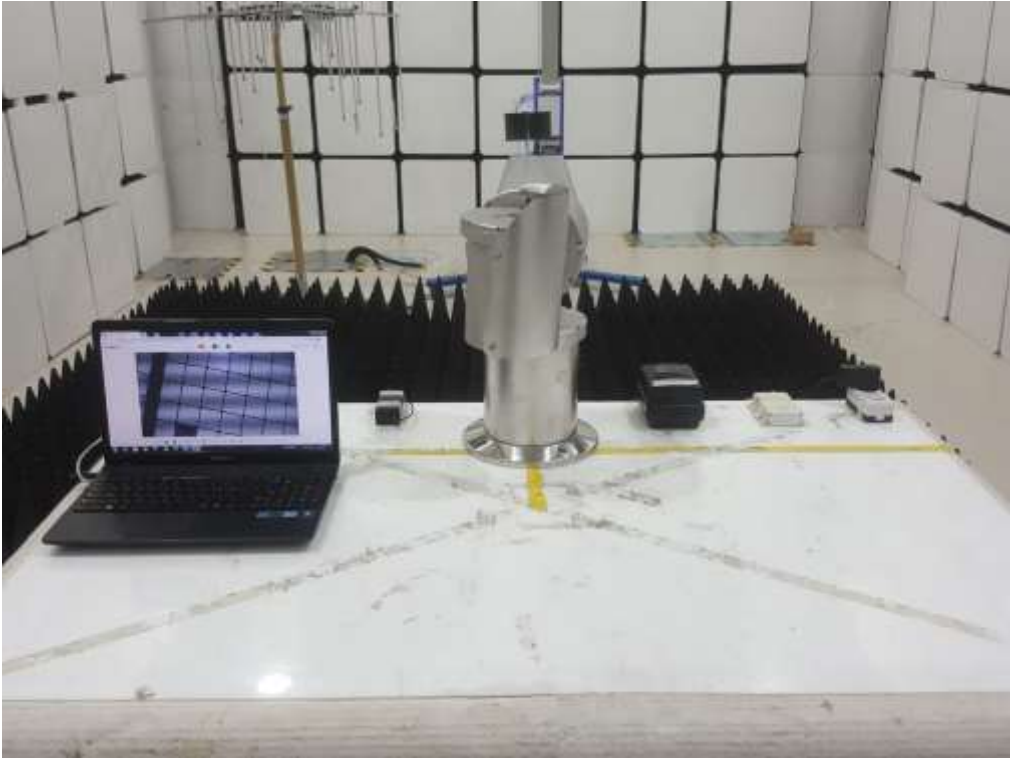

[Rear]



Disturbance Voltage at the mains terminals (Maximum emission configuration)**[Front]****[Rear]**

Disturbance Voltage at the mains terminals (Maximum emission configuration)_ISN**[Front]****[Rear]**

Harmonic




Flicker



Electromagnetic Discharge



RF Electromagnetic Field

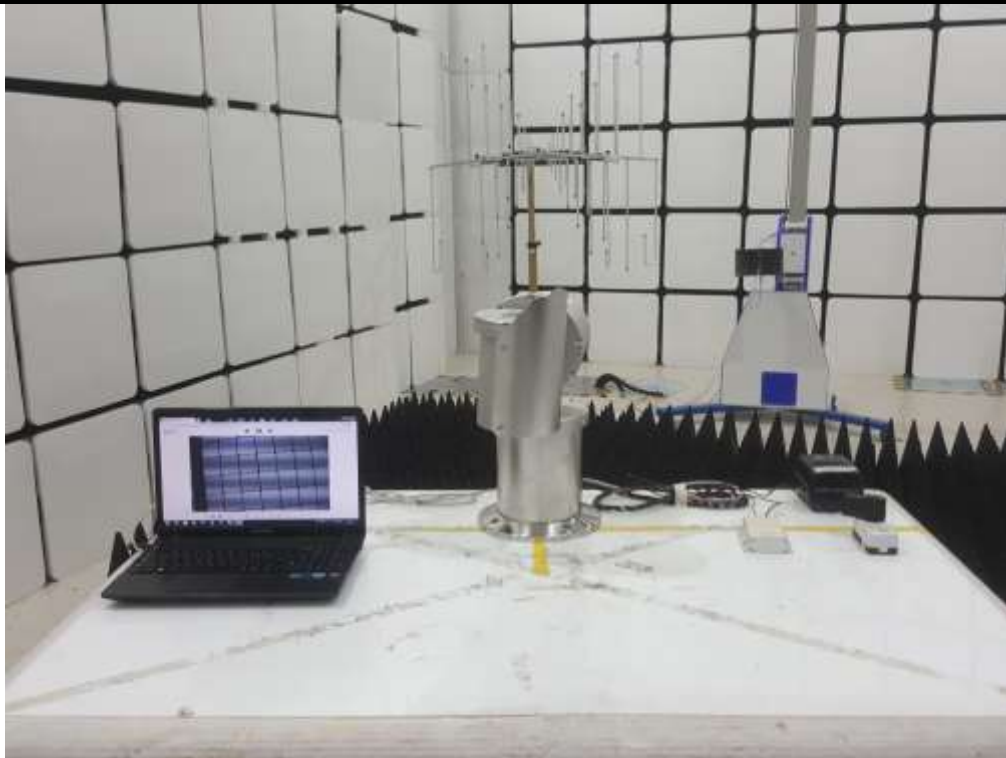

Fast Transients common mode**Fast Transients common mode_Clamp**

Surge



RF current common mode**RF current common mode_Clamp**

Voltage dips and interruption



EUT Photo**Front of EUT****Rear of EUT**

Position of LABEL



Internal of EUT




Top of EXP-M8-WIPERSENSOR V05(160906)



Bottom of EXP-M8-WIPERSENSOR V05(160906)

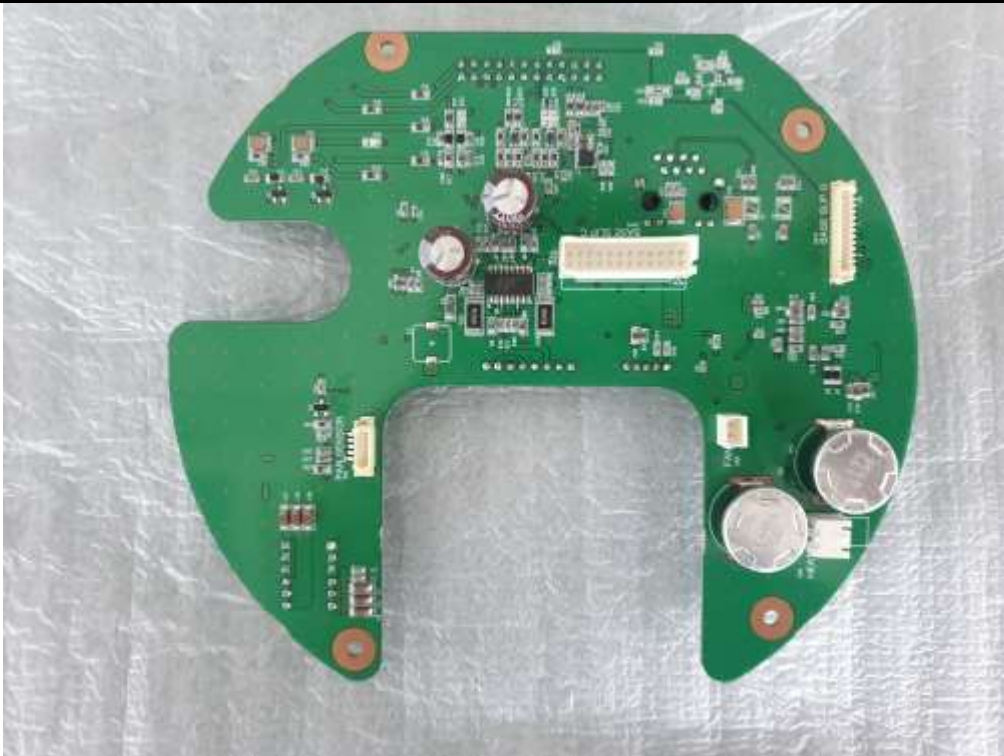


Top of LEXP_BASE_V03(201013)**Bottom of LEXP_BASE_V03(201013)**

Top of LEXP_HTW_CAMERA_V02(200624)



Bottom of LEXP_HTW_CAMERA_V02(200624)

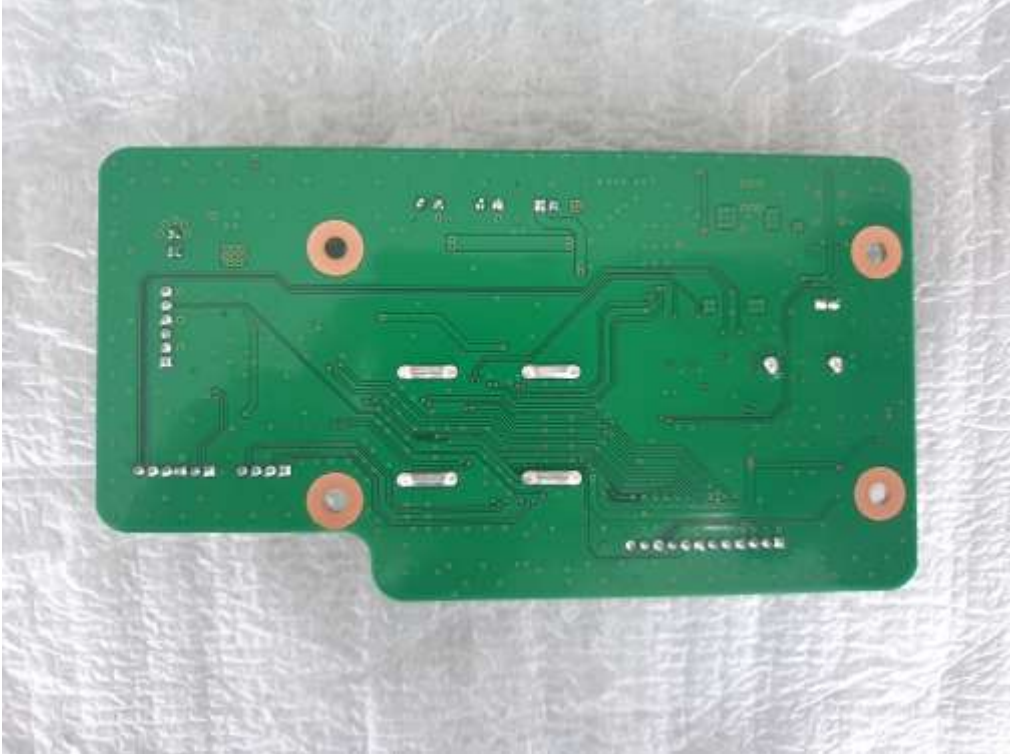

Top of LEXP_MAIN_V04(201106)



Bottom of LEXP_MAIN_V04(201106)





Top of LEXP_PAN_SENSOR_V01(200324)**Bottom of LEXP_PAN_SENSOR_V01(200324)**

Top of LEXP_TILT_SENSOR_V01(200324)



Bottom of LEXP_TILT_SENSOR_V01(200324)

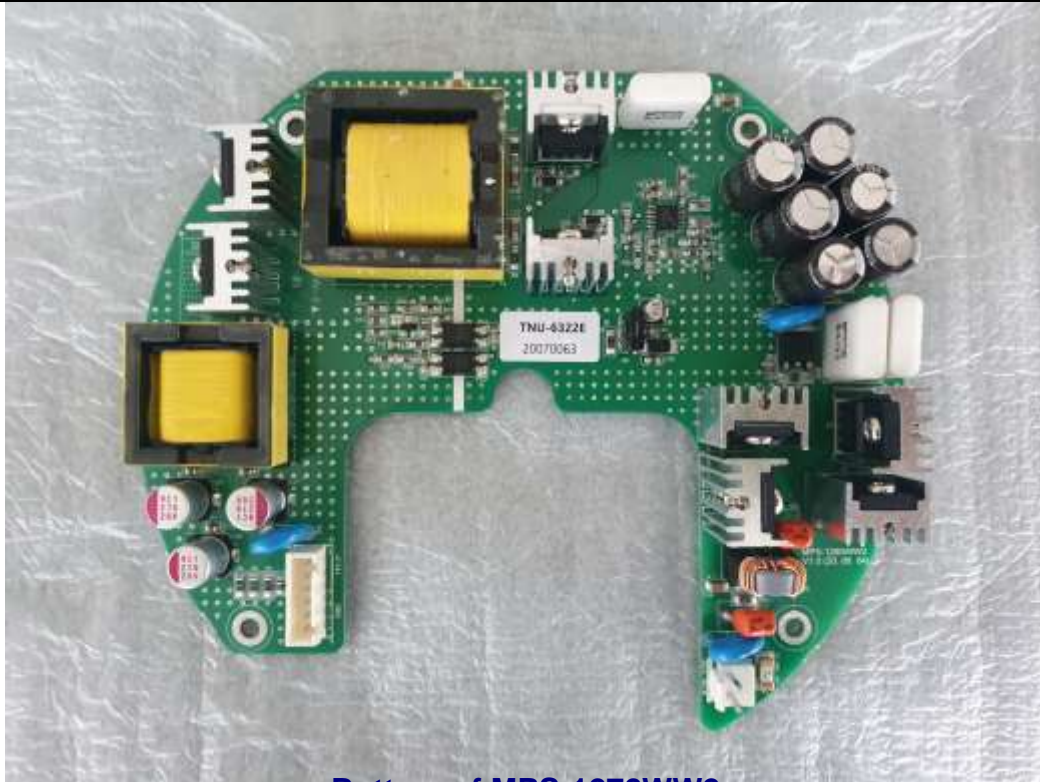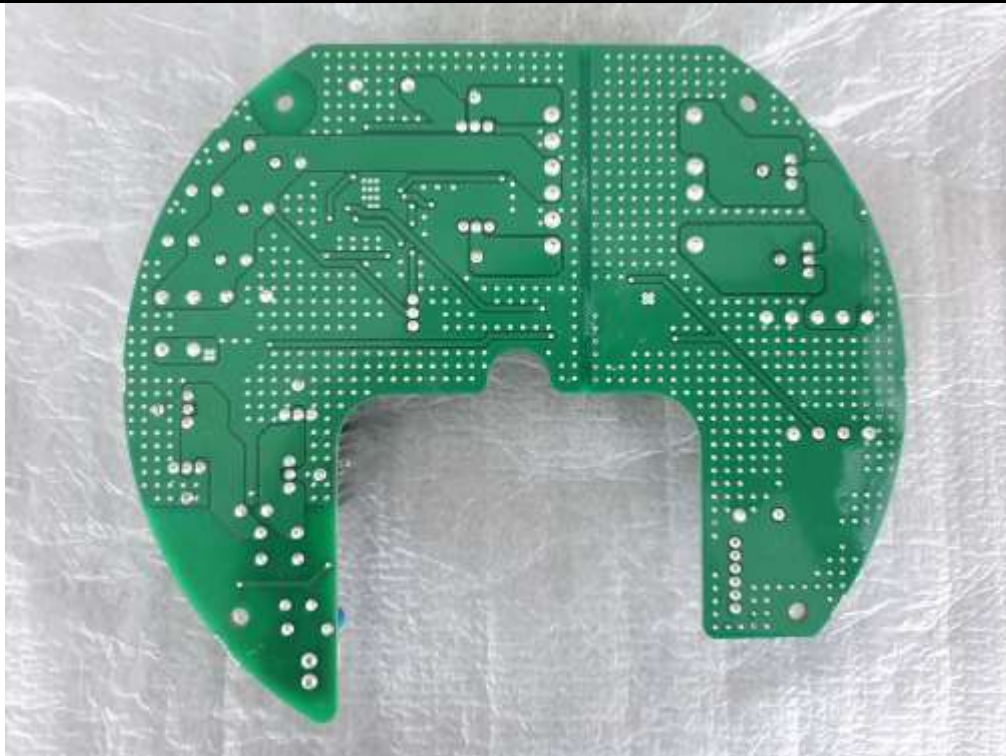

Top of MPS-1272WW2**Bottom of MPS-1272WW2**

CAMERA