

DH-IPC-HFW3849T1-AS-PV-PRO

8MP WizColor TiOC PRO Fixed-focal Bullet WizSense Network Camera



 Xinghan  ACUPICK  TiOC  PRO

Launched by Dahua Technology, WizSense is a series of AI products and solutions that adopt independent AI chip and deep learning algorithm. It focuses on human and vehicle with high accuracy, enabling users to fast act on defined targets. Based on Dahua's advanced technologies, WizSense provides intelligent, simple and inclusive products and solutions.

Series Overview

Dahua WizSense 3 Series Network Camera greatly saves on bandwidth and storage space through its AI Coding technology. Driven by its advanced deep learning algorithms, the camera supports intelligent functions such as perimeter protection, smart motion detection (SMD), Acupick, and AI SSA (AI Scene Self-adaptation), making it easy and convenient to use. Starlight technology and its large aperture lens also allow the camera to produce clear, vivid images even in poor lighting conditions.

Functions

Xinghan Large-Scale AI Models-Vision

Xinghan Large-Scale AI Models-Vision seamlessly expands the storage and operational capacity of algorithmic models through the powerful integration of edge AI model algorithms and NPU computing power. Engineered with a lightweight transformer architecture and enhanced by model distillation and quantization techniques, it optimizes the computing power consumption of ViT operators. This enables the system to collaborate on multiple tasks simultaneously through joint inference between small and large models optimized for edge devices.

WizColor Technology

Dahua WizColor Technology seamlessly combines with the powerful AI-ISP, large pixel size sensor and large aperture in cameras. This unique integration enables cameras to effortlessly capture high-quality images with vibrant colors during nighttime scenarios, ensuring fine details are preserved and minimizing motion blur. Unlike traditional self-illuminating cameras, Dahua WizColor Technology maximizes the utilization of weak light sources, such as moonlight and city lights reflected in the sky, delivering captivating full-color images of the entire scene. It also ensures that monitoring distances are not compromised at night due to limited illumination ranges, facilitating full-color image capture even over long distances.

Siren and Light Active Deterrence

Dahua siren and light active deterrence network camera supports the light alarm and voice alarm when perimeter event occurs, to realize the deterrence and effective intervention. The camera is built in multiple voices for selection, and supports customized voice importing.

- 8-MP 1/1.8" CMOS image sensor, low luminance, and high definition image.
- Outputs max. 8 MP (3840 × 2160) @ 25/30 fps.
- H.265 codec, high compression rate, ultra-low bit rate.
- Built-in multi-core light, the max. IR distance is 50 m and the max. warm light distance is 50 m
- ROI, SMART H.264+/H.265+, AI H.264/H.265, flexible coding, applicable to various bandwidth and storage environments.
- Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking, applicable to various monitoring scenes.
- Intelligent monitoring: Intrusion, tripwire (the two function support the classification and accurate detection of vehicle and human), stay detection, loitering detection, face detection (full image).
- Abnormality detection: Motion detection, privacy masking, scene changing, audio detection, no SD card, SD card full, SD card error, network disconnection, IP conflict, illegal access, and voltage detection.
- Alarm: 1 in, 1 out; audio: 1 in, 1 out; supports max. 512 G Micro SD card; built-in dual MICs; 1-ch speaker; support two-way talk.
- 12 VDC/PoE power supply.
- IP67 protection.
- Sound and light alarm (red and blue lights).
- SMD 4.0.
- Supports AI SSA and one-tap arming and disarming.
- SMD area can be set in warm light areas that support triggering alarms.



SMD 4.0

Dahua Smart Motion Detection technology works with intelligent algorithms to classify targets that trigger motion detection alarms. It filters out objects that are not targets, such as small and large animals, to avoid triggering false alarms. With an AI NVR, Quick Pick technology becomes available, allowing you to easily search for and pick out human and vehicle targets from SMD event videos, prioritizing the highest matches.

AI-ISP

With AI ISP technology, the camera is able to easily adapt to scenes, producing high quality images that reveal the fine details of targets.

Protection (IP67, Wide Voltage)

IP67: The camera passes a series of strict test on dust and soak. It has dust-proof function, and the enclosure can work normally after soaking in 1 m deep water for 30 minutes.

Wide voltage: The camera allows $\pm 30\%$ (for some power supplies) input voltage tolerance (wide voltage range), and it is widely applied to outdoor environment with instable voltage.

| Technical Specification | | | | | | |
|----------------------------|---|---|-----------------------|----------------------|----------------------|--|
| Camera | | | | | | |
| Image Sensor | | 1/1.8" CMOS | | | | |
| Max. Resolution | | 3840 (H) × 2160 (V) | | | | |
| ROM | | 256 MB | | | | |
| RAM | | 1 GB | | | | |
| Scanning System | | Progressive | | | | |
| Electronic Shutter Speed | | Auto/Manual 1/3 s–1/100,000 s | | | | |
| Min. Illumination | | 0.0008 Lux@F1.0 (Color, 30IRE) 0.0004 Lux@F1.0 (B/W, 30IRE) 0 lux (Illuminator on) | | | | |
| S/N Ratio | | >56 dB | | | | |
| Illumination Distance | | Up to 50 m (164.04 ft) (IR) Up to 50 m (164.04 ft) (Warm light) | | | | |
| Illuminator On/Off Control | | Auto;Manual | | | | |
| Illuminator Number | | 4 (Multi-core (IR + warm) light) | | | | |
| Angle Adjustment | | Pan: 0°–360° Tilt: 0°–90° Rotation: 0°–360° | | | | |
| Lens | | | | | | |
| Lens Type | | Fixed-focal | | | | |
| Lens Mount | | M16 | | | | |
| Focal Length | | 2.8 mm;3.6 mm | | | | |
| Max. Aperture | | F1.0 | | | | |
| Field of View | | 2.8 mm: H: 109°; V: 59°; D: 131° 3.6 mm: H: 93°; V: 50°; D: 111° | | | | |
| Iris Control | | Fixed | | | | |
| Close Focus Distance | | 2.8 mm: 3.2 m (10.50 ft) 3.6 mm: 4.4 m (14.44 ft) | | | | |
| DORI Distance | Lens | Detect | Observe | Recognize | Identify | |
| | 2.8 mm | 82.0 m (269.03 ft) | 32.8 m (107.64 ft) | 16.4 m (53.81 ft) | 8.2 m (26.90 ft) | |
| | 3.6 mm | 100.0 m (328.08 ft) | 40.2 m (131.23 ft) | 20.0 m (65.62 ft) | 10.0 m (32.81 ft) | |
| | *DORI (Detect, Observe, Recognize, Identify) is a standard system (EN-62676-4) for defining the ability of a person viewing the video to distinguish persons or objects within a covered area. The numbers in this table do not reflect intelligent function distances. For intelligent function distances, refer to installation and commissioning manual/project design tool. | | | | | |
| Intelligence | | | | | | |
| IVS (Perimeter Protection) | | Intrusion, tripwire (the two functions support the classification and accurate detection of vehicle and human), stay detection, loitering detection. | | | | |
| Face Detection(Full Image) | | Face detection; snapshot; snapshot optimization; optimal face snapshot upload; face enhancement; face snapshot set as face or one-inch photo; snapshot strategies (real-time snapshot, quality priority and optimization snapshot); face angle filter; optimization time setting. | | | | |
| SMD | | SMD 4.0 | | | | |
| Smart Search | | Work together with Smart NVR to perform refine intelligent search, event extraction and merging to event videos | | | | |

| | |
|-----------------------------|---|
| AcuPick | Uses deep learning algorithms and works with back-end devices to accurately match targets, such as people and motor vehicles, and search through live and recorded videos to quickly locate targets. |
| AI SSA | Adopt deep learning algorithms to adjust the parameters of the image to suit the conditions. |
| Video | |
| Video Compression | H.265; H.264; H.264H; H.264B; MJPEG (only supported by sub stream) |
| AI Coding | AI H.265; AI H.264 *Includes smart codec technology, Smart H.265+ and Smart H.264+ |
| Video Frame Rate | Main stream: 3840 × 2160@(1 fps–25/30 fps) Sub stream: 1920 × 1080@(1 fps–25/30 fps) Third stream: 1920 × 1080@(1 fps–25/30 fps) *The values above are the max. frame rates of each stream; for multiple streams, the values will be subjected to the total encoding capacity. |
| Stream Capability | 3 streams |
| Resolution | 8M (3840 × 2160); 6M (3200 × 1800); 5M (3072 × 1728); 4M (2688 × 1520/2560 × 1440); 3M (2304 × 1296); 1080p (1920 × 1080); 720p (1280 × 720); D1 (704 × 576/704 × 480); VGA (640 × 480); CIF (352 × 288/352 × 240) |
| Bit Rate Control | VBR; CBR; ABR |
| Video Bit Rate | H.264: 3 kbps–16384 kbps H.265: 3 kbps–16384 kbps |
| Day/Night | Auto(ICR)/Color/B/W |
| BLC | Yes |
| HLC | Yes |
| WDR | 120 dB |
| Scene Self-adaptation (SSA) | Yes |
| White Balance | Auto; natural; street lamp; outdoor; manual; regional custom |
| Gain Control | Auto/Manual |
| Noise Reduction | 3D NR |
| Motion Detection | OFF/ON (4 areas, rectangular) |
| Region of Interest (RoI) | Yes (4 areas) |
| Smart Illumination | Yes |
| Smart Dual Light | Yes |
| Defog | Yes |
| Image Rotation | 0°/90°/180°/270° (Support 90°/270° with 2688 × 1520 resolution and lower) |
| Mirror | Yes |
| Privacy Masking | 8 areas |
| LDC | Yes |
| Audio | |
| Built-in MIC | Yes, built-in dual Mic |
| Built-in Speaker | Yes, built-in speaker |
| Audio Compression | PCM; G.711a; G.711Mu; G.726; G.723 |

Alarm

| | |
|-------------|--|
| Alarm Event | No SD card; SD card full; SD card error; network disconnection; IP conflict; illegal access; motion detection; video tampering; tripwire; intrusion; stay detection; loitering detection; face detection (full image); scene changing; audio detection; voltage detection; SMD; security exception |
|-------------|--|

Network

| | |
|---------------------|---|
| Network Port | RJ-45 (10/100 Base-T) |
| SDK and API | Yes |
| Network Protocol | IPv4; IPv6; HTTP; TCP; UDP; ARP; RTP; RTSP; RTCP; RTMP; SMTP; FTP; SFTP; DHCP; DNS; DDNS; QoS; UPnP; NTP; Multicast; ICMP; IGMP; NFS; SAMBA; PPPoE; SNMP; P2P; Bonjour; Auto Registration |
| Interoperability | ONVIF (Profile S & Profile G & Profile T & Profile M); CGI |
| User/Host | 20 (Total bandwidth: 64 M) |
| Storage | FTP;SFTP; Micro SD card (support max. 512 GB); NAS |
| Browser | IE: IE11 Chrome Firefox |
| Management Software | Smart PSS Lite; DSS; DMSS; DoLink Care |
| Mobile Client | iOS;Android |
| Security | Digest; WSSE; Account lockout; Security logs; IP/MAC filtering; Generation and importing of X.509 certification; Syslog; HTTPS; 802.1x; Trusted boot; Trusted execution; Trusted upgrade |

Certification

| | |
|----------------|---|
| Certifications | CE-LVD: EN 62368-1; CE-EMC: Electromagnetic Compatibility Directive 2014/30/EU |
|----------------|---|

Port

| | |
|--------------|---|
| Audio Input | 1 channel (RCA port) |
| Audio Output | 1 channel (RCA port) |
| Alarm Input | 1 channel in: wet contact, 5 mA 3–5 VDC |
| Alarm Output | 1 channel out: wet contact, 300 mA 12 VDC |

Power

| | |
|-------------------|---|
| Power Supply | 12 VDC/PoE+ (802.3at) |
| Dual Power Backup | When the power adapter and PoE provide power at the same time, disconnect one of them. The device will continue to work, but will not restart. |
| Power Consumption | Basic: 4.3 W (12 VDC); 6.2 W (PoE) Max. (H.265+WDR+ warm light+siren and light active deterrence + intelligence on): 11.8 W (12 VDC); 15.1 W (PoE) |

Environment

| | |
|-----------------------|--------------------------------------|
| Operating Temperature | –40 °C to +60 °C (–40 °F to +140 °F) |
| Operating Humidity | ≤95% (RH), non-condensing |
| Protection | IP67 |
| Storage Temperature | –40 °C to +60 °C (–40 °F to +140 °F) |

| | |
|------------------|---------------------------|
| Storage Humidity | ≤95% (RH), non-condensing |
|------------------|---------------------------|

Structure

| | |
|--------------------|--|
| Casing Material | Metal + plastic |
| Product Dimensions | 288.4 mm × 94.4 mm × 84.7 mm (11.35" × 3.72" × 3.33") (L × W × H) |
| Net Weight | 1.0 kg (2.20 lb) |
| Gross Weight | 1.3 kg (2.87 lb) |

Ordering Information

| Type | Model | Description |
|------------------------|----------------------------|--|
| 8MP Camera | DH-IPC-HFW3849T1-AS-PV-PRO | 8MP WizColor TiOC PRO Fixed-focal Bullet WizSense Network Camera |
| | PFA135 | Junction Box |
| Accessories (Optional) | PFA130-E | Water-proof Junction Box |
| | PFA152-E | Pole Mount Bracket |
| | PFM320D-EN | 12 VDC 2A Power Adapter |
| | PFM900-E | Integrated Mount Tester |
| | TF-P100 | MicroSD Memory Card |

Accessories

Optional:



PFA135
Junction Box



PFA130-E
Water-proof Junction Box



PFA152-E
Pole Mount Bracket




PFM320D-EN
12 VDC 2A Power Adapter



PFM900-E
Integrated Mount Tester



TF-P100
Integrated Mount Tester

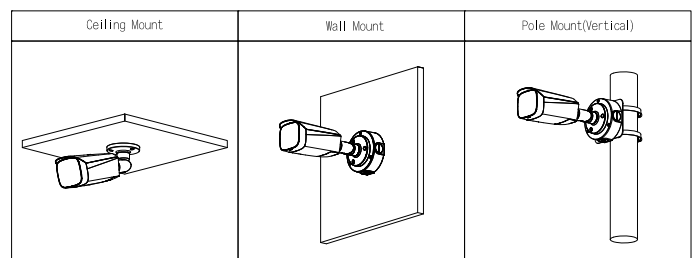

Dimensions (mm[inch])

