



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0019-R1
Page (1) of (78)

EMC TEST REPORT For CE

Test Report No. : KES-EM-22T0019-R1
Date of Issue : Feb. 17, 2022
Product name : NETWORK CAMERA
Model/Type No. : PNM-9085RQZ
Variant Model : PNM-9085RQZ1
Applicant : Hanwha Techwin Co., Ltd.
Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, Republic of Korea
Manufacturer : 1. HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.
2. D-TECH CO.,LTD.
Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended area,
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam
2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do,
Korea (Suwon Industrial Complex)
Date of Receipt : Dec. 22, 2021
Test date : Dec. 28, 2021 ~ Dec. 31, 2021
Test Results : **In Compliance** **Not in Compliance**

Tested by

Kang Hyeon, Kim
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0019-R1
Page (2) of (78)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Jan. 07, 2022	KES-EM-22T0019	Issued
Feb. 17, 2022	KES-EM-22T0019-R1	Reissuance due to the addition of a derivative

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



TABLE OF CONTENTS

1.0	General Product Description	4
1.1	Test Voltage & Frequency	6
1.2	Variant Model Differences.....	6
1.3	Device Modifications	6
1.4	Equipment Under Test.....	6
1.5	Support Equipments	6
1.6	External I/O Cabling	7
1.7	EUT Operating Mode(s)	8
1.8	Configuration.....	9
1.9	Remarks when standards applied	10
1.10	Calibration Details of Equipment Used for Measurement	10
1.11	Test Facility	10
1.12	Laboratory Accreditations and Listings	10
2.0	Test Regulations.....	11
2.1	Conducted Emissions at Mains Power Ports	12
2.2	Conducted Emissions at Telecommunication Ports	13
2.3	Radiated Electric Field Emissions(Below 1 GHz)	14
2.4	Radiated Electric Field Emissions(Above 1 GHz)	15
2.5	Harmonic Current Emissions	16
2.6	Voltage Fluctuations and Flicker	17
3.0	Criteria for compliance.....	18
3.1	Electrostatic Discharge.....	20
3.2	Radiated Electric Field Immunity	24
3.3	Electrical Fast Transients/Bursts	27
3.4	Surge Transients	30
3.5	Conducted Disturbance	34
3.6	Voltage Dips and Short Interruptions	38
APPENDIX A – TEST DATA.....		41
Conducted Emissions at Mains Power Ports.....		41
Conducted Emissions at Telecommunication Ports		45
Radiated Electric Field Emissions(Below 1 GHz)		47
Radiated Electric Field Emissions(Above 1 GHz).....		49
Harmonic Current Emissions and Voltage Fluctuations and Flicker		51
Test Setup Photos and Configuration		56
Conducted Emissions at Mains Power Ports.....		56
Conducted Emissions at Telecommunication Ports		58
Radiated Electric Field Emissions(Below 1 GHz)		60
Radiated Electric Field Emissions(Above 1 GHz).....		62
Harmonic Current Emissions and Voltage Fluctuations and Flicker		64
Electrostatic Discharge		65
Radiated Electric Field Immunity		66
Electrical Fast Transients/Bursts		67
Surge Transients.....		68
Conducted Disturbance.....		69
Voltage Dips and Short Interruptions.....		70
EUT External Photographs.....		71
EUT Internal Photographs		72

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



1.0 General Product Description

Main Specifications of EUT are:

Video	
Imaging Device	1/1.8" 5MP CMOS: each CH
Effective Pixels	2616(H)x1976(V): each CH
Min. Illumination	Color: 0.11lux(F1.6,30 IRE) BW: 0Lux(IR LED on)
Lens	
Focal Length (Zoom Ratio)	4.13~9.4mm(2.3x)motorized varifocal
Max. Aperture Ratio	F1.92(Wide)~F2.67(Tele)
Angular Field of View	H: 87.58°(Wide)~37.34°(Tele) / V: 64.58°(Wide)~28.04°(Tele) / D: 112.46°(Wide)~46.85°(Tele)
Min. Object Distance	1.2m
Focus Control	Simple focus
Pan / Tilt / Rotate	
Pan / Tilt / Rotate Range	Remote adjustment (Max. 200cycles) 0~360° / 30~90° / 0~90°
Operational	
IR Viewable Length	30m
Camera Title	Displayed up to 85 characters
Day & Night	Auto(ICR)
Backlight Compensation	BLC, HLC, WDR, SDR
Wide Dynamic Range	120dB
Digital Noise Reduction	SSNRV
Digital Image Stabilization	Support
Defog	Support
Motion Detection	8ea, 8point polygonal zones
Privacy Masking	32ea, polygonal zones - Color: Grey, Green, Red, Blue, Black, White - Mosaic
Gain Control	Low / Middle / High
White Balance	ATW / AWC / Manual / Indoor / Outdoor
LDC	Support
Electronic Shutter Speed	Minimum / Maximum / Anti flicker (2~1/12,000sec)
Video Rotation	Flip, Mirror, Hallway view(90°/270°)
Analytics	Defocus detection, Directional detection, Fog detection, Face detection, Motion detection, Appear/Disappear, Enter/Exit, Loitering, Tampering, Virtual line, Audio detection
Alarm I/O	Input 1ea / Output 1ea
Alarm Triggers	Analytics, Network disconnect, Alarm input
Alarm Events	File upload via FTP and e-mail Notification via e-mail SD/SDHC/SDXC or at event triggers Alarm output Handover
Audio In	Selectable(mic in/line in) Supply voltage: 2.5VDC(4mA), Input impedance: 2K Ohm
Audio Out	Line out, Max.output level: 1Vrms

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
 Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
 Tel: +82-31-425-6200 / Fax: +82-31-424-0450
 www.kes.co.kr

Report No.:
 KES-EM-22T0019-R1
 Page (5) of (78)

Network	
Ethernet	RJ-45(10/100/1000BASE-T)
Video Compression	H.265/H.264: Main/Baseline/High, MJPEG
Resolution	2560x1920, 2560x1440, 1920x1080, 1600x1200, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360, 320x240
Max. Framerate	H.265/H.264 : Max. 30fps/25fps(60Hz/50Hz) MJPEG: Max. 30fps/25fps(60Hz/50Hz)
Smart Codec	Manual(5ea area), WiseStreamII
Bitrate Control	H.264/H.265: CBR or VBR MJPEG: VBR
Streaming	Unicast(20 users) / Multicast Multiple streaming(Up to 10 profiles)
Audio Compression	G.711 u-law /G.726 Selectable G.726(ADPCM) 8KHz, G.711 8KHz G.726: 16Kbps, 24Kbps, 32Kbps, 40Kbps AAC-LC: 48Kbps at 16KHz
Protocol	IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP,RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP, Bonjour, LLDP
Security	HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access log 802.1X Authentication(EAP-TLS, EAP-LEAP)
Edge Storage	Micro SD/SDHC/SDXC 4slot 256GB(Each CH)
Application Programming Interface	ONVIF Profile S/T SUNAPI(HTTP API) Wisenet open platform
Web Viewer	Supported OS: Windows 7, 8.1, 10, Mac OS X 10.13 Recommended Browser: Google Chrome Supported Browser: MS Explore11, MS Edge, Mozilla Firefox(Window 64bit only), Apple Safari(Mac OS X only)
Memory	5GB RAM, 1280MB Flash
Environmental	
Operating Temperature / Humidity	-40°C~+55°C(-40°F~+131°F) / Less than 90% RH
Storage Temperature / Humidity	-50°C~+60°C(-58°F~+140°F) / Less than 90% RH
Certification	IP66, IK10, NEMA4X
Electrical	
Input Voltage	HPoE, 12VDC
Power Consumption	Max : 45W Typical : 32W
Mechanical	
Color / Material	White / Aluminum
RAL Code	RAL9003
Product dimensions / weight	φ315x145.9mm / 5.2kg

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

AC 230 V, 50 Hz

1.2 Variant Model Differences

Adding derivatives due to the deletion of GYRO SENSOR.

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
NETWORK CAMERA	PNM-9085RQZ	-	HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.	EUT
PoE INJECTOR	PT-PSE109GBRO-AH	PT2138221217	Dongguan PROCET Network Technology Co.,Ltd	EUT

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
AC/DC Adaptor	2ACB022F	-	Channel Well Technology Co., Ltd.	-
Notebook	HSN-Q07C	5CD8367KND	HP	-
Notebook Adaptor	HSTNN-CA40	WFTKU0ERLB4Q CH	HP	-
MIC	MP1000	-	-	-
Speaker	BR1000A Cuve Black 2	-	DONGGUAN EDIFIER TECHNOLOGY Co., Ltd	-
Alarm	PRO-SL	-	SENSOR PRO	-
Button Alarm	-	-	-	-
Micro SD Card	-	-	Sandisk	8 GB
Smart Phone	-	-	Apple	-



1.6 External I/O Cabling

■ AC/DC Adaptor Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (EUT)	DC 2Pin	AC/DC Adaptor	DC 2Pin	1.3	U
	RJ-45 (LAN)	Notebook	RJ-45 (LAN)	4.0	S
	3.5 mm	MIC	3.5 mm	2.0	U
	3.5 mm	Speaker	3.5 mm	1.5	U
	Alarm IN	Alarm	Alarm OUT	3.5	U
	Alarm OUT	Button Alarm	Alarm IN	3.0	U
	Card Slot	Micro SD Card	Card Slot	-	-
Notebook	3.5 mm	Smart Phone	3.5 mm	2.0	U
	DC Jack	Notebook Adaptor	DC Jack	1.5	U

* Unshielded=U, Shielded=S

■ PoE Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (EUT)	RJ-45 (PoE)	PoE INJECTOR (EUT)	RJ-45 (PoE)	2.8	S
	3.5 mm	MIC	3.5 mm	2.0	U
	3.5 mm	Speaker	3.5 mm	1.5	U
	Alarm IN	Alarm	Alarm OUT	3.5	U
	Alarm OUT	Button Alarm	Alarm IN	3.0	U
	Card Slot	Micro SD Card	Card Slot	-	-
Notebook	RJ-45 (LAN)	PoE INJECTOR (EUT)	RJ-45 (LAN)	3.0	S
	3.5 mm	Smart Phone	3.5 mm	2.0	U
	DC Jack	Notebook Adaptor	DC Jack	1.5	U

* Unshielded=U, Shielded=S

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0019-R1
Page (8) of (78)

1.7 EUT Operating Mode(s)

operating
EUT Monitoring, Ping Test


EUT Test operating S/W		
Name	Version	Manufacture Company
Web Viewer	-	Hanwha Techwin Co., Ltd.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr


1.8 Configuration

■ AC Main
 □ DC Main

■ AC/DC Adaptor Mode

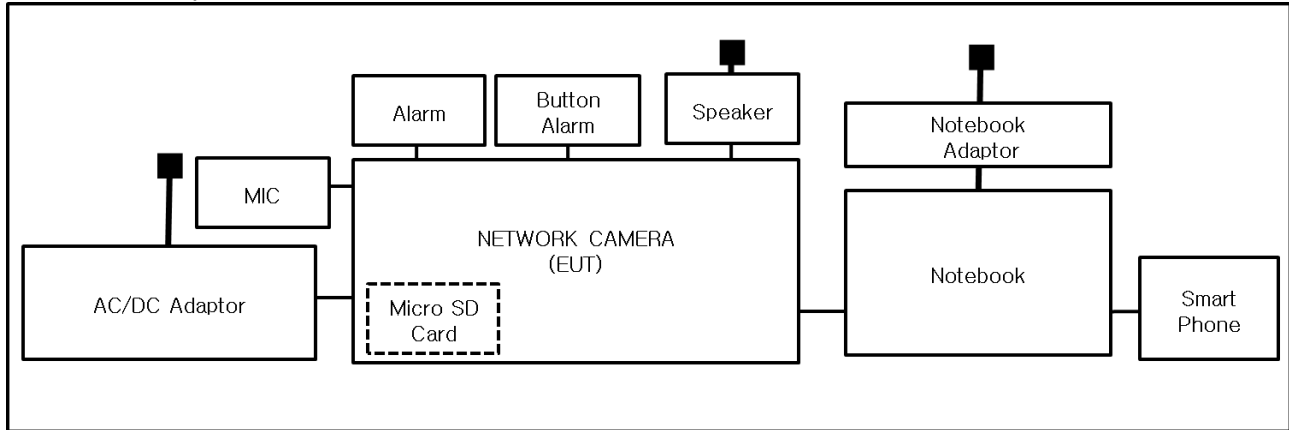

■ PoE Mode

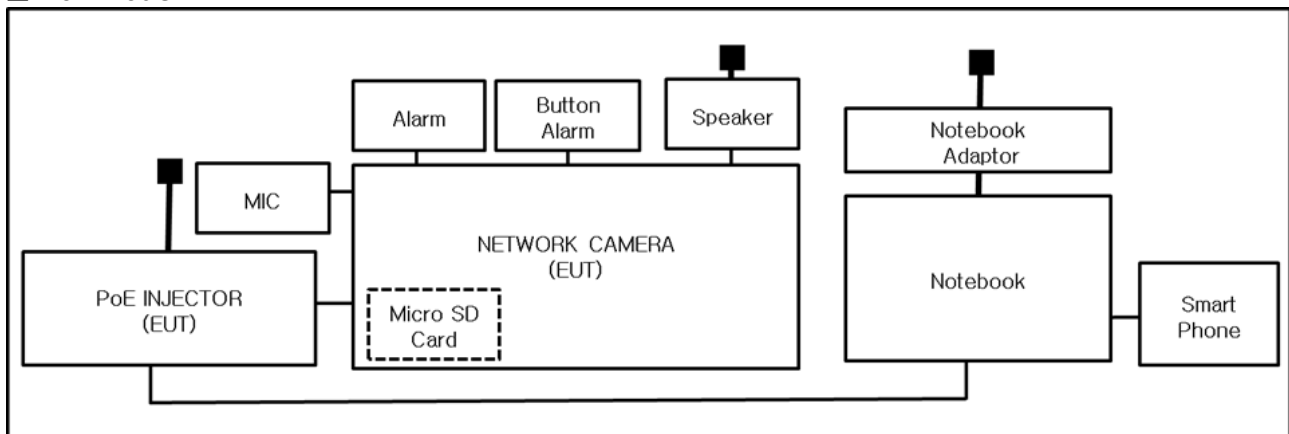

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

1.9 Remarks when standards applied

N/A







1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.11 Test Facility

The measurement facility is located at 473-21 Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber , 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber , and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber, 10 m Open Area and Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298-1
JAPAN	VCCI	Mains Ports Conducted Interference Measurement, Telecommunication Ports Conducted Disturbance Measurement and Radiation 10 meter site, Facility for measuring radiated disturbance above 1 GHz	 R-20056, C-20036, T-20040, G-20057
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber , 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0004

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

2.0 Test Regulations

The emissions tests were performed according to following regulations:

- EMC – Directive 2014/30/EU**
- EMC – Regulations 2016/1091**

- EN 55032:2015/A11:2020
- BS EN 55032:2015/A11:2020

- Class A
- Class A

- Class B
- Class B

- EN 50130-4:2011
- BS EN 50130-4:2011/A1:2014

- EN 61000-3-2:2014
- BS EN 61000-3-2:2014

- EN 61000-3-3:2013
- BS EN 61000-3-3:2013



2.1 Conducted Emissions at Mains Power Ports

Test Date

Dec. 28, 2021

Test Location

Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test S/W	EMC32	R & S	9.12.00	-
<input checked="" type="checkbox"/>	EMI TEST RECEIVER	ESU26	R & S	100517	08, 05, 2022
<input checked="" type="checkbox"/>	LISN	ENV216	R & S	101786	01, 19, 2022
<input checked="" type="checkbox"/>	LISN	ENV216	R & S	101137	01, 19, 2022

Test Conditions

Temperature: (22,6 ± 0,4) °C

Relative Humidity: (43,2 ± 0,4) % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- PASS
- NOT PASS
- NOT APPLICABLE

Remarks

See Appendix A for test data.

2.2 Conducted Emissions at Telecommunication Ports

Test Date

Dec. 28, 2021

Test Location

Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test S/W	EMC32	R & S	9.12.00	-
<input checked="" type="checkbox"/>	EMI TEST RECEIVER	ESU26	R & S	100517	08, 05, 2022
<input checked="" type="checkbox"/>	LISN	ENV216	R & S	101786	01, 19, 2022
<input checked="" type="checkbox"/>	LISN	ENV216	R & S	101137	01, 19, 2022
<input type="checkbox"/>	8-WIRE ISN CAT3	CAT3 8158	SCHWARZBECK	8158-0019	03, 10, 2022
<input type="checkbox"/>	8-WIRE ISN CAT6	NTFM 8158	SCHWARZBECK	8158-0029	03, 10, 2022
<input checked="" type="checkbox"/>	ISN	ISN S8	SCHWARZBECK	ISN-S8-0019	03, 10, 2022

Test Conditions

Temperature: (22,9 ± 0,3) °C
Relative Humidity: (43,4 ± 0,3) % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- PASS
- NOT PASS
- NOT APPLICABLE

Remarks

- See Appendix A for test data.
- For Ethernet interfaces, measurements are required at the highest data rate supported by the interface.

2.3 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Dec. 28, 2021

Test Location OPEN AREA TEST SITE #2 SEMI ANECHOIC CHAMBER #4(10m)**Test Equipment**

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
<input checked="" type="checkbox"/>	EMI TEST RECEIVER	ESU26	R & S	100551	04, 01, 2022
<input checked="" type="checkbox"/>	AMPLIFIER	SCU 01	R & S	100603	11, 24, 2022
<input checked="" type="checkbox"/>	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	715	12, 08, 2022
<input checked="" type="checkbox"/>	ATTENUATOR	8491A	HP	32173	03, 10, 2022

Test Conditions

Temperature: (22,0 ± 0,4) °C

Relative Humidity: (43,5 ± 0,3) % R.H.

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

- PASS
 NOT PASS
 NOT APPLICABLE

RemarksSee Appendix A for test data.



2.4 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Dec. 28, 2021

Test Location

SEMI ANECHOIC CHAMBER #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
<input checked="" type="checkbox"/>	EMI TEST RECEIVER	ESR7	R & S	101190	08, 03, 2022
<input checked="" type="checkbox"/>	PREAMPLIFIER	8449B	AGILENT	3008A01967	04, 07, 2022
<input type="checkbox"/>	ATTENUATOR	8491A	HP	35496	03, 10, 2022
<input checked="" type="checkbox"/>	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	03, 11, 2022

Test Conditions

Temperature: (22,2 ± 0,3) °C

Relative Humidity: (43,1 ± 0,3) % R.H.

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- PASS
- NOT PASS
- NOT APPLICABLE

Remarks

See Appendix A for test data.



2.5 Harmonic Current Emissions

Test Date

Dec. 28, 2021

Test Location

Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test S/W	net.control	EM TEST	2.1.4	-
<input checked="" type="checkbox"/>	DIGITAL POWER ANALYZER	DPA 500N	EM TEST	V1024106759	04, 06, 2022
<input checked="" type="checkbox"/>	POWER SOURCE	ACS 500N6	EM TEST	V1024106760	-

Test Conditions

Temperature: (22,8 ± 0,2) °C

Relative Humidity: (43,1 ± 0,2) % R.H.

Classification of Equipment for Harmonic Current Emissions

- Class A
- Class B
- Class C(Below 25 W)
- Class C(Above 25 W)
- Class D

Test Results

The requirements are:

- PASS
- NOT PASS
- NOT APPLICABLE

Remarks

See Appendix A for test data.



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0019-R1
Page (17) of (78)

2.6 Voltage Fluctuations and Flicker

Test Date

Dec. 28, 2021

Test Location

Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test S/W	net.control	EM TEST	2.1.4	-
<input checked="" type="checkbox"/>	DIGITAL POWER ANALYZER	DPA 500N	EM TEST	V1024106759	04, 06, 2022
<input checked="" type="checkbox"/>	POWER SOURCE	ACS 500N6	EM TEST	V1024106760	-

Test Conditions

Temperature: (23,0 ± 1,2) °C
Relative Humidity: (43,4 ± 1,1) % R.H.

Test Results

The requirements are:

- PASS
 NOT PASS
 NOT APPLICABLE

Remarks

See Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

3.0 Criteria for compliance

Criteria for compliance was based on the following guidelines:
EN 50130-4:2011 / BS EN 50130-4:2011/A1:2014 Alarm systems-Part 4: Electromagnetic compatibility Product family standard: Immunity requirements for components of fire, intruder and social alarm systems

The variety and the diversity of the apparatus within the scope of this document makes it difficult to define precise criteria for the evaluation of the immunity test results.

If as a result of the application of the tests defined in this standard, the apparatus becomes dangerous or unsafe then the apparatus shall be deemed to have failed the test.

A functional description and a definition of performance by the manufacture and noted in the test

report, based on the following criteria:

Electrostatic discharge

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the application of discharge is permissible, providing that is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

Radiated electromagnetic fields

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the application of discharge is permissible, providing which could be interpreted by associated equipment as a change, and no such
Flickering of indicators occurs at a field strength of 3 V/m.
For components of CCTV systems, where the picture is allowed at 10 V/m, providing.

(a) there is no permanent damage or change to EUT

(e.g. no corruption of memory or changes to programmable setting etc.)

(b) at 3 V/m, any deterioration of the picture is so minor that the system could still be used;
and

(c) there is no observable deterioration of the picture at 1 V/m.



Fast transient burst / slow high energy voltage surge

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the application of discharge is permissible, providing
That there is no residual is permissible, providing that there is no residual change in the EUT or
any
change in outputs, which could be interpreted by associated equipment as a change.

Conducted RF immunity

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the application of discharge is permissible, providing
That there is no residual is permissible, providing that there is no residual change in the EUT or
any
change in outputs, which could be interpreted by associated equipment as a change,
and no such flickering of indicators oeuvres at $U = 130 \text{ dB}\mu\text{V}$.
For component of CCTV systems, where the status is monitored by observing the TV picture,
then deterioration of the picture is allowed at $U = 140 \text{ dB}\mu\text{V}$, providing:
(a) there is no permanent damage or change to the EUT
(e.g. no corruption of memory or changes to programmable settings etc.)
(b) at $U = 130 \text{ dB}\mu\text{V}$, any deterioration of the picture is so minor that the system could
still be used; and
(c) there in no observable deterioration of the picture at $U = 120 \text{ dB}\mu\text{V}$.

Voltage dip/interruption / Voltage variation

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the conditioning is permissible, providing that there is no
residual
change in the EUT or any change in outputs, which could be interpreted by associated
equipment
as a change. The EUT shall meet the acceptance criteria for the functional test, after the
conditioning.



3.1 Electrostatic Discharge

Reference Standard

EN 61000-4-2:2009
BS EN 61000-4-2:2009

Test Date

Dec. 29, 2021

Test Location

EMS-ESD: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	ESD SIMULATOR	ESS-2000	Noise Ken	ESS01Z0454	02, 01, 2022
<input checked="" type="checkbox"/>	HCP	-	KES	-	-
<input checked="" type="checkbox"/>	VCP	-	Noise Ken	-	-

Test Conditions

Temperature: (22,7 ± 0,3) °C
Relative Humidity: (43,5 ± 0,2) % R.H.
Atmospheric Pressure: (100,2 ± 0,0) kPa

Test Specifications

Discharge Factor: ≥ 1 s
Discharge Impedance: 330 ohm / 150 pF
Kind of Discharge: Air, Contact (direct and indirect)
Polarity: Positive and Negative
Number of Discharge: 10 at all locations for Air discharge
10 at all locations for Contact discharge


Discharge Voltage:	Contact	Air	HCP	VCP
	<input type="checkbox"/> 2 kV	<input checked="" type="checkbox"/> 2 kV	<input type="checkbox"/> 2 kV	<input type="checkbox"/> 2 kV
	<input type="checkbox"/> 4 kV	<input checked="" type="checkbox"/> 4 kV	<input type="checkbox"/> 4 kV	<input type="checkbox"/> 4 kV
	<input checked="" type="checkbox"/> 6 kV	<input type="checkbox"/> 6 kV	<input checked="" type="checkbox"/> 6 kV	<input checked="" type="checkbox"/> 6 kV
	<input type="checkbox"/> 8 kV	<input checked="" type="checkbox"/> 8 kV	<input type="checkbox"/> 8 kV	<input type="checkbox"/> 8 kV
	<input type="checkbox"/> 15 kV	<input type="checkbox"/> 15 kV	<input type="checkbox"/> 15 kV	<input type="checkbox"/> 15 kV

Notes: HCP: Horizontal coupling plane
VCP: Vertical coupling plane


Required Performance Criteria: Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Location of Discharge:





■ AC/DC Adaptor Mode

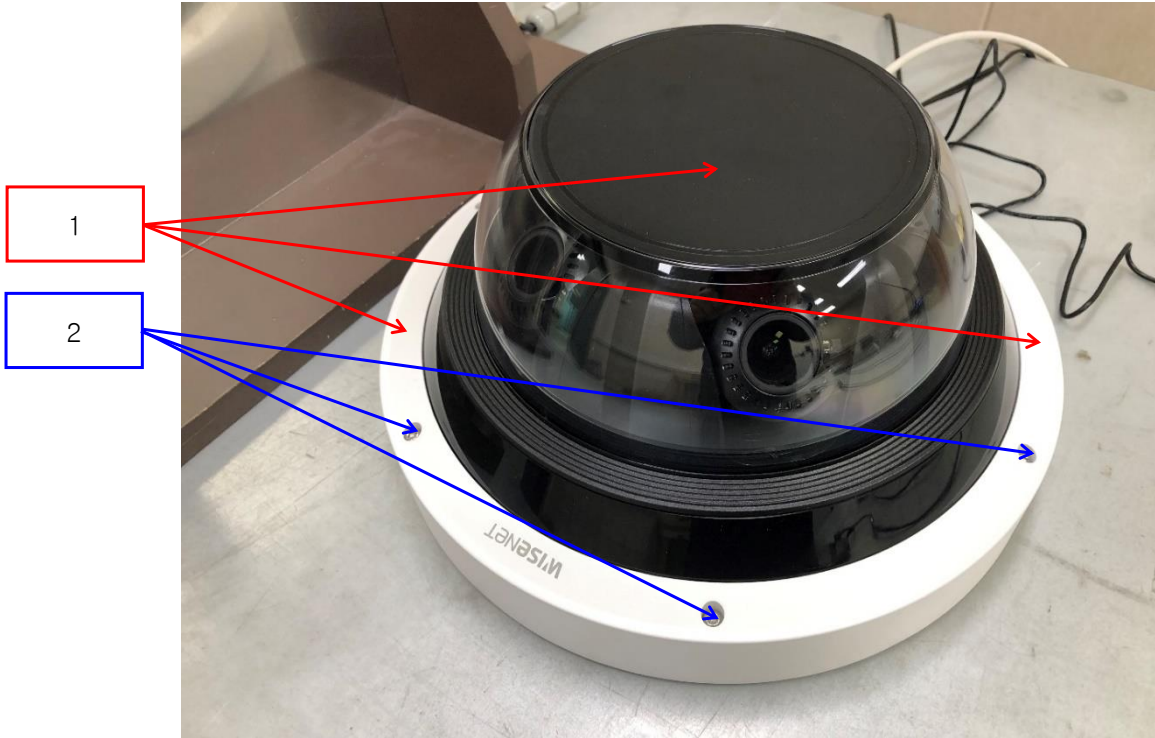

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

■ PoE Mode

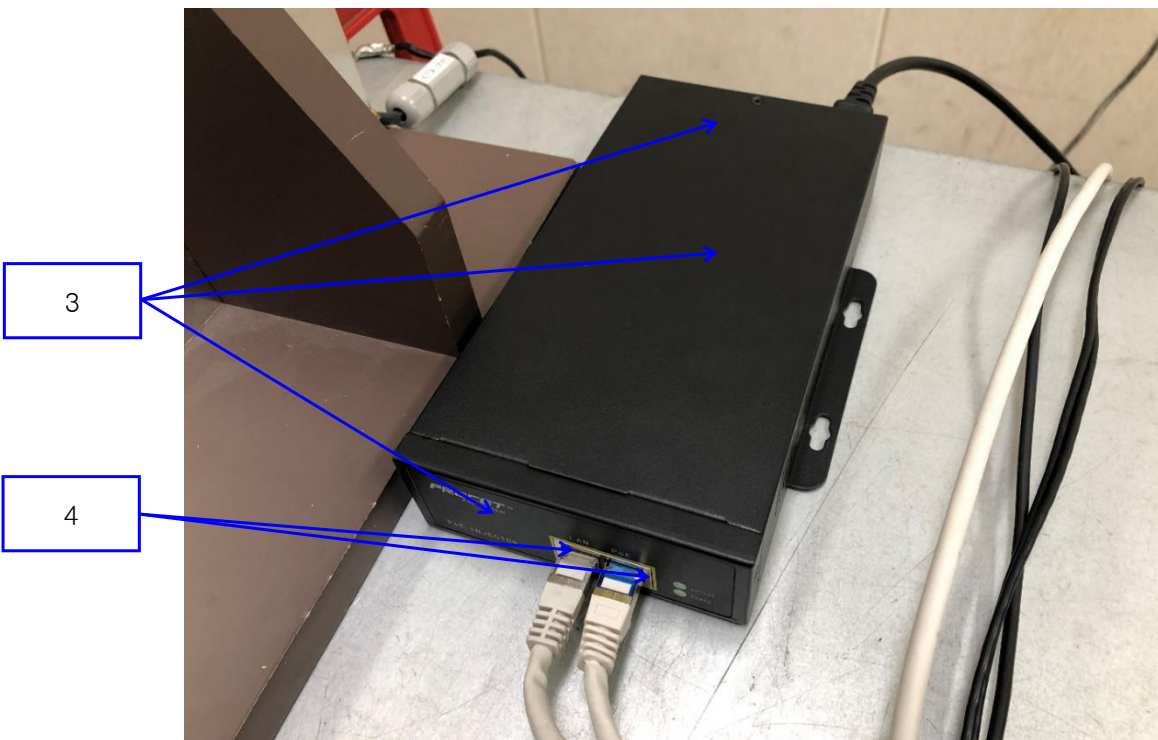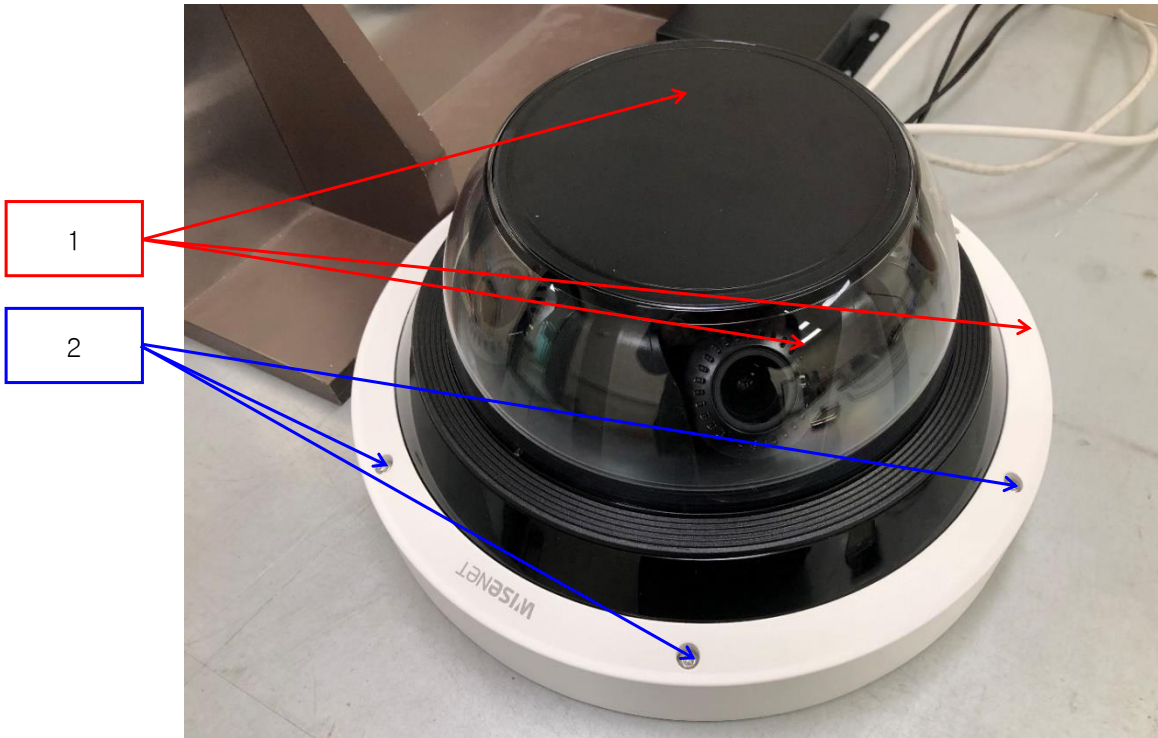

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



Test Data

■ AC/DC Adaptor Mode

Indirect Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	HCP Contact	Contact Discharge	Complied	-
2	VCP Contact	Contact Discharge	Complied	-

Direct Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	Enclosure	Air Discharge	Complied	-
2	Screw	Contact Discharge	Complied	-

■ PoE Mode

Indirect Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	HCP Contact	Contact Discharge	Complied	-
2	VCP Contact	Contact Discharge	Complied	-

Direct Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	Enclosure	Air Discharge	Complied	-
2	Screw	Contact Discharge	Complied	-
3	PoE Enclosure	Contact Discharge	Complied	-
4	Port	Contact Discharge	Complied	-

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- PASS Required Performance Criteria
- NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria

3.2 Radiated Electric Field Immunity

Reference Standard

EN 61000-4-3:2006 +A2:2010
 BS EN 61000-4-3:2006 +A2:2010

Test Date

Dec. 31, 2021

Test Location

EMS-RS: SEMI ANECHOIC CHAMBER #2 SEMI ANECHOIC CHAMBER #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMS Test S/W	EMC32	R & S	10.10.02	-
<input checked="" type="checkbox"/>	SIGNAL GENERATOR	SMB 100A	Rohde & Schwarz	108252	08, 03, 2022
<input checked="" type="checkbox"/>	HIGH POWER DUAL AMP	SSA532	SUNGSAN	SSA532-001	-
<input checked="" type="checkbox"/>	POWER METER	E4419B	Agilent	GB40203000	04, 01, 2022
<input checked="" type="checkbox"/>	CW POWER SENSOR	E4412A	Agilent	US38488240	04, 01, 2022
<input checked="" type="checkbox"/>	CW POWER SENSOR	E4412A	Agilent	MY41501662	04, 01, 2022
<input checked="" type="checkbox"/>	STACKED DOUBLE LOG-PER- ANTENNA	STPL9128 E	Schwarzbeck	9128ES-121	-
<input checked="" type="checkbox"/>	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	03, 11, 2022

Test Conditions

Temperature: (22,3 ± 1,4) °C
 Relative Humidity: (43,2 ± 1,2) % R.H.
 Atmospheric Pressure: (100,5 ± 0,0) kPa

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0019-R1
Page (25) of (78)

Test Specifications

Antenna Polarization: Horizontal & vertical unless indicated otherwise

Antenna Distance: 3 m

Field Strength: 1 V/m 3 V/m
 10 V/m

Frequency Range: 80 MHz to 1 GHz 1,4 GHz to 2,7 GHz
 80 MHz to 2,7 GHz

Modulation: AM, 80 %, 1 kHz sine wave
 PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step: 1 % step

Dwell Time: 1 s 3 s

of Sides Radiated: 4

Required Performance Criteria: Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



Test Data

■ AC/DC Adaptor Mode

Side Exposed	Observations	
	Horizontal	Vertical
Front	Complied	Complied
Right	Complied	Complied
Back	Complied	Complied
Left	Complied	Complied

■ PoE Mode

Side Exposed	Observations	
	Horizontal	Vertical
Front	Complied	Complied
Right	Complied	Complied
Back	Complied	Complied
Left	Complied	Complied

Note: "Blank" = Not performed

Observations:
Complied – No degradation of function

Test Results

- PASS Required Performance Criteria
- NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

3.3 Electrical Fast Transients/Bursts

Reference Standard

EN 61000-4-4:2012
 BS EN 61000-4-4:2012

Test Date

Dec. 29, 2021

Test Location

EMS-EFT: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMS Test S/W	iec.control	EM TEST	5.4.8	-
<input checked="" type="checkbox"/>	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	12, 03, 2022
<input checked="" type="checkbox"/>	MOTOR VARIAC	MV2616	EM TEST	P1552169719	04, 01, 2022
<input checked="" type="checkbox"/>	CAPACITIVE COUPLING CLAMP	HFK	EM TEST	P1633183115	12, 03, 2022

Test Conditions

Temperature: (22,7 ± 0,5) °C
 Relative Humidity: (43,5 ± 0,4) % R.H.
 Atmospheric Pressure: (100,2 ± 0,0) kPa

Test Specifications

Pulse Amplitude & Polarity:
 (AC Power Lines) ± 1.0 kV ± 2.0 kV
 ± 4.0 kV

Pulse Amplitude & Polarity:
 (Other supply / Signal Lines) ± 0.5 kV ± 1.0 kV
 ± 2.0 kV

Burst Period: 300 ms 2 s

Repetition Rate: 5 kHz 100 kHz

Duration of Test Voltage: ≥ 1 min

Required Performance Criteria: Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr



Test Data

■ AC/DC Adaptor Mode

Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
L	Complied	Complied
N	Complied	Complied
PE	-	-
L – N	Complied	Complied
L – PE	-	-
N – PE	-	-
L – N – PE	-	-

Input d.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
RJ-45 (LAN)	Complied	Complied
Alarm	Complied	Complied
Button Alarm	Complied	Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0019-R1
Page (29) of (78)

■ PoE Mode

Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
L	Complied	Complied
N	Complied	Complied
PE	Complied	Complied
L – N	Complied	Complied
L – PE	Complied	Complied
N – PE	Complied	Complied
L – N – PE	Complied	Complied

Input d.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
RJ-45 (LAN)	Complied	Complied
Alarm	Complied	Complied
Button Alarm	Complied	Complied

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- PASS Required Performance Criteria
- NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0019-R1
Page (30) of (78)

3.4 Surge Transients

Reference Standard

EN 61000-4-5:2014
BS EN 61000-4-5:2014

Test Date

Dec. 29, 2021

Test Location

EMS-EFT: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMS Test S/W	iec.control	EM TEST	5.4.8	-
<input checked="" type="checkbox"/>	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	12, 03, 2022
<input checked="" type="checkbox"/>	MOTOR VARIAC	MV2616	EM TEST	P1552169719	04, 01, 2022
<input checked="" type="checkbox"/>	CDN	CNV 508N1	EM TEST	P1610176296	12, 03, 2022

Test Conditions

Temperature: (22,9 ± 0,9) °C
Relative Humidity: (43,8 ± 0,9) % R.H.
Atmospheric Pressure: (100,2 ± 0,0) kPa

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



Test Specifications

AC Power Lines

Source Impedance: 12 ohm for common Mode and 2 ohm for differential Mode

Surge Amplitude : Common Mode
 (0,5 / 1,0 / 2,0) kV
Differential Mode
 (0,5 / 1,0) kV

Number of Surges: 5 surges per angle

Angle: 0°, 90°, 180°, 270° (input a.c. power port)

Polarity: Positive & Negative

Repetition Rate: 1 surge per min 1 surge per 30 sec.

Required Performance Criteria: Complied

Other supply / Signal Lines

Source Impedance: 42 ohm for common Mode

Surge Amplitude: Common Mode
 (0,5 / 1,0) kV

Number of Surges: 5 Surges

Polarity: Positive & Negative

Repetition Rate: 1 surge per min 1 surge per 30 sec.

Required Performance Criteria: Complied



Test Data

- AC/DC Adaptor Mode
- Line to Line – Differential Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L – N	Complied	Complied

- Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L – PE	-	-
N – PE	-	-

Signal Lines

- Line to Earth – Common Mode

Mode of Application	Coupling Method	Observations	
		(+) Surge (kV)	(-) Surge (kV)
RJ-45 (LAN)	CDN	Complied	Complied
	LINE	Complied	Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
 Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
 Tel: +82-31-425-6200 / Fax: +82-31-424-0450
 www.kes.co.kr

Report No.:
 KES-EM-22T0019-R1
 Page (33) of (78)

■ PoE Mode

Line to Line – Differential Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L – N	Complied	Complied

Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L – PE	Complied	Complied
N – PE	Complied	Complied

Signal Lines

Line to Earth – Common Mode

Mode of Application	Coupling Method	Observations	
		(+) Surge (kV)	(-) Surge (kV)
RJ-45 (LAN)	CDN	Complied	Complied
	LINE	Complied	Complied

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- PASS Required Performance Criteria
- NOT PASS Required Performance Criteria
- NOT APPLICABLE

Remarks

PASS Required Performance Criteria

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

3.5 Conducted Disturbance

Reference Standard

EN 61000-4-6:2014
 BS EN 61000-4-6:2014

Test Date

Dec. 30, 2021

Test Location

EMS-CS: Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMS Test S/W	icd.control	EM TEST	5.3.12	-
<input checked="" type="checkbox"/>	CONTINUOUS WAVE SIMULATOR	CWS 500N1.4	EM TEST	P1602169880	11, 24, 2022
<input checked="" type="checkbox"/>	ATTENUATOR	ATT 6/80	EM TEST	P1614178148	11, 24, 2022
<input checked="" type="checkbox"/>	CDN	CDN M016	TESEQ	43694	11, 24, 2022
<input checked="" type="checkbox"/>	CDN	CDN M016	TESEQ	43697	11, 24, 2022
<input checked="" type="checkbox"/>	CDN	CDN ST08A	TESEQ	43886	11, 24, 2022
<input checked="" type="checkbox"/>	EM CLAMP	KEMZ 801A	TESEQ	44099	11, 25, 2022

Test Conditions

Temperature: (22,5 ± 0,9) °C
 Relative Humidity: (43,1 ± 0,9) % R.H.
 Atmospheric Pressure: (100,6 ± 0,0) kPa

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0019-R1
Page (35) of (78)

Test Specifications

- Frequency range: 150 kHz to 100 MHz 150 kHz to 80 MHz
- Voltage Level: 1 Vrms 3 Vrms
 10 Vrms
- Modulation: AM, 80 %, 1 kHz sine wave
 PM, 1 Hz (0,5 s ON : 0,5 s OFF)
- Frequency step: 1 % step
- Dwell Time: 1 s 3 s
- Required Performance Criteria: Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



Test Data

■ AC/DC Adaptor Mode

Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
L - N	CDN	Complied

Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	-	-

Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observations
RJ-45 (LAN)	CDN	Complied
Alarm	Clamp	Complied
Button Alarm	Clamp	Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0019-R1
Page (37) of (78)

■ PoE Mode

Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
L - N - PE	CDN	Complied

Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	-	-

Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observations
RJ-45 (LAN)	CDN	Complied
Alarm	Clamp	Complied
Button Alarm	Clamp	Complied

Notes: CDN = Coupling Decoupling Network
"blank" = Not performed

Observations:
Complied - No degradation of function

Test Results

PASS Required Performance Criteria
 NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

3.6 Voltage Dips and Short Interruptions

Reference Standard

EN 61000-4-11:2004

BS EN 61000-4-11:2004

Test Date

Dec. 29, 2021

Test Location

EMS-Voltage dip: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMS Test S/W	iec.control	EM TEST	5.4.8	-
<input checked="" type="checkbox"/>	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	04, 01, 2022
<input checked="" type="checkbox"/>	MOTOR VARIAC	MV2616	EM TEST	P1552169719	04, 01, 2022

Test Conditions

Temperature: (22,6 ± 0,3) °C

Relative Humidity: (43,8 ± 0,2) % R.H.

Atmospheric Pressure: (100,2 ± 0,0) kPa



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0019-R1
Page (39) of (78)

Test Specifications & Observations/Remarks

■ AC/DC Adaptor Mode

- Voltage Dips and Short Interruptions

<u>Test Level</u>	<u>Duration [in period/ms (50 Hz)]</u>	<u>Results</u>
<input checked="" type="checkbox"/> 20 % dip	<input checked="" type="checkbox"/> 250 / 5 000	<u>Complied</u>
<input checked="" type="checkbox"/> 30 % dip	<input checked="" type="checkbox"/> 25 / 500	<u>Complied</u>
<input checked="" type="checkbox"/> 60 % dip	<input checked="" type="checkbox"/> 10 / 200	<u>Complied</u>
<input checked="" type="checkbox"/> 100 % dip	<input checked="" type="checkbox"/> 250 / 5 000	<u>Degradation</u>

- Voltage variations

<input checked="" type="checkbox"/> Unom + 10 %	<input checked="" type="checkbox"/> 253.0 V (ac)	<u>Complied</u>
<input checked="" type="checkbox"/> Unom - 15 %	<input checked="" type="checkbox"/> 195.5 V (ac)	<u>Complied</u>

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0019-R1
Page (40) of (78)

■ PoE Mode

- Voltage Dips and Short Interruptions

<u>Test Level</u>	<u>Duration [in period/ms (50 Hz)]</u>	<u>Results</u>
<input checked="" type="checkbox"/> 20 % dip	<input checked="" type="checkbox"/> 250 / 5 000	<u>Complied</u>
<input checked="" type="checkbox"/> 30 % dip	<input checked="" type="checkbox"/> 25 / 500	<u>Complied</u>
<input checked="" type="checkbox"/> 60 % dip	<input checked="" type="checkbox"/> 10 / 200	<u>Complied</u>
<input checked="" type="checkbox"/> 100 % dip	<input checked="" type="checkbox"/> 250 / 5 000	<u>Degradation</u>

- Voltage variations

<input checked="" type="checkbox"/> Unom + 10 %	<input checked="" type="checkbox"/> 253.0 V (ac)	<u>Complied</u>
<input checked="" type="checkbox"/> Unom - 15 %	<input checked="" type="checkbox"/> 195.5 V (ac)	<u>Complied</u>

Observations:

Complied – No degradation of function

Degradation - See "Remarks "

Test Results

- PASS Required Performance Criteria
- NOT PASS Required Performance Criteria
- NOT APPLICABLE

Remarks

During the test(100%, 250cycle), EUT was turned off but after the test, it was recovered by no operator's intervention.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

APPENDIX A – TEST DATA


Conducted Emissions at Mains Power Ports

■ AC/DC Adaptor Mode

[HOT]

Common Information

Test Description:	Conducted Emission
Model No.:	PNM-9085RQZ
Mode	DC CE
Operator Name:	KES

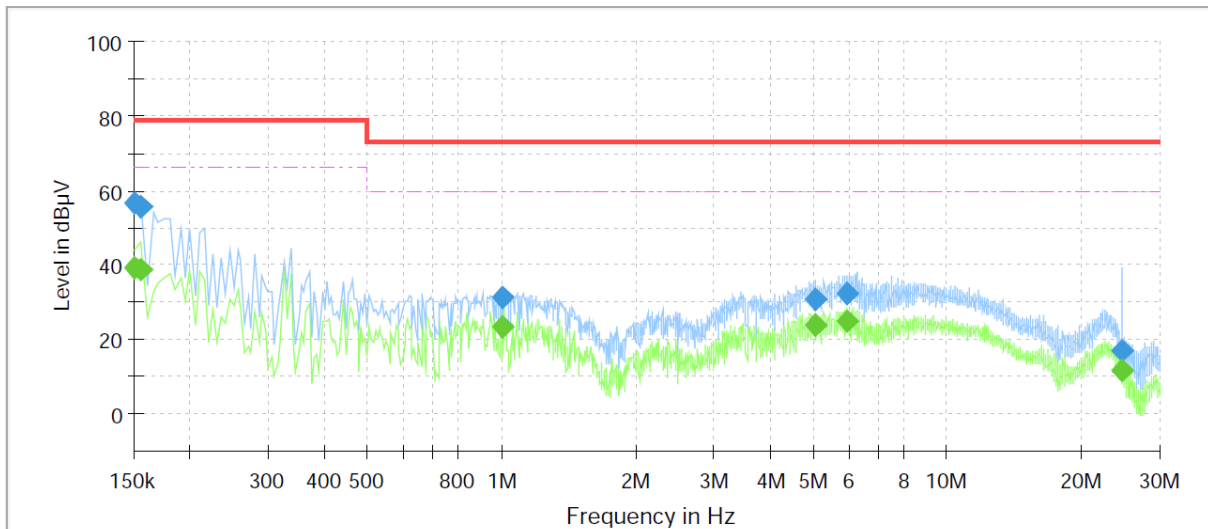

Final Result


Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.150000	---	38.99	66.00	27.01	1000.0	9.000	L1	9.6
0.150000	56.85	---	79.00	22.15	1000.0	9.000	L1	9.6
0.155000	---	38.45	66.00	27.55	1000.0	9.000	L1	9.6
0.155000	55.52	---	79.00	23.48	1000.0	9.000	L1	9.6
1.000000	---	23.09	60.00	36.91	1000.0	9.000	L1	9.9
1.000000	31.11	---	73.00	41.89	1000.0	9.000	L1	9.9
5.060000	---	23.74	60.00	36.26	1000.0	9.000	L1	9.9
5.060000	30.67	---	73.00	42.33	1000.0	9.000	L1	9.9
5.940000	---	25.12	60.00	34.88	1000.0	9.000	L1	9.9
5.940000	32.32	---	73.00	40.68	1000.0	9.000	L1	9.9
24.595000	---	11.53	60.00	48.47	1000.0	9.000	L1	9.9
24.595000	17.06	---	73.00	55.94	1000.0	9.000	L1	9.9

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

[NEUTRAL]

Common Information

Test Description:	Conducted Emission
Model No.:	PNM-9085RQZ
Mode	DC CE
Operator Name:	KES

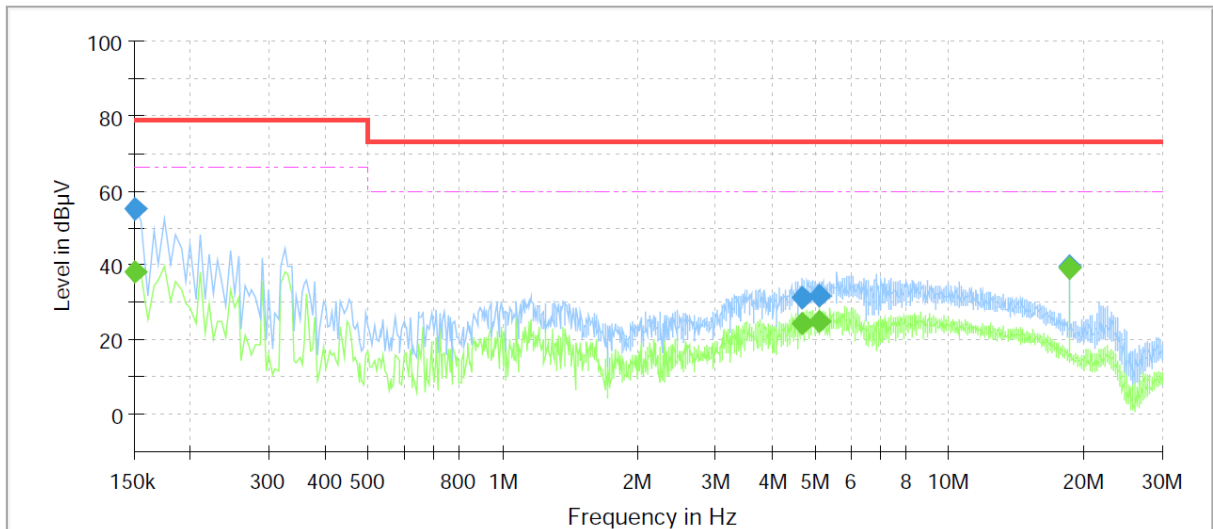

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.150000	---	38.06	66.00	27.94	1000.0	9.000	N	9.5
0.150000	54.84	---	79.00	24.16	1000.0	9.000	N	9.5
4.685000	---	24.53	60.00	35.47	1000.0	9.000	N	9.9
4.685000	31.33	---	73.00	41.67	1000.0	9.000	N	9.9
5.115000	---	24.93	60.00	35.07	1000.0	9.000	N	9.9
5.115000	31.90	---	73.00	41.10	1000.0	9.000	N	9.9
18.500000	---	39.27	60.00	20.73	1000.0	9.000	N	10.0
18.500000	39.68	---	73.00	33.32	1000.0	9.000	N	10.0

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr




■ PoE Mode

[HOT]

Common Information

Test Description:	Conducted Emission
Model No.:	PNM-9085RQZ
Mode	PoE CE
Operator Name:	KES

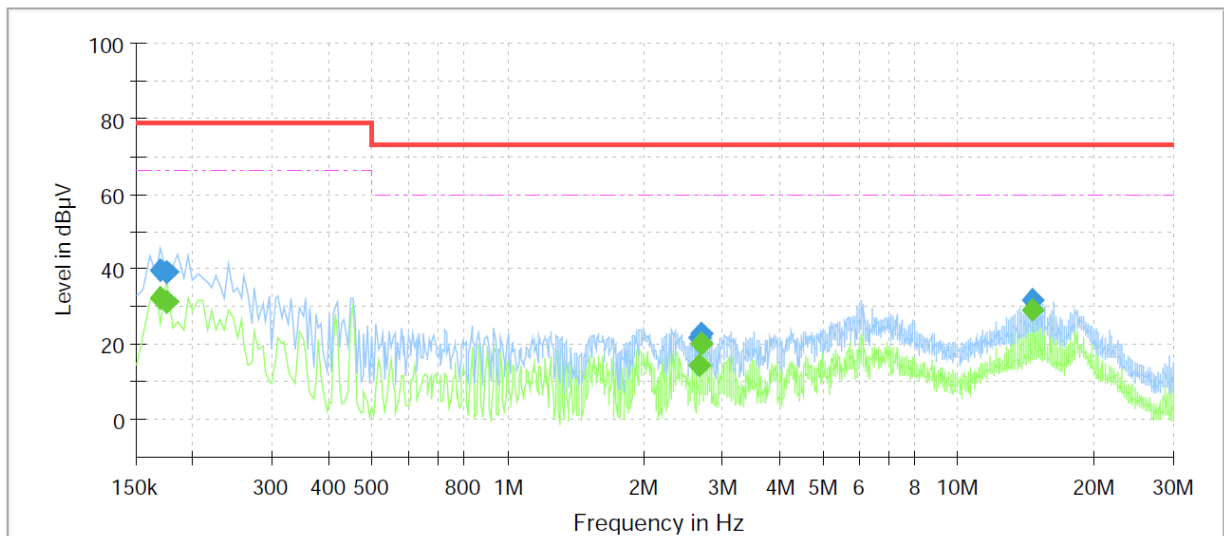

Final Result


Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.170000	---	32.40	66.00	33.60	1000.0	9.000	L1	9.6
0.170000	39.61	---	79.00	39.39	1000.0	9.000	L1	9.6
0.175000	---	31.34	66.00	34.66	1000.0	9.000	L1	9.6
0.175000	39.02	---	79.00	39.98	1000.0	9.000	L1	9.6
2.655000	---	14.27	60.00	45.73	1000.0	9.000	L1	10.1
2.655000	21.82	---	73.00	51.18	1000.0	9.000	L1	10.1
2.695000	---	20.15	60.00	39.85	1000.0	9.000	L1	10.1
2.695000	22.74	---	73.00	50.26	1000.0	9.000	L1	10.1
14.535000	---	29.17	60.00	30.83	1000.0	9.000	L1	9.9
14.535000	31.62	---	73.00	41.38	1000.0	9.000	L1	9.9

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

[NEUTRAL]

Common Information

Test Description:	Conducted Emission
Model No.:	PNM-9085RQZ
Mode	PoE CE
Operator Name:	KES

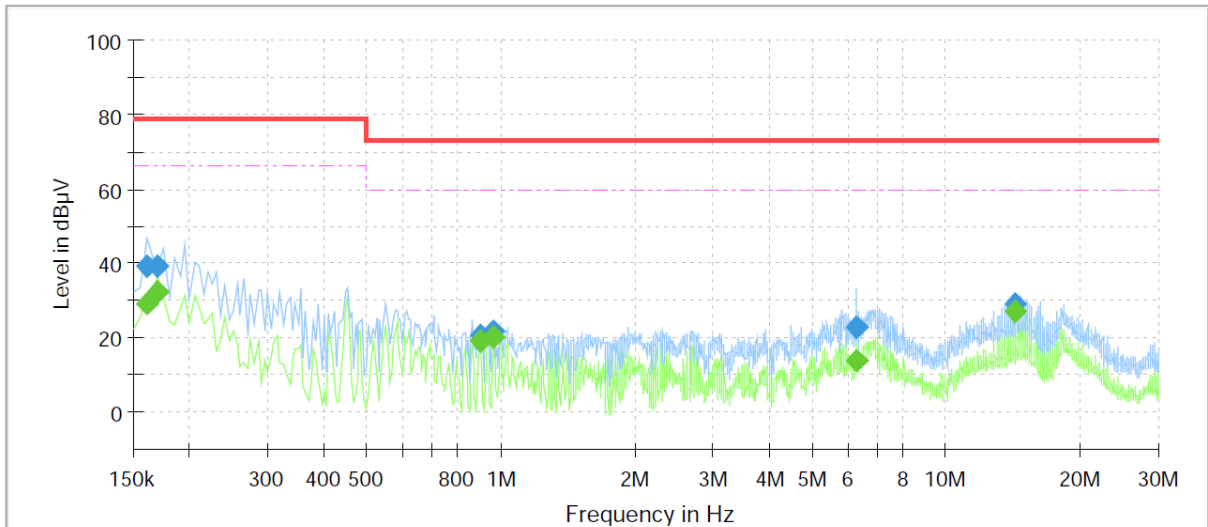

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.160000	---	29.11	66.00	36.89	1000.0	9.000	N	9.5
0.160000	39.14	---	79.00	39.86	1000.0	9.000	N	9.5
0.170000	---	32.42	66.00	33.58	1000.0	9.000	N	9.5
0.170000	38.97	---	79.00	40.03	1000.0	9.000	N	9.5
0.900000	---	19.12	60.00	40.88	1000.0	9.000	N	9.8
0.900000	20.91	---	73.00	52.09	1000.0	9.000	N	9.8
0.965000	---	20.29	60.00	39.71	1000.0	9.000	N	9.8
0.965000	21.47	---	73.00	51.53	1000.0	9.000	N	9.8
6.275000	---	13.81	60.00	46.19	1000.0	9.000	N	9.8
6.275000	22.93	---	73.00	50.07	1000.0	9.000	N	9.8
14.335000	---	26.86	60.00	33.14	1000.0	9.000	N	9.8
14.335000	29.31	---	73.00	43.69	1000.0	9.000	N	9.8

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]
 QuasiPeak / CAverage : The Final Value
 Reading Value : Not shown in the table.
 Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))


Conducted Emissions at Telecommunication Ports

■ AC/DC Adaptor Mode

[1 000 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	PNM-9085RQZ
Mode	DC CE 1000
Operator Name:	KES

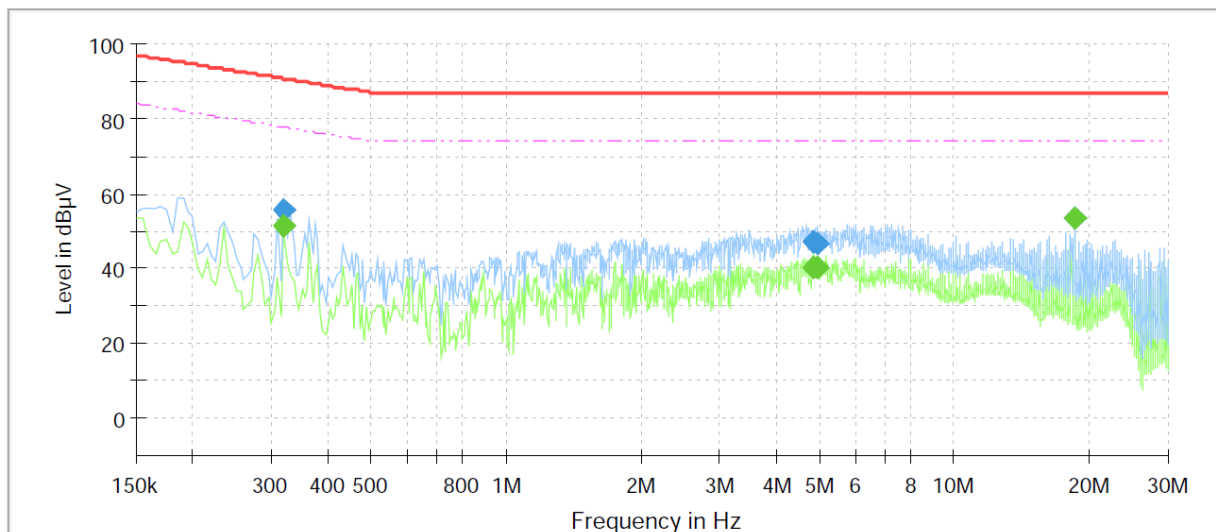

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.320000	---	51.19	77.71	26.52	1000.0	9.000	Single Line	9.5
0.320000	55.70	---	90.71	35.01	1000.0	9.000	Single Line	9.5
4.860000	---	40.26	74.00	33.74	1000.0	9.000	Single Line	9.8
4.860000	47.05	---	87.00	39.95	1000.0	9.000	Single Line	9.8
4.945000	---	40.04	74.00	33.96	1000.0	9.000	Single Line	9.8
4.945000	46.78	---	87.00	40.22	1000.0	9.000	Single Line	9.8
18.500000	---	53.35	74.00	20.65	1000.0	9.000	Single Line	9.9
18.500000	53.48	---	87.00	33.52	1000.0	9.000	Single Line	9.9


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

■ PoE Mode

[1 000 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	PNM-9085RQZ
Mode	PoE CE 1000
Operator Name:	KES

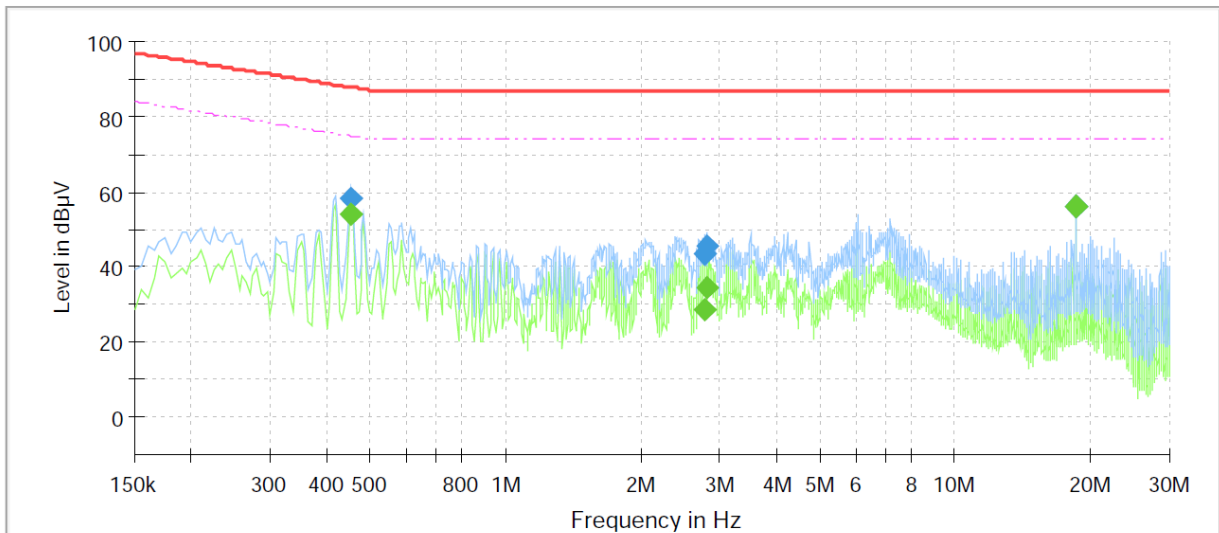

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.450000	---	54.12	74.88	20.76	1000.0	9.000	Single Line	9.6
0.450000	58.40	---	87.88	29.48	1000.0	9.000	Single Line	9.6
2.775000	---	28.76	74.00	45.24	1000.0	9.000	Single Line	10.0
2.775000	43.58	---	87.00	43.42	1000.0	9.000	Single Line	10.0
2.810000	---	34.44	74.00	39.56	1000.0	9.000	Single Line	10.0
2.810000	45.42	---	87.00	41.58	1000.0	9.000	Single Line	10.0
18.500000	---	56.16	74.00	17.84	1000.0	9.000	Single Line	9.9
18.500000	56.10	---	87.00	30.90	1000.0	9.000	Single Line	9.9


◆ Calculation

QuasiPeak [dBuV] / CAverage [dBuV] = Reading Value [dBuV] + Corr. [dB]
 QuasiPeak / CAverage : The Final Value
 Reading Value : Not shown in the table.
 Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))



Radiated Electric Field Emissions(Below 1 GHz)

■ AC/DC Adaptor Mode

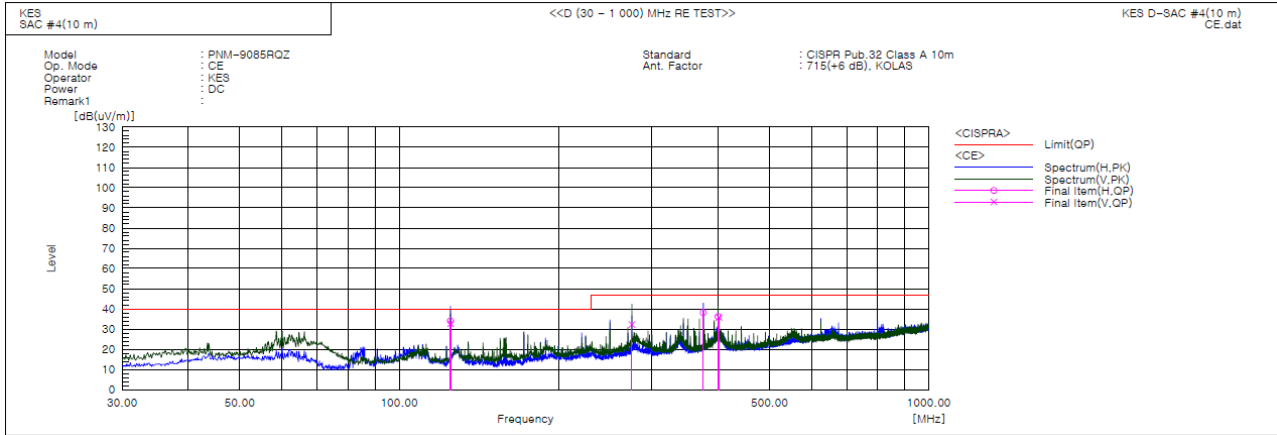

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	124.939	H	58.9	-24.8	34.1	40.0	5.9	400.0	160.0	
2	125.012	V	57.5	-24.8	32.7	40.0	7.3	100.0	164.0	
3	274.925	V	50.9	-18.6	32.3	47.0	14.7	111.0	138.0	
4	374.956	H	52.8	-14.6	38.2	47.0	8.8	385.0	138.0	
5	400.055	H	50.2	-14.0	36.2	47.0	10.8	400.0	85.0	
6	401.254	V	49.9	-14.0	35.9	47.0	11.1	100.0	153.0	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
 Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
 Tel: +82-31-425-6200 / Fax: +82-31-424-0450
 www.kes.co.kr

Report No.:
 KES-EM-22T0019-R1
 Page (48) of (78)

■ PoE Mode

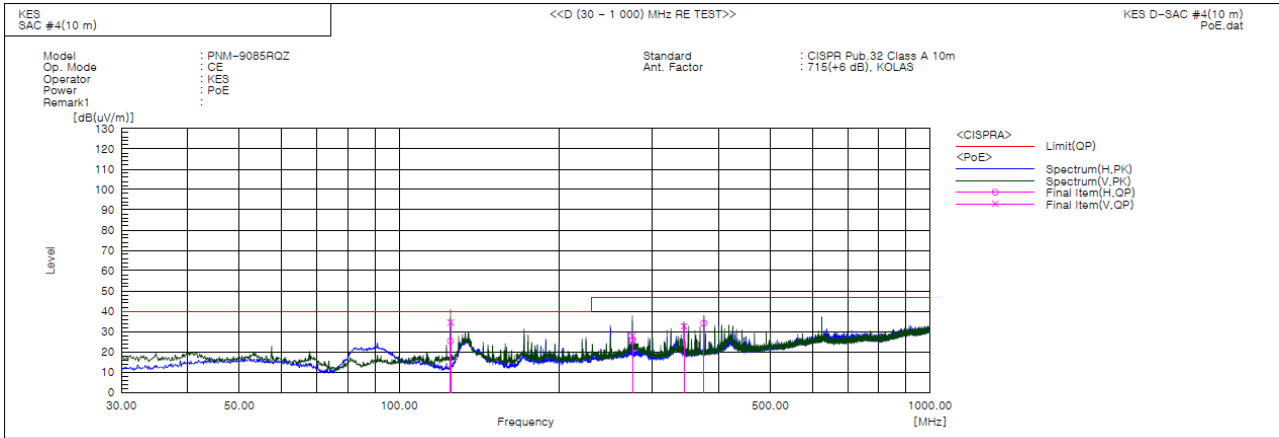

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	125.036	V	59.3	-24.8	34.5	40.0	5.5	100.0	318.0	
2	124.939	H	50.2	-24.8	25.4	40.0	14.6	400.0	358.0	
3	275.011	V	46.5	-18.6	27.9	47.0	19.1	112.0	145.0	
4	275.120	H	44.3	-18.6	25.7	47.0	21.3	368.0	173.0	
5	344.038	V	47.9	-15.3	32.6	47.0	14.4	100.0	221.0	
6	374.956	H	48.7	-14.6	34.1	47.0	12.9	400.0	150.0	

◆ Calculation – SEMI ANECHOIC CHAMBER #4(10 m)

Result(QP) [dB(μV/m)] = (Reading(QP)[dB(μV)] + c.f[dB(1/m)])

Margin(QP)[dB] = Limit[dB(μV/m)] - Result(QP) [dB(μV/m)]

Reading(QP) : Reading value, Result(QP) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
 Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
 Tel: +82-31-425-6200 / Fax: +82-31-424-0450
 www.kes.co.kr

Report No.:
 KES-EM-22T0019-R1
 Page (49) of (78)

Radiated Electric Field Emissions(Above 1 GHz)

AC/DC Adaptor Mode

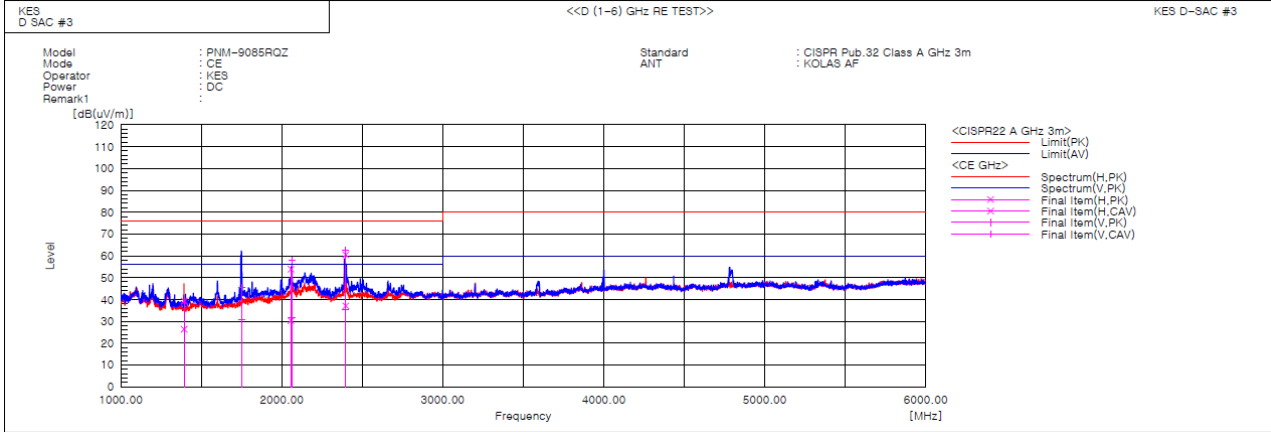

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1392.853	H	46.0	33.1	-6.7	39.3	26.4	76.0	56.0	36.7	29.6	100.0	338.3	
2	1748.267	V	49.2	34.5	-3.7	45.5	30.8	76.0	56.0	30.5	25.2	100.0	5.6	
3	2056.750	H	54.7	31.1	-0.8	53.9	30.3	76.0	56.0	22.1	25.7	100.0	55.3	
4	2060.480	V	58.8	32.6	-0.8	58.0	31.8	76.0	56.0	18.0	24.2	100.0	143.6	
5	2393.790	V	62.2	34.9	0.2	62.4	35.1	76.0	56.0	13.6	20.9	100.0	141.5	
6	2396.211	H	60.3	36.9	0.2	60.5	37.1	76.0	56.0	15.5	18.9	100.0	345.1	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
 Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
 Tel: +82-31-425-6200 / Fax: +82-31-424-0450
 www.kes.co.kr

Report No.:
 KES-EM-22T0019-R1
 Page (50) of (78)

■ PoE Mode

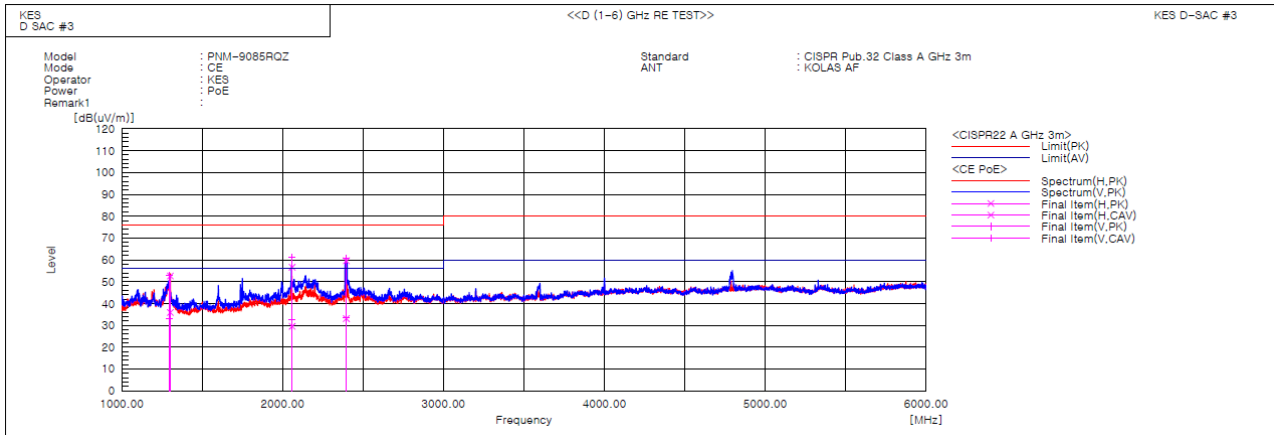

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1294.590	V	60.3	40.6	-7.6	52.7	33.0	76.0	56.0	23.3	23.0	100.0	215.3	
2	1301.641	H	60.1	43.4	-7.5	52.6	35.9	76.0	56.0	23.4	20.1	100.0	16.9	
3	2055.818	V	62.2	33.2	-0.8	61.4	32.4	76.0	56.0	14.6	23.6	100.0	23.0	
4	2058.720	H	57.4	30.3	-0.8	56.6	29.5	76.0	56.0	19.4	26.5	100.0	180.6	
5	2394.991	H	59.4	32.9	0.2	59.6	33.1	76.0	56.0	16.4	22.9	100.0	347.8	
6	2395.441	V	60.4	33.3	0.2	60.6	33.5	76.0	56.0	15.4	22.5	100.0	155.1	

◆ Calculation

Result(PK/CAV) [dB(μV/m)] = (Reading(PK/CAV)[dB(μV)] + c.f[dB(1/m)])

Margin(PK/CAV)[dB] = Limit[dB(μV/m)] - Result(PK/CAV) [dB(μV/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr



Harmonic Current Emissions and Voltage Fluctuations and Flicker

■ AC/DC Adaptor Mode

Average harmonic current results

Hn	I _{eff} [A]	% of Limit	Limit [A]	Result
1	0.095			
2	0.002	0.149	1.080	n/a
3	0.086	3.756	2.300	PASS
4	0.002	0.503	0.430	n/a
5	0.084	7.356	1.140	PASS
6	0.002	0.644	0.300	n/a
7	0.080	10.402	0.770	PASS
8	0.002	0.891	0.230	n/a
9	0.072	18.080	0.400	PASS
10	0.002	0.919	0.184	n/a
11	0.064	19.509	0.330	PASS
12	0.002	1.076	0.153	n/a
13	0.057	26.941	0.210	PASS
14	0.002	1.364	0.131	n/a
15	0.048	32.310	0.150	PASS
16	0.002	1.560	0.115	n/a
17	0.041	30.630	0.132	PASS
18	0.002	1.808	0.102	n/a
19	0.034	28.374	0.118	PASS
20	0.002	2.072	0.092	n/a
21	0.028	17.287	0.161	PASS
22	0.002	2.304	0.084	n/a
23	0.023	15.819	0.147	PASS
24	0.002	2.549	0.077	n/a
25	0.020	15.040	0.135	PASS
26	0.002	2.726	0.071	n/a
27	0.019	14.965	0.125	PASS
28	0.002	2.796	0.066	n/a
29	0.018	15.686	0.116	PASS
30	0.002	3.017	0.061	n/a
31	0.018	16.362	0.109	PASS
32	0.002	3.072	0.058	n/a
33	0.017	16.942	0.102	PASS
34	0.002	3.211	0.054	n/a
35	0.016	16.942	0.096	PASS
36	0.002	3.203	0.051	n/a
37	0.015	16.418	0.091	PASS
38	0.002	3.216	0.048	n/a
39	0.013	15.384	0.087	PASS
40	0.002	3.343	0.046	n/a

Note: Harmonic currents less than 0.6 % of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.

* Application of limits for average is 100% except for odd harmonics from 21 to 39, where 150% applies.



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
 Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
 Tel: +82-31-425-6200 / Fax: +82-31-424-0450
 www.kes.co.kr

Report No.:
 KES-EM-22T0019-R1
 Page (52) of (78)

Test Data - Harmonics (continued)

Maximum harmonic current results				
Hn	I _{eff} [A]	% of Limit	Limit [A]	Result
1	0.098			
2	0.002	0.125	1.620	n/a
3	0.091	2.628	3.450	PASS
4	0.003	0.422	0.645	n/a
5	0.087	5.105	1.710	PASS
6	0.002	0.531	0.450	n/a
7	0.083	7.200	1.155	PASS
8	0.003	0.726	0.345	n/a
9	0.075	12.463	0.600	PASS
10	0.002	0.700	0.276	n/a
11	0.067	13.453	0.495	PASS
12	0.002	0.839	0.230	n/a
13	0.058	18.406	0.315	PASS
14	0.002	1.017	0.197	n/a
15	0.049	21.954	0.225	PASS
16	0.002	1.156	0.173	n/a
17	0.041	20.692	0.199	PASS
18	0.002	1.365	0.153	n/a
19	0.034	19.051	0.178	PASS
20	0.002	1.593	0.138	n/a
21	0.028	17.358	0.161	PASS
22	0.002	1.771	0.125	n/a
23	0.023	15.986	0.147	PASS
24	0.002	1.943	0.115	n/a
25	0.021	15.338	0.135	PASS
26	0.002	2.042	0.106	n/a
27	0.019	15.487	0.125	PASS
28	0.002	2.125	0.099	n/a
29	0.019	16.453	0.116	PASS
30	0.002	2.321	0.092	n/a
31	0.019	17.215	0.109	PASS
32	0.002	2.309	0.086	n/a
33	0.018	17.806	0.102	PASS
34	0.002	2.406	0.081	n/a
35	0.017	17.650	0.096	PASS
36	0.002	2.355	0.077	n/a
37	0.015	16.951	0.091	PASS
38	0.002	2.418	0.073	n/a
39	0.014	15.684	0.087	PASS
40	0.002	2.502	0.069	n/a

Note: Harmonic currents less than 0.6 % of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.

* Application of limits for average is 100% except for odd harmonics from 21 to 39, where 150% applies.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
 Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
 Tel: +82-31-425-6200 / Fax: +82-31-424-0450
 www.kes.co.kr

Report No.:
 KES-EM-22T0019-R1
 Page (53) of (78)

■ PoE Mode

Average harmonic current results

Hn	I _{eff} [A]	% of Limit	Limit [A]	Result
1	0.101			
2	0.003	0.232	1.080	n/a
3	0.092	4.004	2.300	PASS
4	0.004	0.911	0.430	n/a
5	0.088	7.744	1.140	PASS
6	0.003	1.043	0.300	n/a
7	0.084	10.848	0.770	PASS
8	0.003	1.200	0.230	n/a
9	0.077	19.219	0.400	PASS
10	0.003	1.878	0.184	n/a
11	0.069	20.981	0.330	PASS
12	0.003	1.909	0.153	n/a
13	0.061	29.227	0.210	PASS
14	0.002	1.607	0.131	n/a
15	0.053	35.316	0.150	PASS
16	0.002	1.560	0.115	n/a
17	0.044	33.309	0.132	PASS
18	0.002	1.485	0.102	n/a
19	0.035	29.657	0.118	PASS
20	0.001	1.203	0.092	n/a
21	0.027	16.600	0.161	PASS
22	0.001	1.014	0.084	n/a
23	0.019	13.204	0.147	PASS
24	0.001	0.947	0.077	n/a
25	0.013	9.629	0.135	PASS
26	0.001	0.951	0.071	n/a
27	0.008	6.045	0.125	PASS
28	0.001	1.179	0.066	n/a
29	0.003	2.827	0.116	n/a
30	0.001	1.203	0.061	n/a
31	0.001	0.913	0.109	n/a
32	0.001	1.197	0.058	n/a
33	0.002	2.380	0.102	n/a
34	0.001	1.226	0.054	n/a
35	0.004	3.932	0.096	n/a
36	0.001	1.274	0.051	n/a
37	0.004	4.803	0.091	n/a
38	0.001	1.385	0.048	n/a
39	0.004	4.873	0.087	n/a
40	0.001	1.388	0.046	n/a

Note: Harmonic currents less than 0.6 % of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.

* Application of limits for average is 100% except for odd harmonics from 21 to 39, where 150% applies.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
 Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
 Tel: +82-31-425-6200 / Fax: +82-31-424-0450
 www.kes.co.kr

Report No.:
 KES-EM-22T0019-R1
 Page (54) of (78)

Test Data - Harmonics (continued)

Maximum harmonic current results				
Hn	I _{eff} [A]	% of Limit	Limit [A]	Result
1	0.112			
2	0.003	0.184	1.620	n/a
3	0.103	2.979	3.450	PASS
4	0.004	0.671	0.645	n/a
5	0.098	5.757	1.710	PASS
6	0.004	0.783	0.450	n/a
7	0.092	7.992	1.155	PASS
8	0.003	0.905	0.345	n/a
9	0.085	14.117	0.600	PASS
10	0.004	1.395	0.276	n/a
11	0.076	15.362	0.495	PASS
12	0.003	1.411	0.230	n/a
13	0.066	21.027	0.315	PASS
14	0.002	1.205	0.197	n/a
15	0.056	24.810	0.225	PASS
16	0.002	1.186	0.173	n/a
17	0.046	23.159	0.199	PASS
18	0.002	1.115	0.153	n/a
19	0.036	20.410	0.178	PASS
20	0.001	0.912	0.138	n/a
21	0.027	16.783	0.161	PASS
22	0.001	0.784	0.125	n/a
23	0.020	13.417	0.147	PASS
24	0.001	0.741	0.115	n/a
25	0.013	9.914	0.135	PASS
26	0.001	0.810	0.106	n/a
27	0.008	6.343	0.125	PASS
28	0.001	0.889	0.099	n/a
29	0.004	3.070	0.116	n/a
30	0.001	0.882	0.092	n/a
31	0.002	1.777	0.109	n/a
32	0.001	0.893	0.086	n/a
33	0.004	3.590	0.102	n/a
34	0.001	0.930	0.081	n/a
35	0.005	4.823	0.096	n/a
36	0.001	0.942	0.077	n/a
37	0.005	5.353	0.091	n/a
38	0.001	1.032	0.073	n/a
39	0.004	5.001	0.087	n/a
40	0.001	1.030	0.069	n/a

Note: Harmonic currents less than 0.6 % of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.

* Application of limits for average is 100% except for odd harmonics from 21 to 39, where 150% applies.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr



Test Data - Voltage Fluctuations

Maximum Flicker results

■ AC/DC Adaptor Mode

Flicker Measurements					
	Plt	Max Pst	Max Dc	Max Dmax	Max Tmax
Line 1:	0.028	0.028	0	< 0.2	0
Limits:	0.65	1	3.3	4	0.5
Results:	PASS	PASS	PASS	PASS	PASS

■ PoE Mode


Flicker Measurements					
	Plt	Max Pst	Max Dc	Max Dmax	Max Tmax
Line 1:	0.028	0.028	0	< 0.2	0
Limits:	0.65	1	3.3	4	0.5
Results:	PASS	PASS	PASS	PASS	PASS

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Test Setup Photos and Configuration

Conducted Emissions at Mains Power Ports

■ AC/DC Adaptor Mode

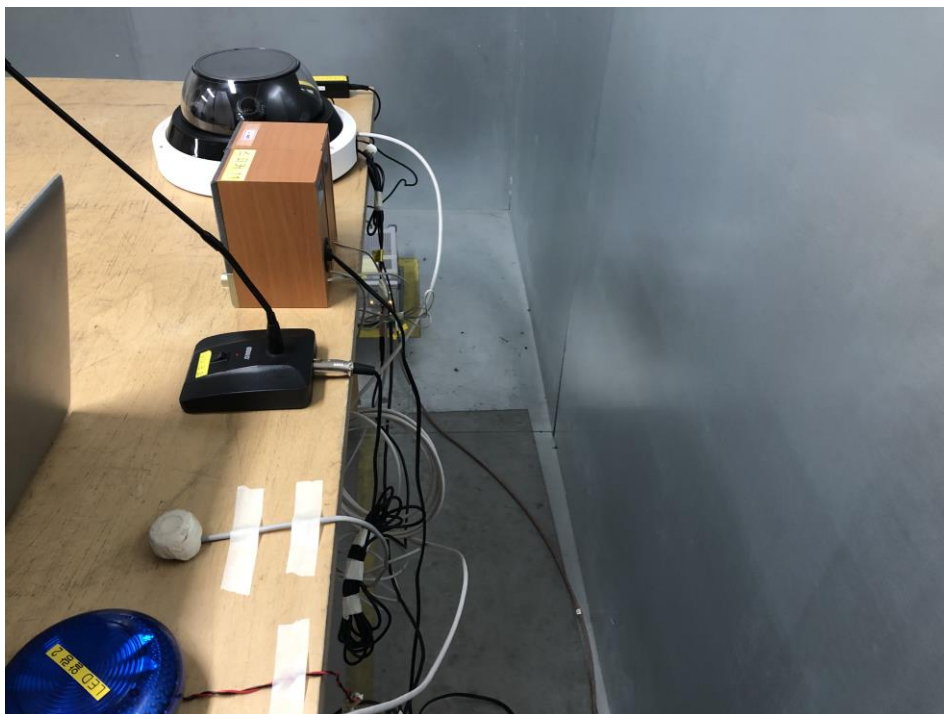

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

■ PoE Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Conducted Emissions at Telecommunication Ports

■ AC/DC Adaptor Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



■ PoE Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr


Radiated Electric Field Emissions(Below 1 GHz)

■ AC/DC Adaptor Mode

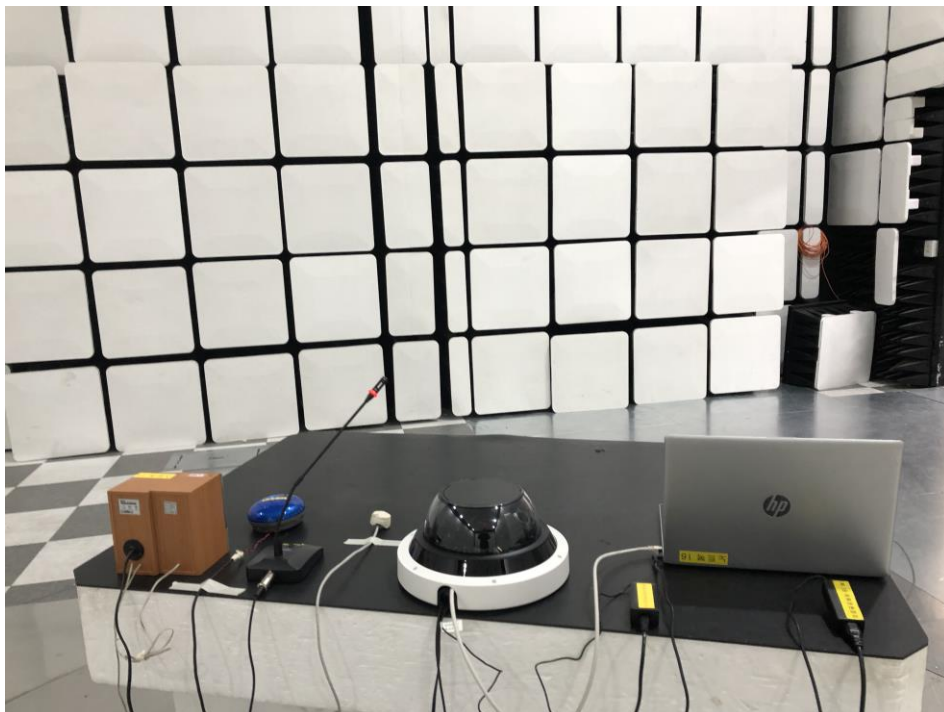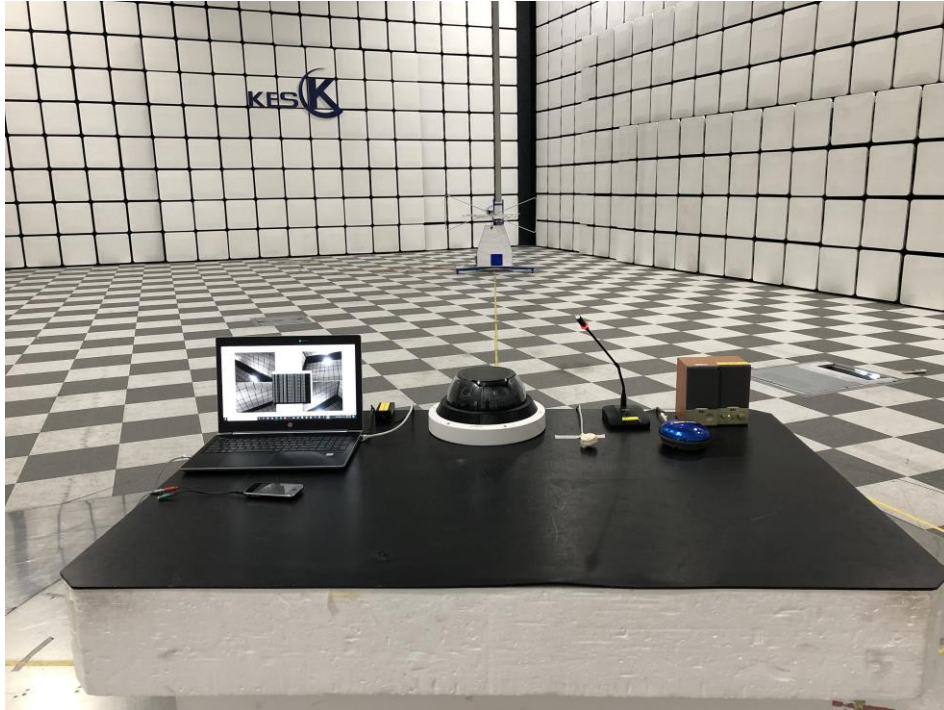

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr


■ PoE Mode

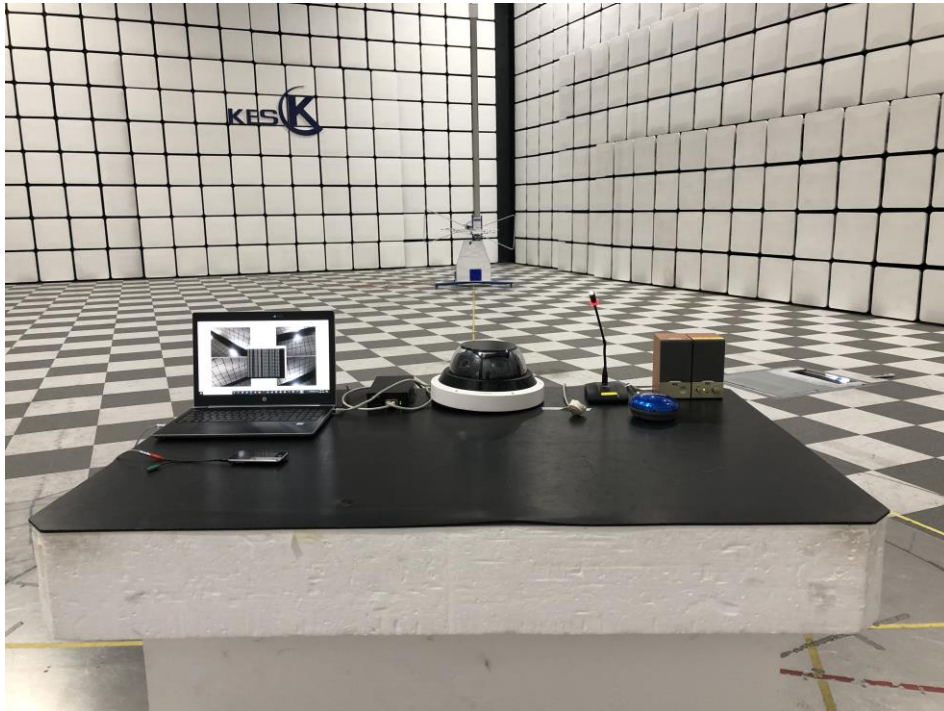

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr


Radiated Electric Field Emissions(Above 1 GHz)

■ AC/DC Adaptor Mode

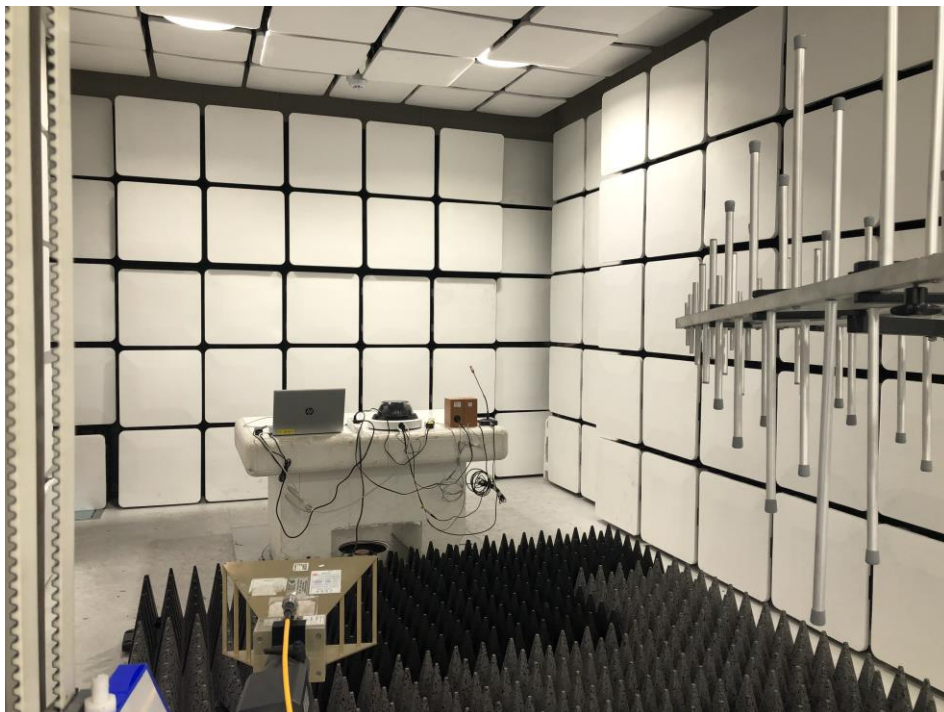

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

■ PoE Mode

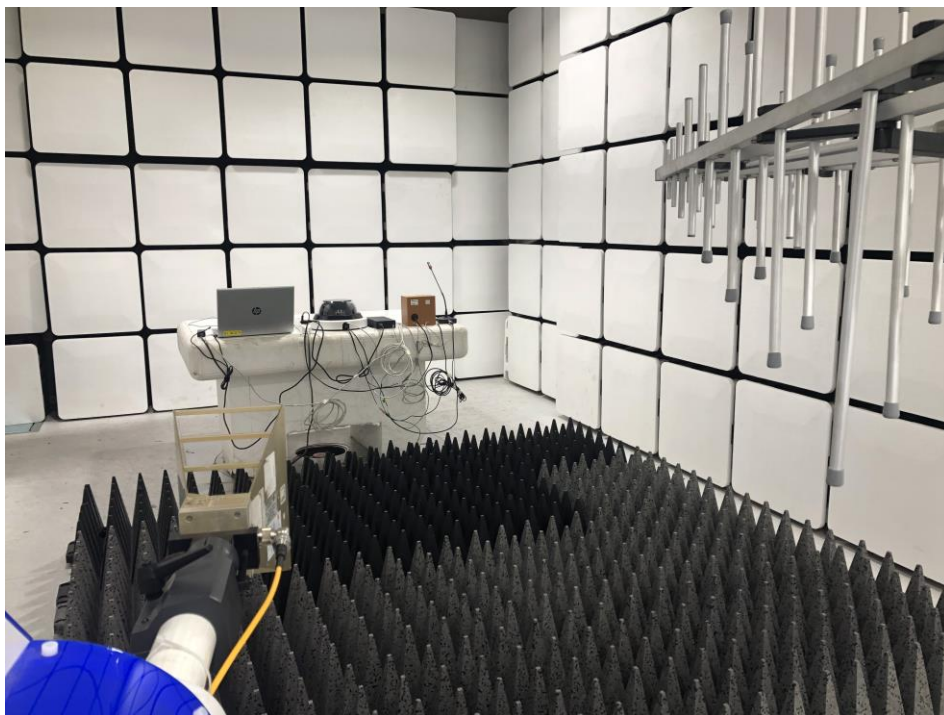

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Harmonic Current Emissions and Voltage Fluctuations and Flicker

■ AC/DC Adaptor Mode



■ PoE Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Electrostatic Discharge

■ AC/DC Adaptor Mode




■ PoE Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Radiated Electric Field Immunity

■ AC/DC Adaptor Mode

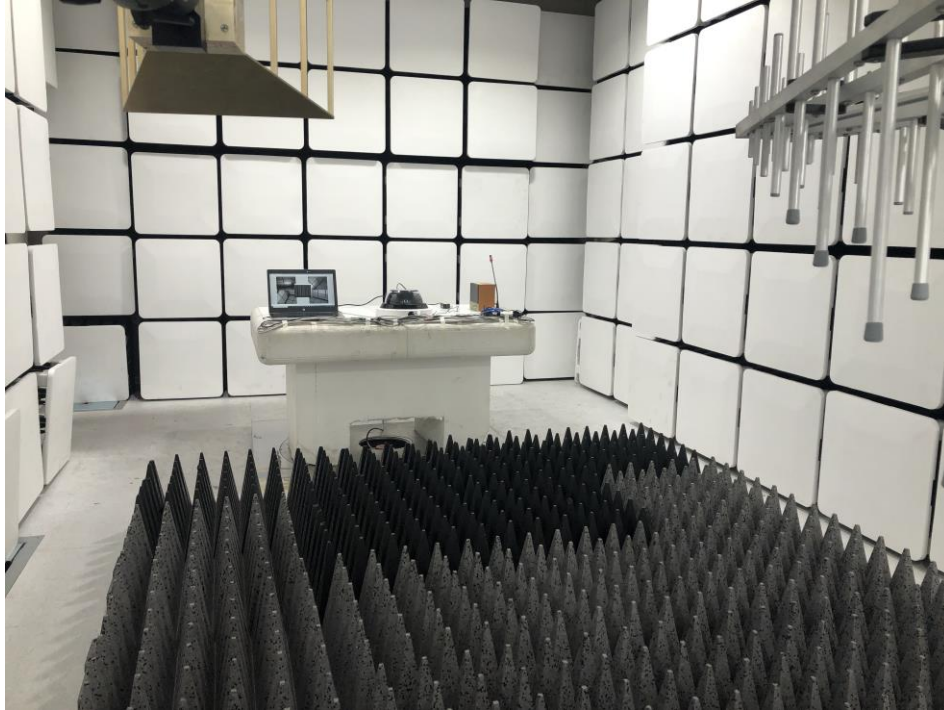

■ PoE Mode




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Electrical Fast Transients/Bursts

■ AC/DC Adaptor Mode



■ PoE Mode

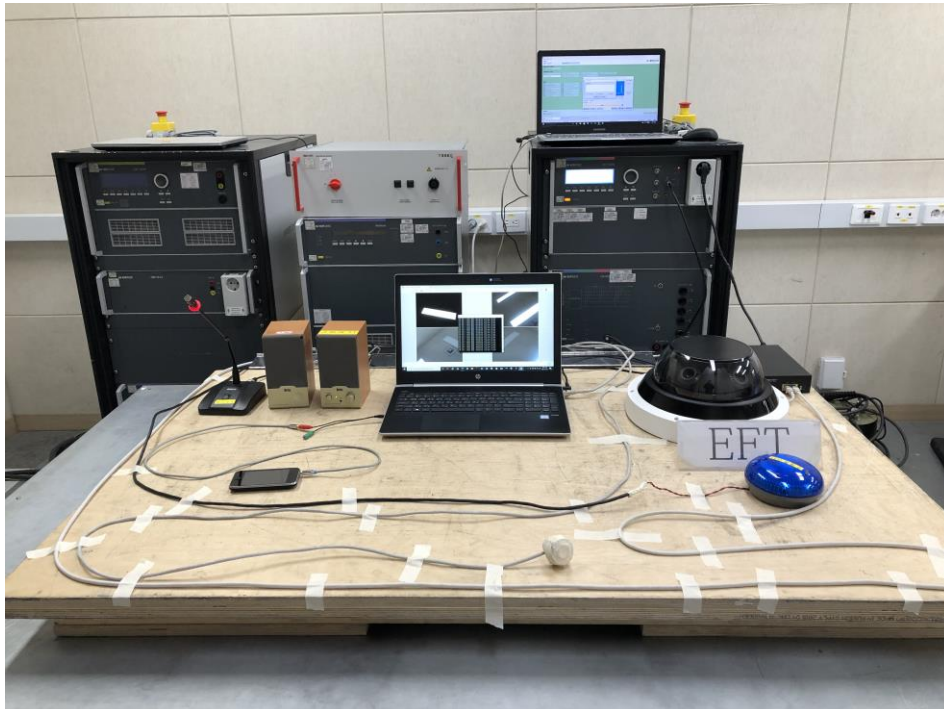

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Surge Transients

■ AC/DC Adaptor Mode




■ PoE Mode




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Conducted Disturbance

■ AC/DC Adaptor Mode

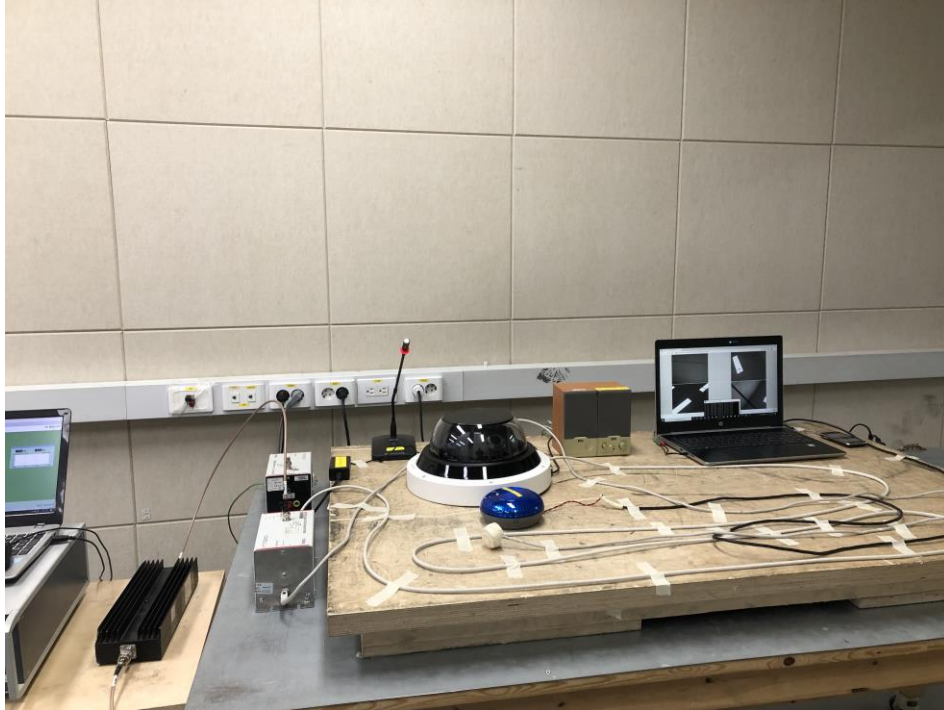

■ PoE Mode

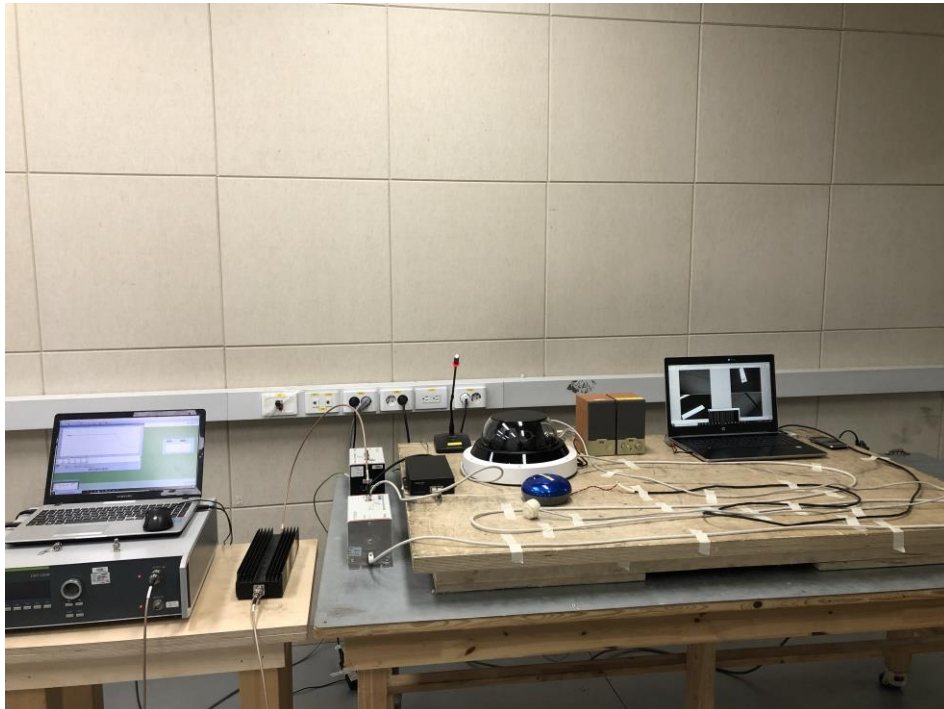

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Voltage Dips and Short Interruptions

■ AC/DC Adaptor Mode



■ PoE Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT External Photographs

(Top)




(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal Photographs

(Internal View)

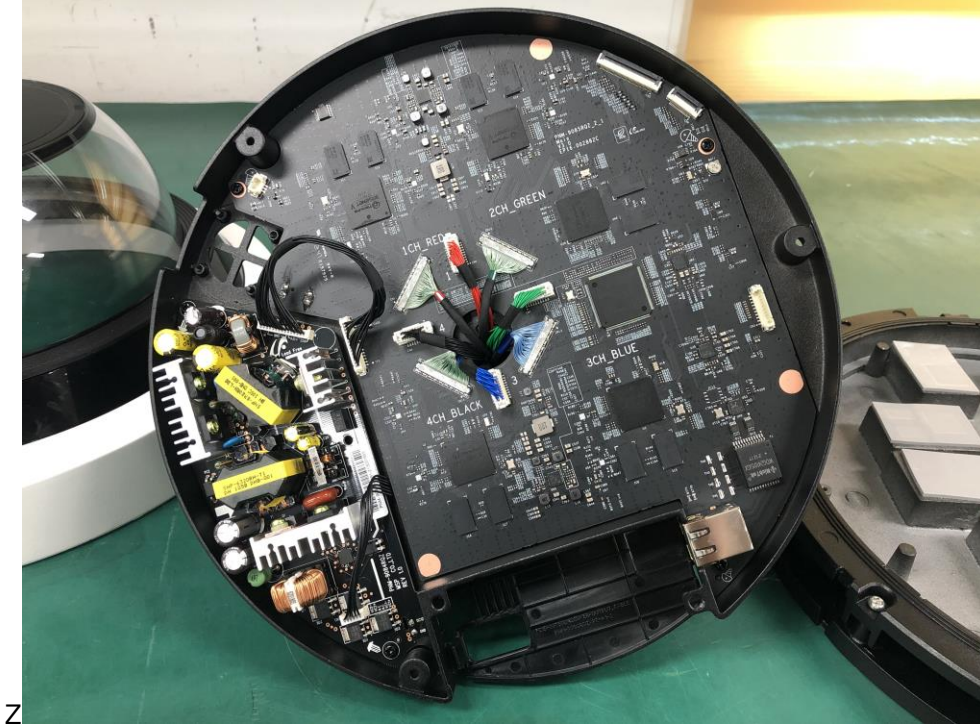


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Board 1

(Top)




(Bottom)

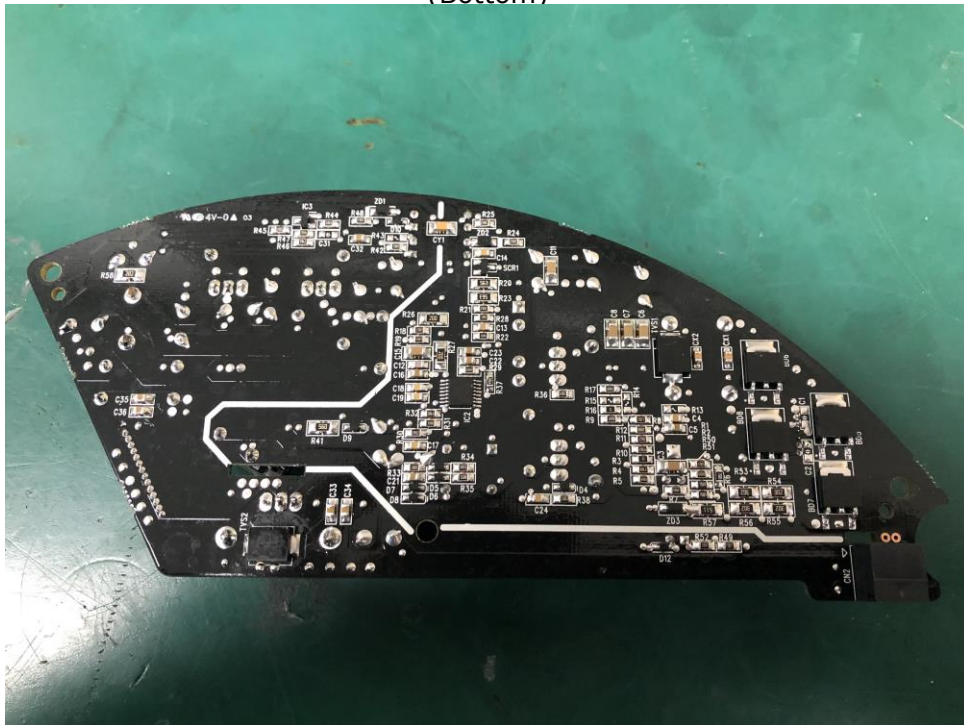

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Board 2

(Top)

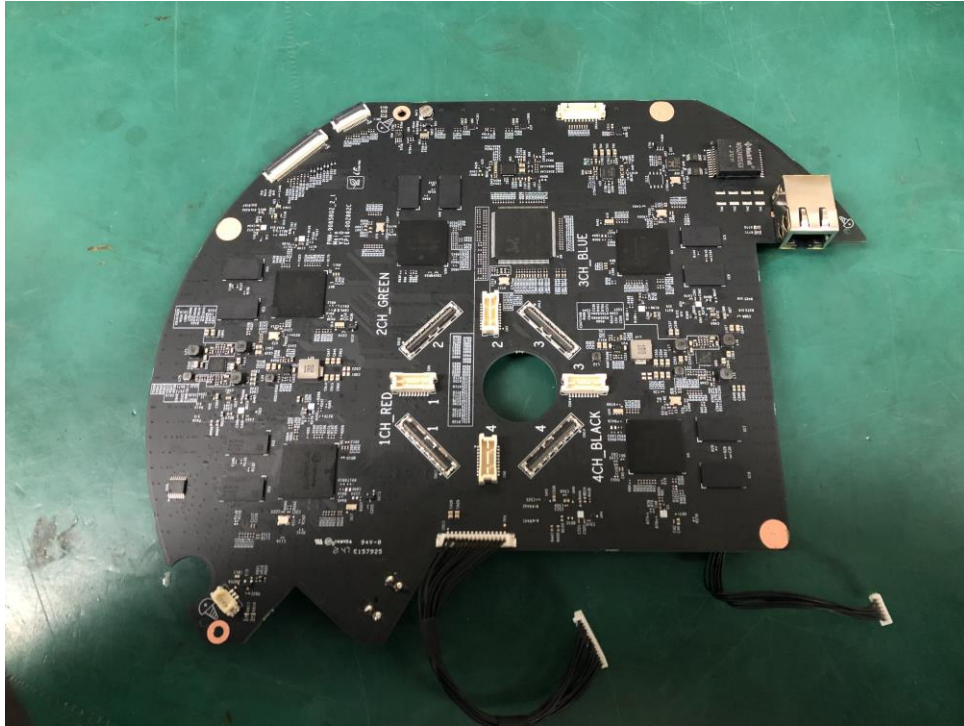

(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Board 3

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Board 4

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Board 5

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

Label and Location



NETWORK CAMERA

Model No : PNM-9085RQZ

Manufacturer : HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.

Made in Vietnam

