



Dahua Network Speed Dome & PTZ Camera Web 3.0

User's Manual








Foreword

General

The manual introduces the functions and operations of the web interface of the network speed dome and PTZ camera (hereinafter referred to as "the Device").

Safety Instructions

The following categorized signal words with defined meaning might appear in the manual.

| Signal Words | Meaning |
|--|---|
|  DANGER | Indicates a high potential hazard which, if not avoided, will result in death or serious injury. |
|  WARNING | Indicates a medium or low potential hazard which, if not avoided, could result in slight or moderate injury. |
|  CAUTION | Indicates a potential risk which, if not avoided, could result in property damage, data loss, lower performance, or unpredictable result. |
|  TIPS | Provides methods to help you solve a problem or save you time. |
|  NOTE | Provides additional information as the emphasis and supplement to the text. |

Revision History

| Version | Revision Content | Release Time |
|---------|---|----------------|
| V3.0.1 | Added Configuring User Group function. | July 2021 |
| V3.0.0 | <ul style="list-style-type: none"> Modified overlay, audio, network settings, and destination sections. Added Bluetooth settings, construction monitoring, battery exception, screen off settings, emergency maintenance, life statistics, and battery status sections. | March 2021 |
| V2.0.2 | Added the note to provide international calling codes for 4G models. | June 2020 |
| V2.0.1 | Updated OSD info, TCP/IP and smart plan, and delete life statistics. | April 2020 |
| V2.0.0 | Added some functions of the Baseline, and refine the whole manual. | January 2020 |
| V1.1.1 | Updated some functions of the Security Baseline. | September 2019 |
| V1.0.0 | First release. | May 2018 |

About the Manual

- The manual is for reference only. If there is inconsistency between the manual and the actual product, the actual product shall prevail.

- We are not liable for any loss caused by the operations that do not comply with the manual.
- The manual would be updated according to the latest laws and regulations of related regions. For detailed information, see the paper manual, CD-ROM, QR code or our official website. If there is inconsistency between paper manual and the electronic version, the electronic version shall prevail.
- All the designs and software are subject to change without prior written notice. The product updates might cause some differences between the actual product and the manual. Please contact the customer service for the latest program and supplementary documentation.
- There still might be deviation in technical data, functions and operations description, or errors in print. If there is any doubt or dispute, please refer to our final explanation.
- Upgrade the reader software or try other mainstream reader software if the manual (in PDF format) cannot be opened.
- All trademarks, registered trademarks and the company names in the manual are the properties of their respective owners.
- Please visit our website, contact the supplier or customer service if there is any problem occurred when using the device.
- If there is any uncertainty or controversy, please refer to our final explanation.

Important Safeguards and Warnings

The manual will help you to use the Device properly. Read the manual carefully before using the Device, and keep it well for future reference.

Operation Requirements

- Avoid heavy stress, violent vibration, and water splash during transportation, storage, and installation. Complete package is necessary during the transportation. We assume no responsibility for any damage or problem caused by the incomplete package during the transportation.
- To avoid damage, protect the Device from falling down and heavy vibration. Arrange more than one person to move the Device when necessary.
- Buckle the safety hook before installing the Device if it is included.
- Keep the Device away from devices that generate electromagnetic field like televisions, radio transmitters, electromagnetic devices, electric machine, transformers, and speakers; otherwise image quality will be influenced.
- Keep the Device away from smoke, vapor, heat, and dust.
- Do not install the Device near heating furnace, spotlight, and other heat sources. If it is installed on ceiling, in kitchen or near boiler room, the Device temperature might rise.
- Do not disassemble the Device; otherwise it might cause dangers or device damage. Contact your local retailer or customer service center for internal setup or maintenance requirement.
- Make sure that there is no metal, or inflammable, explosive substance in the Device; otherwise it might cause fire, short-circuit, or other damage. Power off the Device and disconnect the power cord immediately if there is water or liquid falling into the Device. And contact your local retailer or customer service center. Avoid sea water or rain eroding the Device.
- Avoid aiming the lens at intense light source, including sunlight, and incandescent light; otherwise the lens might be damaged.
- For the Device that supports laser, do not aim the laser directly at eyes. And keep a proper distance from the flammable to avoid fire.
- Clean the enclosure with soft cloth. To remove the dirt, you can dip the soft cloth in proper detergent, wring it out, and then dry the enclosure with soft cloth. Do not use gasoline, paint thinner, or other chemicals to clean the enclosure; otherwise it might result in enclosure transfiguration or paint flake. Read all the manuals included before using chemical cloth. Avoid long time touch between the plastic or rubber material and the enclosure; otherwise it might result in device damage and paint flake.
- It is recommended that you use the Device with a lightning-proof device for better lightning-proof effect.
- Contact your local retailer or customer service center if the Device is abnormal. Do not disassemble or repair the Device by yourself. We assume no responsibility for any problems caused by unauthorized modifications, disassembly or repair, incorrect installation or use, and overuse of certain components.

Requirements for Installation and Maintenance Personnel

- Have certificates or experiences related to installation and maintenance of the closed-circuit television (CCTV), and have certificates related to working at height.
- Have basic knowledge and installation skills of CCTV system.
- Have basic knowledge and operation technique for low-voltage wiring and low-voltage electronic circuit connection.
- Have the ability to read and understand the manual.

Requirements for Lifting the Device

- Use secure lifting appliances suitable for the installation place and the product installation mode.
- Make sure that the selected tools reach the installation height and have high safety performance.

Power Requirements

- All installation and operations shall conform to local electrical safety regulations.
- The power supply must conform to the requirements of ES1 in IEC 62368-1 standard and be no higher than PS2. Note that the power supply requirements are subject to the device label.
- Use the power adapter recommended by the manufacturer.
- Do not connect several devices to one power adapter; otherwise it might result in overheat or fire if it exceeds the rated load.
- Make sure that the power is off when you connect the cables, install or uninstall the Device.
- Power off the Device and disconnect the power cord immediately if there is any smoke, disgusting smell, or noise from the Device. And contact your local retailer or customer service center.

Table of Contents

| | |
|---|-----------|
| Foreword | I |
| Important Safeguards and Warnings..... | III |
| 1 Network Configuration..... | 1 |
| 1.1 Network Connection | 1 |
| 1.2 Logging in to the Web Interface..... | 1 |
| 1.2.1 Device Initialization..... | 1 |
| 1.2.2 First-time Login | 5 |
| 1.2.3 Device Login..... | 7 |
| 1.2.4 Resetting Password | 8 |
| 2 Live..... | 11 |
| 2.1 Encoding Setting..... | 11 |
| 2.2 Video Window Adjustment..... | 12 |
| 2.3 System Menu..... | 17 |
| 2.4 Video Window Functions..... | 17 |
| 2.5 PTZ Configuration | 21 |
| 2.6 PTZ Status..... | 24 |
| 3 AI Live | 26 |
| 3.1 AI Live Interface..... | 26 |
| 3.1.1 Information Display Area of Detected Targets..... | 26 |
| 3.1.2 Snapshot Display Area | 27 |
| 3.1.3 Statistics Area of the Detected Targets | 27 |
| 3.2 AI Live Settings | 28 |
| 4 Playback..... | 30 |
| 4.1 Video Playback | 30 |
| 4.1.1 Video Play Function Bar | 31 |
| 4.1.2 Recording Type | 31 |
| 4.1.3 Auxiliary Functions..... | 32 |
| 4.1.4 Video Playback File Search and Display Area..... | 32 |
| 4.1.4.1 Download Files in Batches..... | 33 |
| 4.1.4.2 Displaying File List | 34 |
| 4.1.5 Video Clipping Area..... | 36 |
| 4.1.6 Progress Bar Time Formats..... | 36 |
| 4.2 Picture Playback..... | 36 |
| 4.2.1 Picture Playing Functions..... | 37 |
| 4.2.2 Picture Playback File Search and Display Area..... | 37 |

| | |
|---|-----------|
| 4.2.3 Snapshot Types..... | 39 |
| 5 Setting..... | 40 |
| 5.1 Camera..... | 40 |
| 5.1.1 Conditions Settings..... | 40 |
| 5.1.1.1 Conditions..... | 40 |
| 5.1.1.1.1 Picture..... | 40 |
| 5.1.1.1.2 Exposure..... | 42 |
| 5.1.1.1.3 Backlight..... | 46 |
| 5.1.1.1.4 WB..... | 46 |
| 5.1.1.1.5 Day & Night..... | 47 |
| 5.1.1.1.6 Focus & Zoom..... | 49 |
| 5.1.1.1.7 IR Light..... | 50 |
| 5.1.1.1.8 Defog..... | 54 |
| 5.1.1.2 Profile Management..... | 56 |
| 5.1.2 Video..... | 57 |
| 5.1.2.1 Video Stream..... | 57 |
| 5.1.2.2 Snapshot..... | 59 |
| 5.1.2.3 Overlay..... | 60 |
| 5.1.2.3.1 Privacy Masking..... | 60 |
| 5.1.2.3.2 Channel Title..... | 61 |
| 5.1.2.3.3 Time Title..... | 61 |
| 5.1.2.3.4 OSD Info..... | 62 |
| 5.1.2.3.5 Font Attribute..... | 64 |
| 5.1.2.3.6 Picture Overlay..... | 64 |
| 5.1.2.3.7 Mobile State..... | 65 |
| 5.1.2.3.8 Custom Overlay..... | 66 |
| 5.1.2.3.9 Abnormal..... | 66 |
| 5.1.2.3.10 Latitude and Longitude..... | 67 |
| 5.1.2.4 ROI..... | 67 |
| 5.1.2.5 Path..... | 68 |
| 5.1.3 Audio..... | 69 |
| 5.1.3.1 Configuring Audio Parameters..... | 69 |
| 5.1.3.2 Configuring Alarm Audio..... | 71 |
| 5.2 Network Settings..... | 72 |
| 5.2.1 TCP/IP..... | 72 |
| 5.2.1.1 An Example of Configuring IP Address with ARP/Ping..... | 75 |
| 5.2.2 Port..... | 75 |

| | |
|--|-----|
| 5.2.3 PPPoE..... | 77 |
| 5.2.4 DDNS..... | 78 |
| 5.2.5 SMTP (Email)..... | 79 |
| 5.2.6 UPnP..... | 82 |
| 5.2.7 Bonjour..... | 83 |
| 5.2.8 SNMP..... | 84 |
| 5.2.9 Multicast..... | 87 |
| 5.2.9.1 RTP..... | 87 |
| 5.2.9.2 TS..... | 87 |
| 5.2.10 Auto Register..... | 88 |
| 5.2.11 Wi-Fi..... | 88 |
| 5.2.11.1 Wi-Fi Settings..... | 88 |
| 5.2.11.2 WPS Settings..... | 90 |
| 5.2.11.3 AP Settings..... | 90 |
| 5.2.12 802.1x..... | 91 |
| 5.2.13 QoS..... | 92 |
| 5.2.14 4G/5G..... | 92 |
| 5.2.14.1 Dialing Setting..... | 93 |
| 5.2.14.2 Mobile Setting..... | 94 |
| 5.2.15 Access Platform..... | 96 |
| 5.2.15.1 P2P..... | 96 |
| 5.2.15.2 ONVIF..... | 97 |
| 5.2.15.3 RTMP..... | 98 |
| 5.3 Bluetooth Settings..... | 99 |
| 5.4 PTZ Settings..... | 101 |
| 5.4.1 Protocol..... | 101 |
| 5.4.1.1 Network PTZ Settings..... | 101 |
| 5.4.1.2 Analog PTZ Settings..... | 101 |
| 5.4.2 Function..... | 102 |
| 5.4.2.1 Preset..... | 102 |
| 5.4.2.1.1 Preset Settings..... | 103 |
| 5.4.2.1.2 Special Preset Settings..... | 104 |
| 5.4.2.2 Tour..... | 104 |
| 5.4.2.3 Scan..... | 105 |
| 5.4.2.4 Pattern..... | 106 |
| 5.4.2.5 Pan..... | 107 |
| 5.4.2.6 PTZ Speed..... | 108 |

| | |
|--|------------|
| 5.4.2.7 Idle Motion | 109 |
| 5.4.2.8 PowerUp | 109 |
| 5.4.2.9 PTZ Limit | 110 |
| 5.4.2.10 Time Task | 111 |
| 5.4.2.11 PTZ Restart | 112 |
| 5.4.2.12 Default | 112 |
| 5.5 Event Management | 113 |
| 5.5.1 Video Detection | 113 |
| 5.5.1.1 Motion Detection | 113 |
| 5.5.1.2 Video Tamper | 117 |
| 5.5.1.3 Scene Changing | 118 |
| 5.5.2 Smart Motion Detection | 119 |
| 5.5.3 Audio Detection | 120 |
| 5.5.4 Smart Plan | 122 |
| 5.5.5 IVS | 124 |
| 5.5.5.1 Tripwire | 125 |
| 5.5.5.2 Intrusion | 127 |
| 5.5.5.3 Abandoned Object | 128 |
| 5.5.5.4 Missing Object | 130 |
| 5.5.6 Construction Monitoring | 131 |
| 5.5.7 Face Recognition | 137 |
| 5.5.7.1 Face Detection | 137 |
| 5.5.7.2 Face Database Config | 138 |
| 5.5.7.2.1 Adding Face Database | 138 |
| 5.5.7.2.2 Adding Face Pictures | 139 |
| 5.5.7.2.3 Managing Face Pictures | 143 |
| 5.5.7.2.4 Face Modeling | 144 |
| 5.5.7.3 Alarm Linkage | 145 |
| 5.5.8 People Counting | 146 |
| 5.5.8.1 People Counting Settings | 146 |
| 5.5.8.2 Report | 148 |
| 5.5.9 Heat Map | 148 |
| 5.5.9.1 Heat Map Settings | 148 |
| 5.5.9.2 Report | 149 |
| 5.5.10 Video Metadata | 150 |
| 5.5.10.1 Scene Setting | 150 |
| 5.5.10.2 Picture Overlay | 152 |

| | |
|--|-----|
| 5.5.10.3 Report | 153 |
| 5.5.11 Alarm | 154 |
| 5.5.12 Abnormality | 155 |
| 5.5.12.1 SD Card | 155 |
| 5.5.12.2 Network Exception | 157 |
| 5.5.12.3 Illegal Access | 158 |
| 5.5.12.4 Security Exception | 158 |
| 5.5.12.5 Battery Exception | 159 |
| 5.6 Storage | 160 |
| 5.6.1 Schedule | 160 |
| 5.6.1.1 Record | 160 |
| 5.6.1.2 Snapshot | 161 |
| 5.6.1.3 Holiday Schedule | 162 |
| 5.6.2 Snapshot by Location | 163 |
| 5.6.3 Destination | 164 |
| 5.6.3.1 Path | 164 |
| 5.6.3.2 FTP | 165 |
| 5.6.3.3 Local | 166 |
| 5.6.3.4 NAS | 167 |
| 5.6.4 Record Control | 167 |
| 5.7 System Management | 169 |
| 5.7.1 Device Settings | 169 |
| 5.7.1.1 General | 169 |
| 5.7.1.2 Date & Time | 169 |
| 5.7.1.3 Screen Off Settings | 171 |
| 5.7.2 Account Settings | 171 |
| 5.7.2.1 Account | 171 |
| 5.7.2.1.1 Username | 171 |
| 5.7.2.1.2 Group Name | 175 |
| 5.7.2.2 Onvif User | 177 |
| 5.7.3 Safety | 178 |
| 5.7.3.1 RTSP Authentication | 178 |
| 5.7.3.2 System Service | 178 |
| 5.7.3.3 HTTPS | 180 |
| 5.7.3.4 Firewall | 188 |
| 5.7.4 Peripheral | 189 |
| 5.7.4.1 Wiper | 189 |

| | |
|---|-----|
| 5.7.5 Default..... | 190 |
| 5.7.6 Import/Export..... | 190 |
| 5.7.7 System Maintenance..... | 191 |
| 5.7.7.1 Auto Maintain..... | 191 |
| 5.7.7.2 Emergency Maintenance..... | 192 |
| 5.7.8 Upgrade..... | 192 |
| 5.8 Information..... | 193 |
| 5.8.1 Version..... | 193 |
| 5.8.2 Log Information..... | 194 |
| 5.8.2.1 Log..... | 194 |
| 5.8.2.2 Remote Log..... | 195 |
| 5.8.3 Online User..... | 196 |
| 5.8.4 Life Statistics..... | 196 |
| 5.8.5 Battery Status..... | 196 |
| 6 Alarm..... | 198 |
| 7 Logout..... | 200 |
| Appendix 1 Cybersecurity Recommendations..... | 201 |

1 Network Configuration

1.1 Network Connection

To view the web interface on your PC, connect the Device to the PC first. There are mainly two connection modes between the Device and PC.



The models presented in the figures are for reference only, and the actual product shall prevail.

Figure 1-1 Direct connection by using a network cable


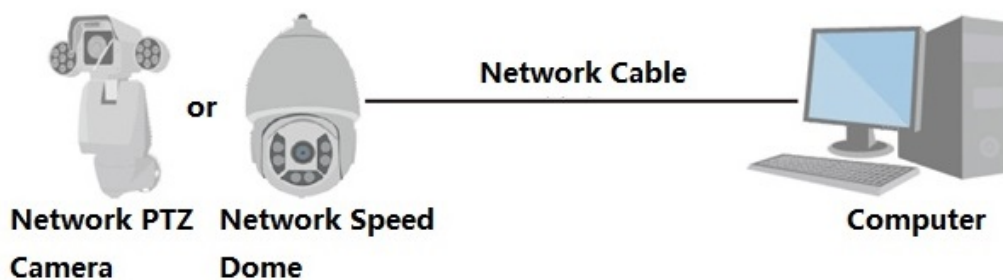


Figure 1-2 Connection by using a switch or router

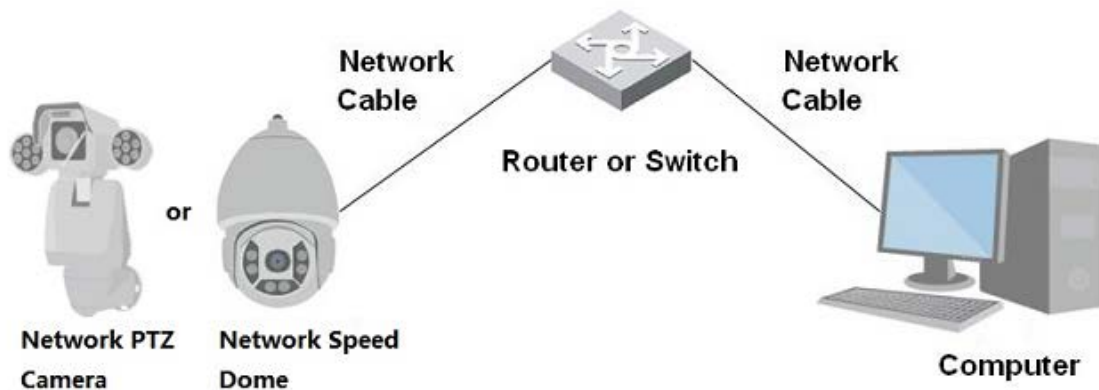

All devices have the same IP address (192.168.1.108 by default) when they are delivered out of factory. To make the Device get access to network smoothly, plan available IP segment reasonably according to practical network environment.

1.2 Logging in to the Web Interface

1.2.1 Device Initialization

For first-time use or after you have restored the Device to defaults, you need to initialize the Device by performing the following steps.

Step 1 Open the browser, enter the IP address of the Device in the address bar, and then press the Enter key.

The **Country/Region Setting** interface is displayed. Set the **Country/Region**, **Language** and **Video Standard** as needed.

Figure 1-3 Country/region setting

The screenshot shows a web interface titled "Country/Region Setting". It contains three rows of settings, each with a label and a dropdown menu:

- Country/Region: Australia
- Language: English
- Video Standard: PAL

A "Save" button is positioned at the bottom center of the interface.

Step 2 Click **Save**, and the **Time Zone Setting** interface is displayed. Configure time parameters.

Figure 1-4 Time zone setting

The screenshot shows a web interface titled "Time Zone Setting". It contains the following elements:

- Date Format: YYYY-MM-DD
- Time Zone: (UTC+04:30) Kabul
- Current Time: 2019-02-27 13 : 51 : 36 (with a calendar icon and a Sync PC button)
- A red message: "It will be modified as 2019-02-27 10:21:36"
- A "Next" button at the bottom center.

Step 3 Click **Next**.

The **Device Initialization** interface is displayed. For the interface, see Figure 1-5. For the parameter description, see Table 1-1.

Figure 1-5 Device initialization

Device Initialization

Username: admin

Password: [masked]

Confirm Password: [masked]


Use a password that has 8 to 32 characters, it can be a combination of letter(s), number(s) and symbol(s) with at least two kinds of them. (please do not use special symbols like ' " ; : &)

Email Address [masked]

To reset password, please input properly or update in time.

Save


Table 1-1 Device initialization parameter description

| Parameter | Description |
|------------------|---|
| Username | It is admin by default. |
| Password | The password should consist of 8 to 32 non-blank characters and contain at least two types of characters among upper case, lower case, number, and special characters (excluding ' " ; : &). Set a high security password according to the prompt of password strength. Make sure that the new password is the same as the confirming password. |
| Confirm Password | Enter the confirming password that shall be the same as the password you entered. |
| Email Address | Set the email address which is used to reset password.  Email address is enabled by default. You can disable the function as needed. |

Step 4 Click **Save**.


The **End-User License Agreement** interface is displayed.

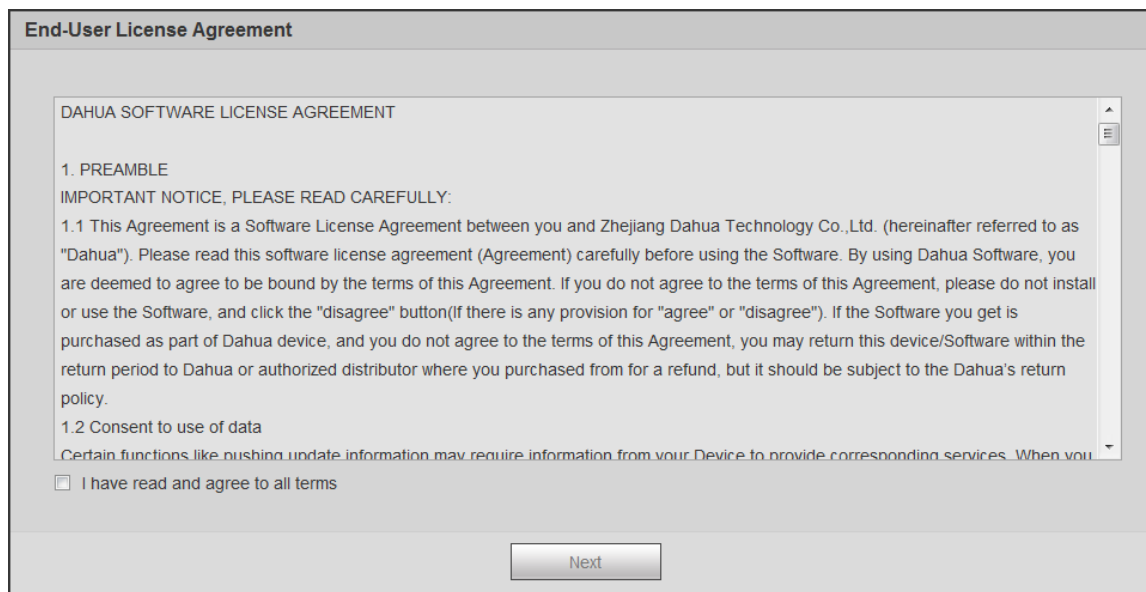Figure 1-6 End-user license agreement




- Step 5** Select **I have read and agree to all terms** check box, and then click **Next**.
The **P2P** interface is displayed.

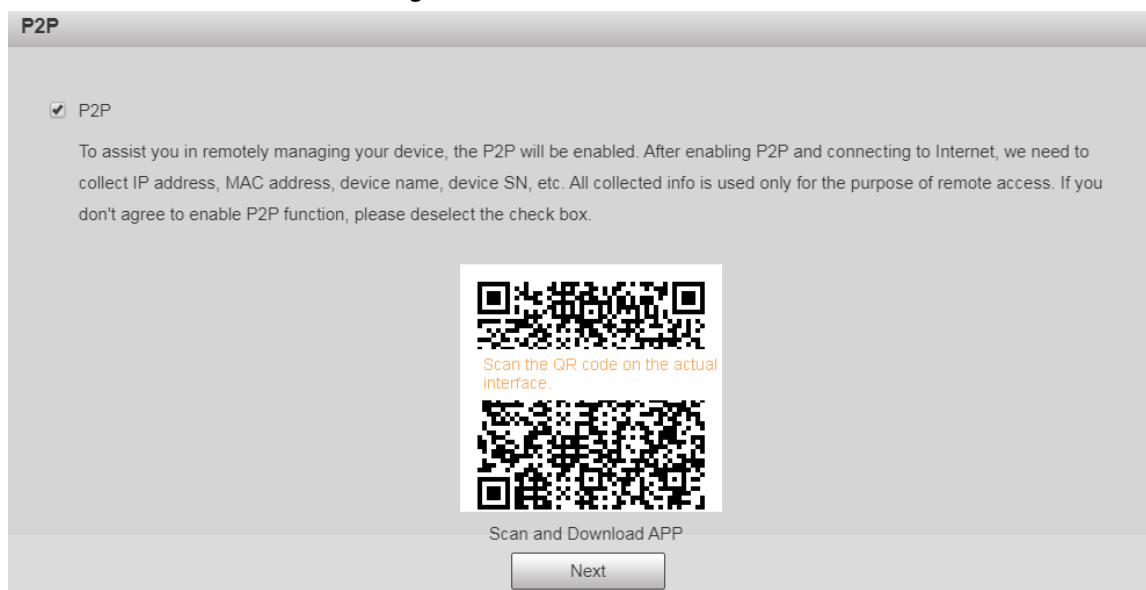Figure 1-7 P2P interface



- Step 6** Scan the QR code on the interface, download the app, and then finish configurations according to the instructions on your mobile device. After that, click **Next**.
The **Online Upgrade** interface is displayed.

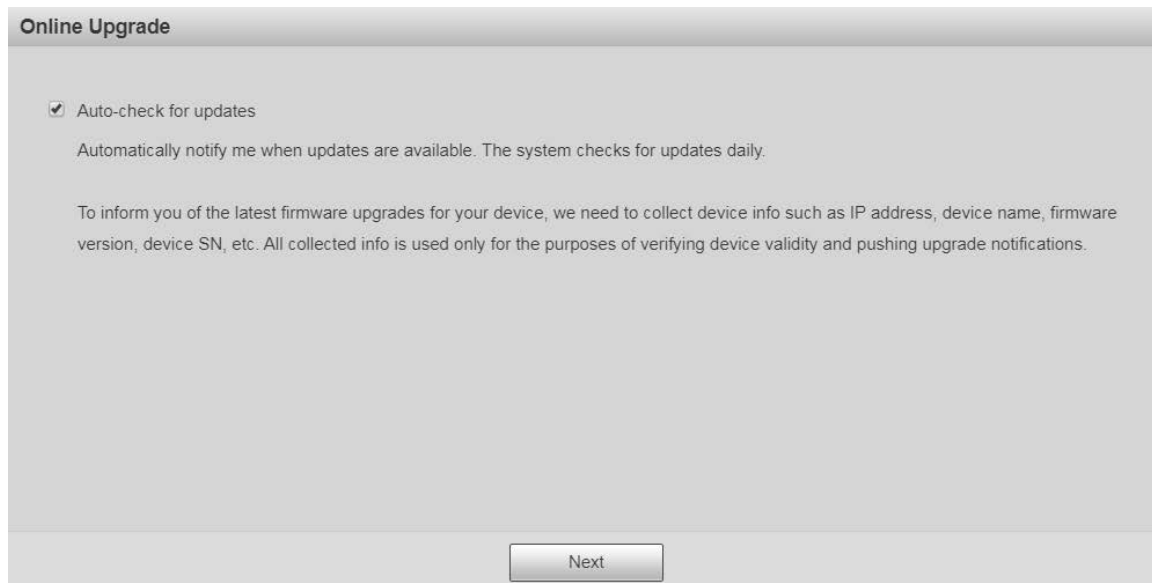Figure 1-8 Online upgrade



- Step 7** Select **Auto-check for updates** check box as needed.
After the function is enabled, the Device will check for updates once a day automatically.
There will be system notice if any update is available.
- Step 8** Click **Next**, and the login interface is displayed.

Figure 1-9 Login interface



1.2.2 First-time Login

You need to download and install the plug-in for the first-time login.


- Step 1** Open the browser, enter the IP address of the Device in the address bar, and then press Enter.
- Step 2** Enter the username and password, and then click **Login**.
The web interface is displayed.



- If you enter the wrong password for 5 times, the account will be locked for 5 minutes. After the locked time, you can log in to the web interface again.
- You can set the number of allowed password attempts and locked time in "5.5.12.3 Illegal Access".


Step 3 Download and install the plug-in according to the on-screen instruction after logging in to the web interface.

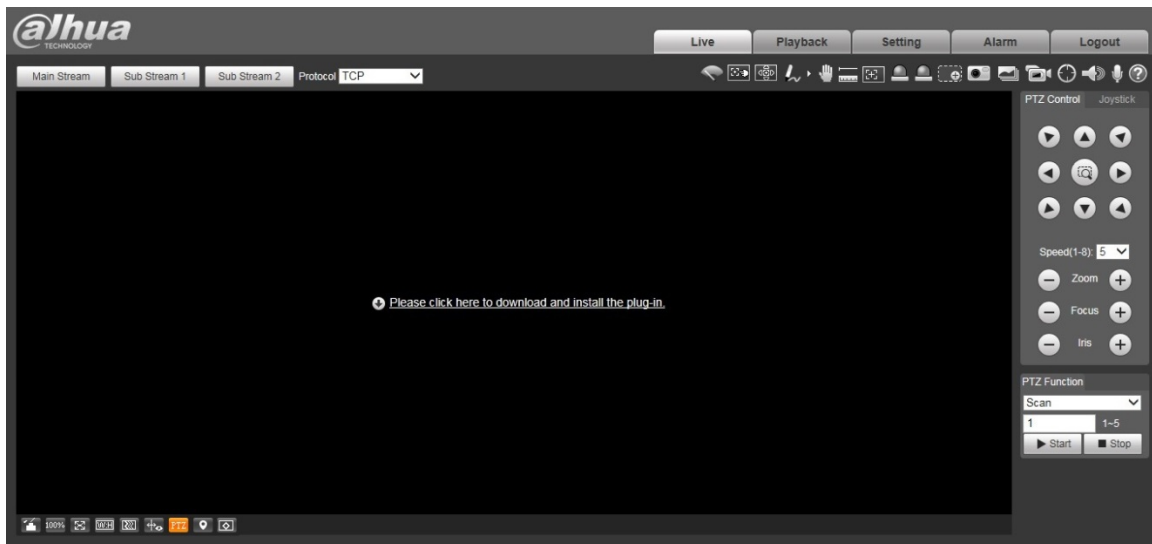Figure 1-10 Install the plug-in



Step 4 After the plug-in is installed, the web interface will be refreshed automatically, and the video is displayed on the **Live** interface.

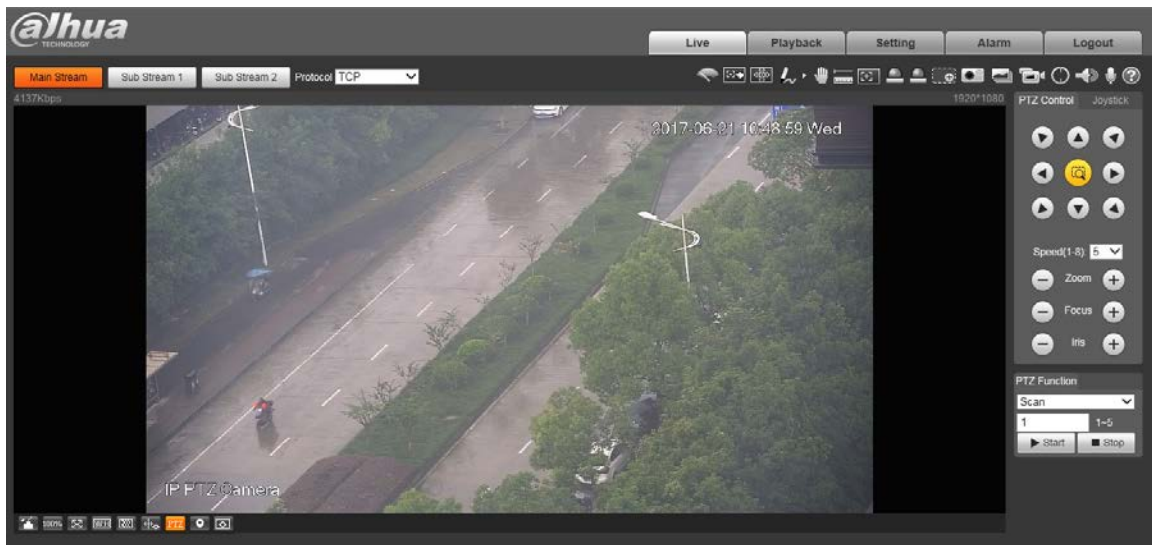Figure 1-11 Live interface



The **Live** interface shown in the manual is for reference only, and the actual interface shall prevail.

1.2.3 Device Login

Step 1 Open the browser, enter the IP address of the Device in the address bar, and then press Enter.

The **Login** interface is displayed.

Figure 1-12 Device login



Step 2 Enter the username and password, and then click **Login**.

The web interface is displayed, and the video is displayed on the **Live** interface.



- If you enter the wrong password for 5 times, the account will be locked for 5 minutes. After the locked time, you can log in to the web interface again.
- You can set the number of allowed password attempts and locked time. For details, see "5.5.12.3 Illegal Access".

1.2.4 Resetting Password

If you forget the password of the admin user, you can set the password through the provided email address.



Before resetting the password, you need to provide the email address in advance. For details, see "1.2.1 Device Initialization" or "5.7.3.2 System Service".

Step 1 Open the browser, enter the IP address of the Device in the address bar, and then press Enter.


The **Login** interface is displayed.

Figure 1-13 Login



Step 2 Click **Forgot password?**, and the **Prompt** interface is displayed.

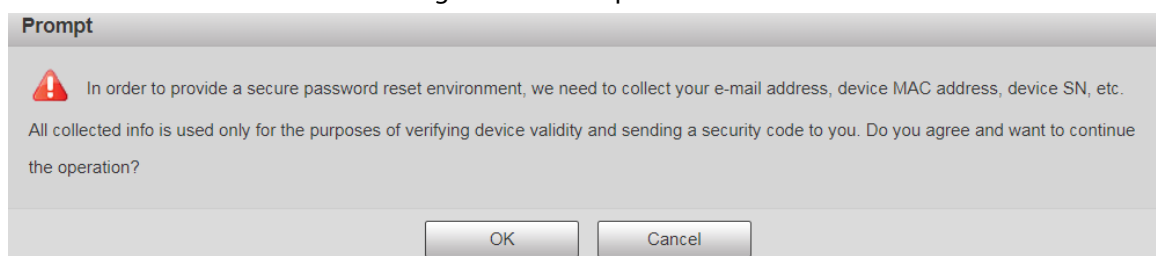Figure 1-14 Prompt



Step 3 Click **OK** to reset the password.

The **Reset the password (1/2)** interface is displayed.



If you click **OK**, your email address, MAC address, device serial number, and other information might be collected.

Figure 1-15 Reset the password (1)

Reset the password(1/2)

SN: [redacted]

QR code:

Scan the QR code on the actual interface.

Note(For admin only):

Option 1. Please download DMSS and then from More-Reset Device Password, scan the left QR code.

Option 2. Please use an APP to scan the left QR code to get encryption strings. And then send the strings to support_pwd@global.dahuatech.com.

The security code will be delivered to [redacted]

Security code:

Cancel Next

Step 4 Scan the QR code on the actual interface according to the instructions, and then enter the security code received in the mailbox.




Reset the password with the security code you received within 24 hours, otherwise the code will be invalid.

Step 5 Click **Next**.

The **Reset the password (2/2)** interface is displayed.

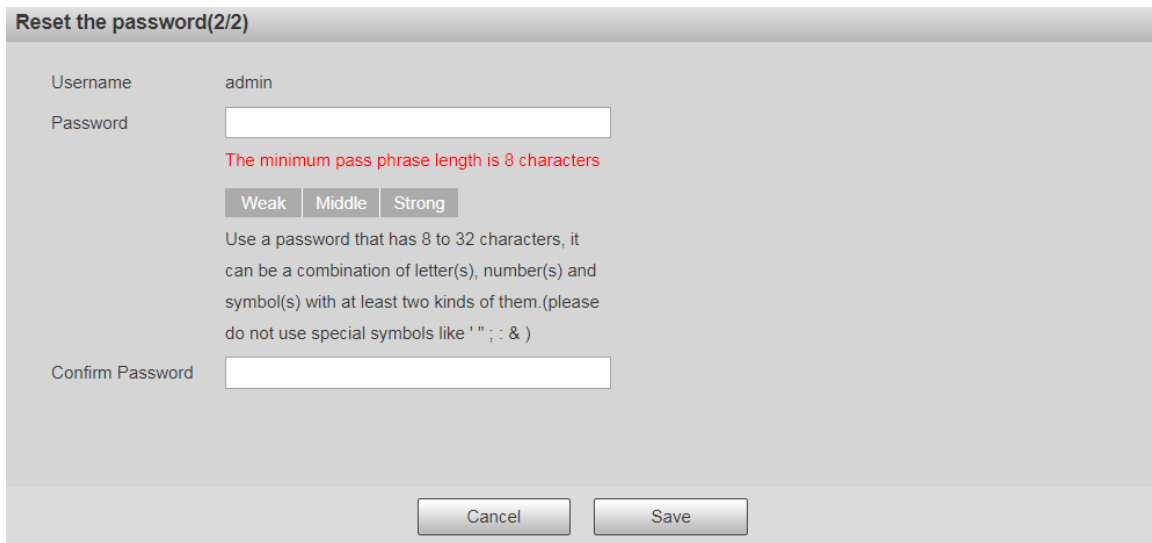Figure 1-16 Resetting the password (2)



Reset the password(2/2)

Username admin

Password

The minimum pass phrase length is 8 characters

Weak Middle Strong

Use a password that has 8 to 32 characters, it can be a combination of letter(s), number(s) and symbol(s) with at least two kinds of them. (please do not use special symbols like ' ' ; : &)

Confirm Password

Cancel Save

Step 6 Set the password of the admin user again.



The password should consist of 8 to 32 non-blank characters and contain at least two types of characters among upper case, lower case, number, and special characters (excluding ' ' ; : &). Set a high security password according to the prompt of password strength.

Step 7 Click **Save**.

2 Live

Click the **Live** tab, and the **Live** interface is displayed.

Figure 2-1 Live interface

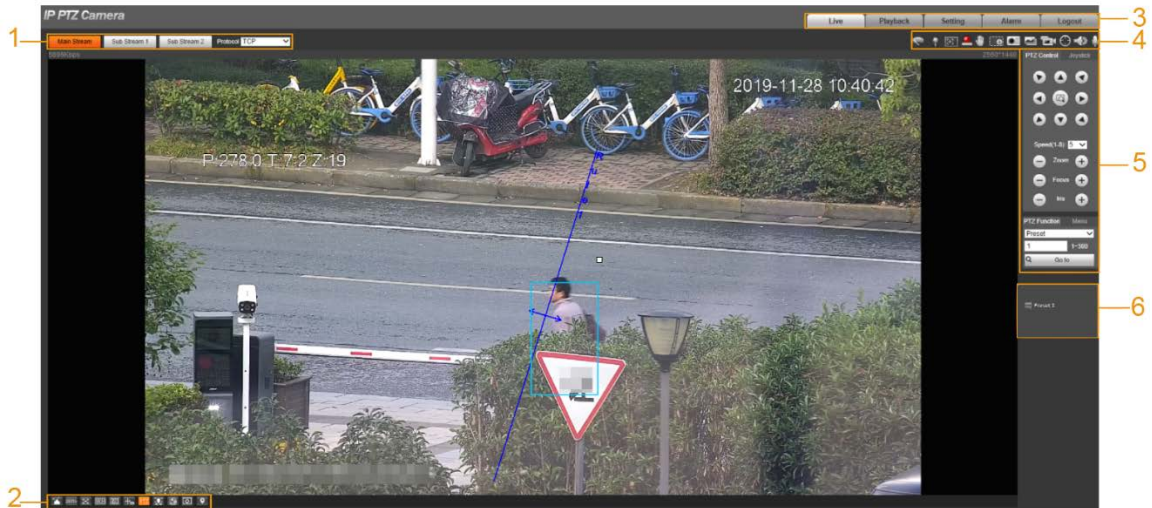


Table 2-1 Function bars description

| No. | Description |
|-----|-------------------------|
| 1 | Encoding setting |
| 2 | Video window adjustment |
| 3 | System menu |
| 4 | Video window functions |
| 5 | PTZ configuration |
| 6 | PTZ status |

2.1 Encoding Setting



Some devices do not support two sub streams.

For the encoding setting area, see Figure 2-2. For the parameter description, see Table 2-2.

Figure 2-2 Encoding setting




Table 2-2 Encoding setting parameter description

| Parameter | Description |
|--------------|---|
| Main Stream | It has large bit stream value and image with high resolution, but requires large bandwidth. This option can be used for storage and monitoring. |
| Sub Stream 1 | It has small bit stream value and smooth image, and requires little |

| Parameter | Description |
|--------------|---|
| Sub Stream 2 | bandwidth. This option is normally used to replace main stream when bandwidth is not enough. |
| Protocol | Select a protocol for video monitoring. The supported protocols include TCP (Transmission Control Protocol), UDP (User Datagram Protocol), and Multicast . |

2.2 Video Window Adjustment

For the video window adjustment bar, see Figure 2-3. For parameter description, see Table 2-3.

Figure 2-3 Video window adjustment

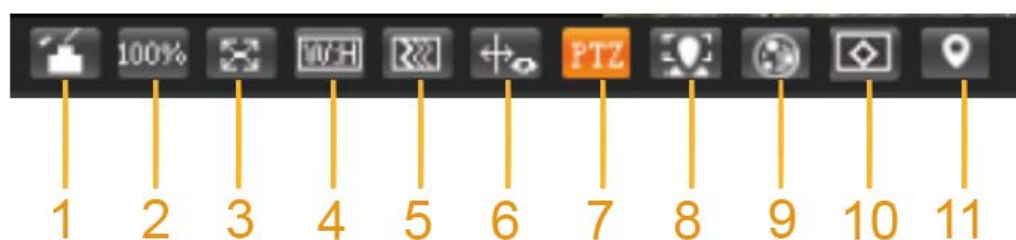


Table 2-3 Video window adjustment parameter description

| No. | Parameter | Description |
|-----|------------------|---|
| 1 | Image Adjustment | Click this button, and the Image Adjustment interface is displayed on the right side of the Live interface. You can adjust parameters such as brightness, contrast, hue, and saturation on the interface. |
| 2 | Original Size | Adjust the video image to original size. |
| 3 | Full Screen | Click this button, and the video is displayed in full screen. To exit full screen, double-click the screen or press the Esc key. |
| 4 | W:H | Adjust the video image to original ratio or a proper window. |
| 5 | Fluency | Click this button, and you can select Realtime , General , or Fluent . General is selected by default. |
| 6 | Rules Info | Click this button, and smart rules are displayed on the Live interface after the function is enabled. The function is enabled by default. |
| 7 | PTZ | Click this button, and PTZ configurations are displayed on the Live interface after the function is enabled. |
| 8 | Face | Click this button, and face pictures are displayed on the screen. See Figure 2-8. |
| 9 | Video Metadata | Click this button, and information about motor vehicles, non-motor vehicles, and people is displayed on the screen in real time. See Figure 2-11. |
| 10 | Anti-aliasing | Click this button to enable anti-aliasing, and then aliasing can be avoided when video windows are small. |

| No. | Parameter | Description |
|-----|-----------|---|
| 11 | Panorama | Click this button, and a panorama window is displayed on the Live interface. You can perform operations such as positioning, calling presets, and setting tours. |

Image Adjustment

For **Image Adjustment** interface, see Figure 2-4. For parameter description, see Table 2-4.

Figure 2-4 Image adjustment




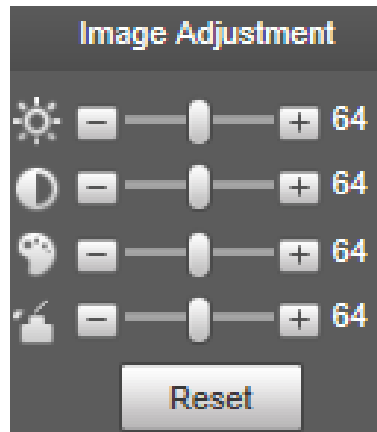




Table 2-4 Image adjustment parameter description

| Parameter | Description |
|---|---|
|  | Adjust the image brightness. |
|  | Adjust the image contrast. |
|  | Adjust the image hue. |
|  | Adjust the image saturation. |
|  | Restore brightness, contrast, saturation and hue to default values. |



Only brightness, contrast, hue, and saturation of live view image on the web interface can be adjusted with this function. To adjust the brightness, contrast, hue, and saturation of the Device, you can go to **Setting > Camera > Conditions**.

Panorama

Figure 2-5 Panorama interface




- You can perform positioning in this window by drawing a box with the left mouse button. The located area is displayed on the **Live** interface and enlarged.
- After you click **Refresh**, the Device rotates from 0 to 360 degrees horizontally and from 6 to 65 degrees vertically to obtain a new panoramic image.
- You can adjust the size of the panoramic image by dragging the screen ratio bar .
- You can click **Preset** to call a corresponding preset on the right side of the window. For the interface, see Figure 2-6. For how to set a preset, see "5.4.2.1 Preset".

Figure 2-6 Preset



- You can click **Tour** to call a corresponding tour on the right side of the window. For the interface, see Figure 2-7. For how to set a tour, see "5.4.2.2 Tour".


Figure 2-7 Tour



Face

For the **Face** interface, see Figure 2-8. Face recognition result is displayed on the left side, and the captured face picture and attributes are displayed on the right side.

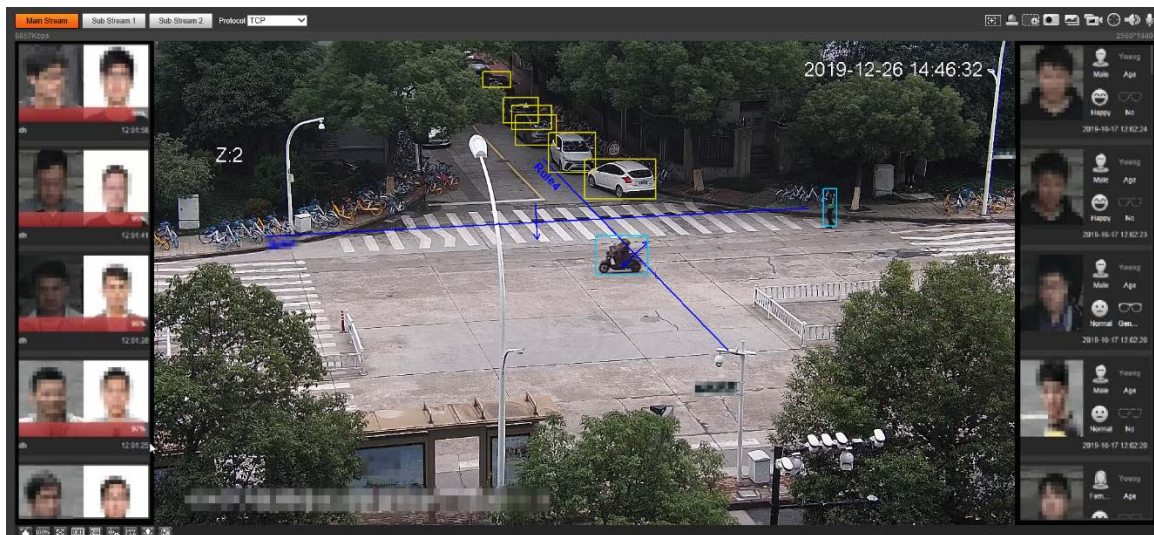Figure 2-8 Face



- Face recognition result display area: Displays the captured small face pictures, the corresponding face pictures in the database, and the similarities between them. After you click the picture, the attributes and details are displayed.

Figure 2-9 Face recognition result display



- Face and attributes display area: Displays the captured small face pictures and information such as gender, age, and expression. After you click the picture, the details are displayed.


Figure 2-10 Face and attributes display



Video Metadata

For the interface, see Figure 2-11. Motor vehicle information is displayed on the right side, and the information about human and non-motor vehicles is at the bottom of the interface. For more details, see "5.5.10 Video Metadata".

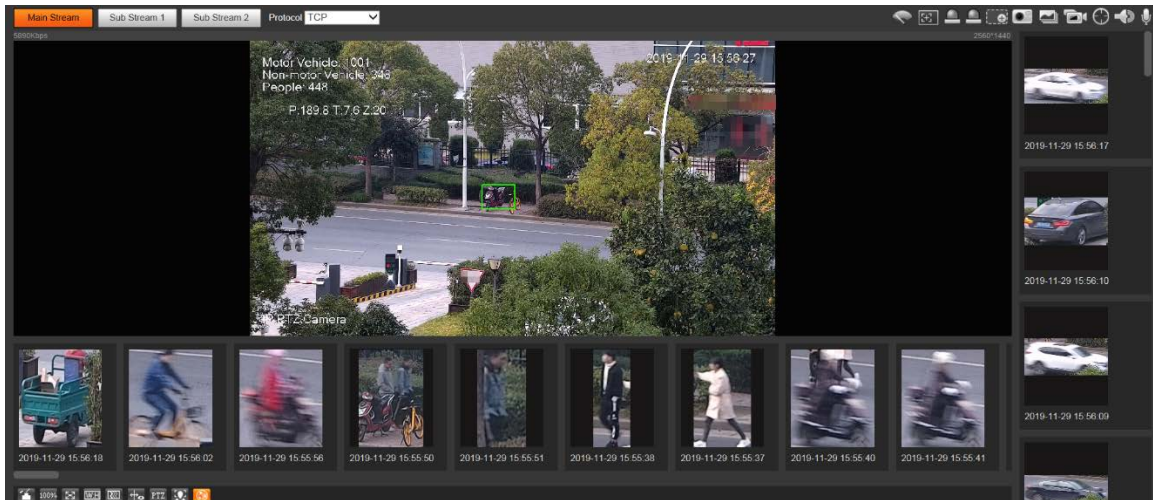
Figure 2-11 Video metadata



2.3 System Menu

To access an interface, click the corresponding tab on the system menu.

Figure 2-12 System menu



2.4 Video Window Functions

For the video window function buttons, see Figure 2-13. For the parameter description, see Table 2-5.

Figure 2-13 Video window function buttons

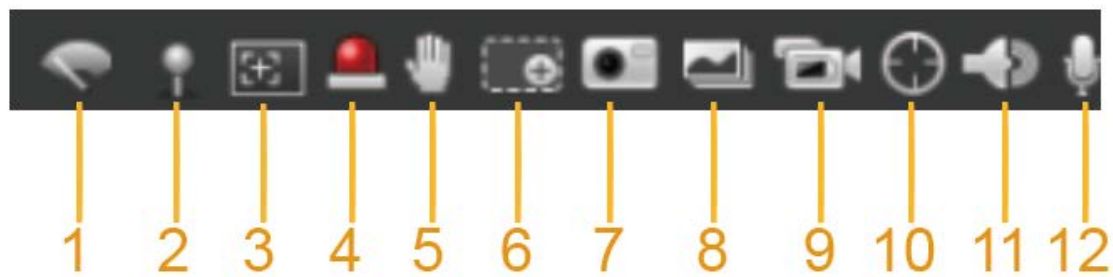


Table 2-5 Video window function button description

| No. | Parameter | Description |
|-----|-----------------|--|
| 1 | Wiper Control | Click this button to select wiper operation. <ul style="list-style-type: none"> • Start: Click this button, and the wiper starts and waves continuously. • Stop: Click this button, and the wiper is turned off and stops waving. • Once: Click this button, and the wiper starts and waves from left to right for one time. |
| 2 | Mark | Click this button, right-click on the Live interface, and the function menu is displayed. See Figure 2-14. You can add information on the Live interface, and also manage added comments. <ul style="list-style-type: none"> • Add info: Select Add Info from the pop-up menu, and enter the comment. For the interface, see Figure 2-15. • Manage comments: Select Info Management from the pop-up menu to display, hide, or delete added comments. For the interface, see Figure 2-16. |
| 3 | Regional Focus | Click the button, draw a box with the mouse on the live view, and then the Device will automatically focus on the area in the box. |
| 4 | Relay-out | Click the button, and an alarm will be triggered. When an alarm is triggered, the icon turns red; and when an alarm is canceled, the icon turns grey. |
| 5 | Gesture Control | Click the button, and you can drag the live view by pressing and holding the left mouse button to control PTZ; and you can also zoom in or out through the mouse wheel. |
| 6 | Digital Zoom | <ul style="list-style-type: none"> • Click the button, and then select an area in the live view to zoom in; right-click on the image to restore to the original status. In enlarged status, drag the image to check other area. • Click the button, and then scroll the mouse wheel in the live view to zoom in or out. |
| 7 | Snapshot | Click the button to capture one picture of the current image, and it will be saved to the live snapshot storage path set in "5.1.2.5 Path." |


| No. | Parameter | Description |
|-----|-----------------|--|
| 8 | Triple Snapshot | Click the button, and three pictures of the current image are captured with one snapshot per second. These snapshots will be saved to the live snapshot storage path set in "5.1.2.5 Path." |
| 9 | Record | Click the button to record videos. The recording will be saved to the live recording storage path set in "5.1.2.5 Path." |
| 10 | Manual Track | Click the button and select any area by dragging the left mouse button in the video window; the Device tracks objects in this area intelligently. |
| 11 | Audio | <p>Click the button to enable or disable audio output of the monitoring stream.</p>  <p>Before using the function, you need to enable the audio of the corresponding stream in Setting > Camera > Audio first.</p> |
| 12 | Talk | Click the button to enable or disable the two-way audio. |

Figure 2-14 Mark—menu


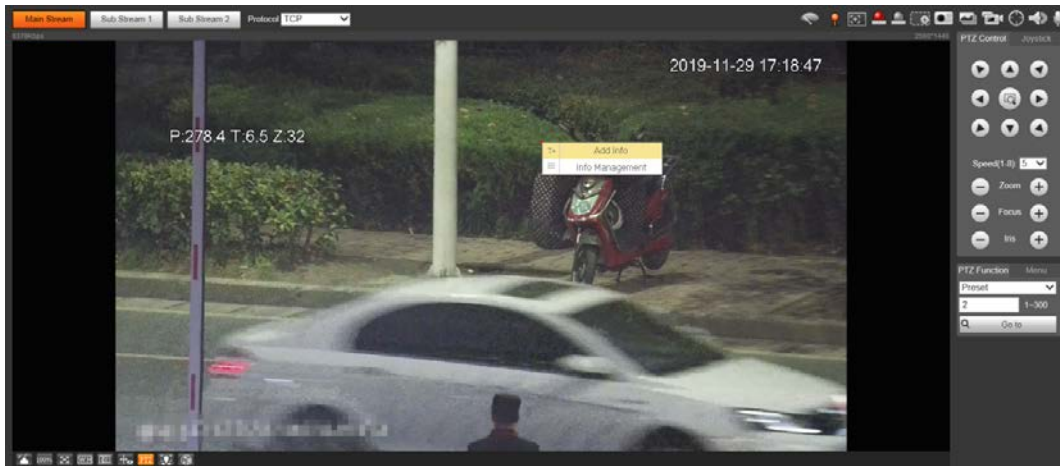


Figure 2-15 Mark—add comments

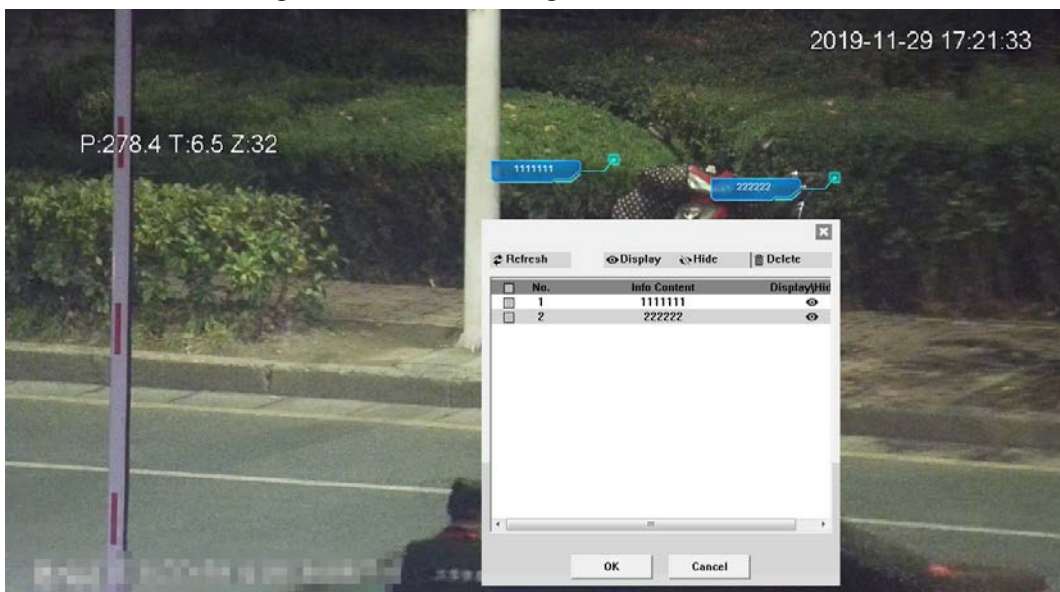

Figure 2-16 Mark—manage comments



2.5 PTZ Configuration

You can control PTZ by using the **PTZ Control** panel or joystick. You can also set preset, scanning, and other functions in the **PTZ Function** area.

PTZ Control



Before using the **PTZ Control** panel, you need to set the PTZ protocol by selecting **Setting > PTZ > Protocol**.

For **PTZ Control** panel, see Figure 2-17. For parameter description, see Table 2-6.

Figure 2-17 PTZ control

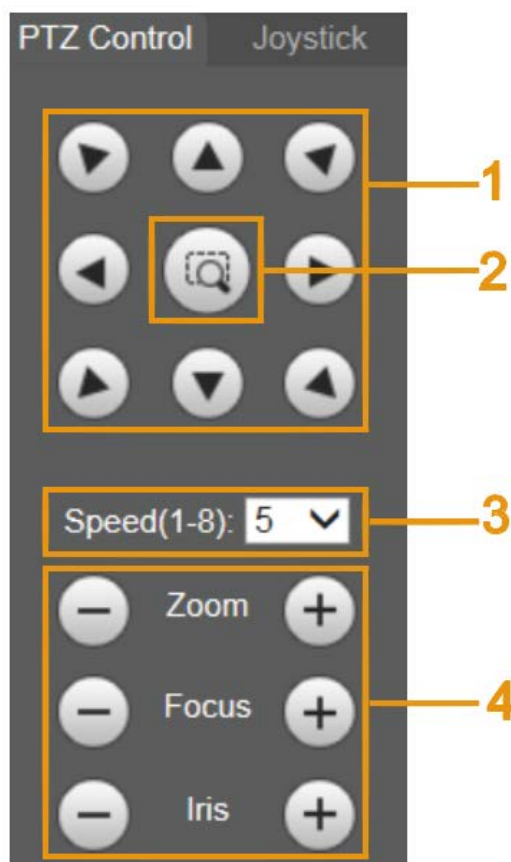




Table 2-6 PTZ control parameter description

| No. | Parameter | Description |
|-----|-------------------|--|
| 1 | Direction Buttons | There are 8 directions: Up, down, left, right, upper left, upper right, lower left, and lower right. |
| 2 | Position | Provides quick positioning function. Draw a box in the live view with the mouse, and then the PTZ rotates to and focuses on the selected area rapidly. |
| 3 | Speed | The changing speed of PTZ direction. The higher the value, the faster the speed. |

| No. | Parameter | Description |
|-----|-----------------|---|
| 4 | Zoom/Focus/Iris | Click  to increase the value, and click  to decrease the value. |

Joystick

You can drag the middle button to simulate joystick operations to control device rotation. For the operation interface, see Figure 2-18. Speed, zoom, focus, and iris configurations are the same as that of **PTZ Control** panel.

Figure 2-18 Joystick



PTZ Functions




The PTZ supports multiple functions. Select a function, click  or  to start using the function, and then click  to stop using the function. For the configuration interface, see Figure 2-19. For the supported functions and settings, see Table 2-7.

Figure 2-19 PTZ functions

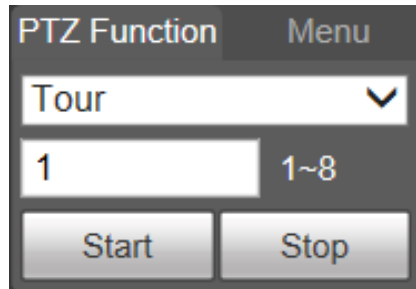



Table 2-7 PTZ functions description

| Parameter | Description |
|-----------|--|
| Scan | Select Scan from the list, enter a scan number, and then click Start . The PTZ starts scanning, and the default number is 1. |
| Preset | Select Preset from the list, enter a preset number, and then click Go to . The PTZ will rotate to the preset position. |
| Tour | Select Tour from the list, enter a tour number, and then click Start . The PTZ starts to tour. |
| Pattern | Select Pattern from the list, enter a pattern number, and then click Start . The PTZ starts to pattern. |
| Assistant | Reserved for special requirements.  If necessary, enable this function under the guidance of professionals. |
| Pan | Select Pan from the list, and then click Start . The PTZ starts to pan. |
| Go to | <ul style="list-style-type: none"> Select Go to from the list, enter horizontal angle value, vertical angle value and zoom, and then click Go to. The Device will turn to the position you want. One unit of the horizontal angle value or vertical angle value you enter equals 0.1 degree. |

Menu

For the menu interface, see Figure 2-20. For the parameter description, see Table 2-8.

Figure 2-20 Menu interface

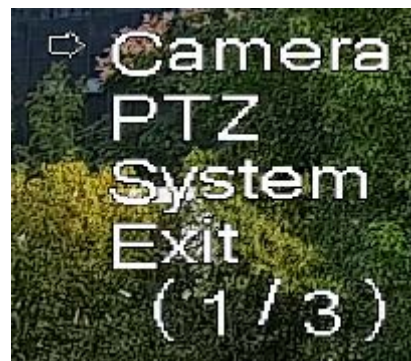


Table 2-8 Menu parameter description

| Parameter | Description |
|-------------------|--|
| Direction Buttons | Click the up and down buttons to select parameters, and click the left and right buttons to select parameter values. |
| OK | Confirmation button. |
| Open | Open the OSD menu. |
| Close | Close the OSD menu. |

Click **Open** to open the OSD menu. The OSD menu is displayed on the live view.

Figure 2-21 OSD menu



You can finish the following settings through the menu.

- Camera settings: For details, see "5.1 Camera".
- PTZ settings: For details, see "5.4 PTZ Settings".
- System management: For details, see "5.7 System Management".

2.6 PTZ Status

On the **Live** interface, the PTZ status is displayed at the lower right corner.



The function is available on select models.

Figure 2-22 PTZ status



When the PTZ lifespan is close to the threshold, a warning will be displayed on the **Live** interface.

Figure 2-23 Warning (1)

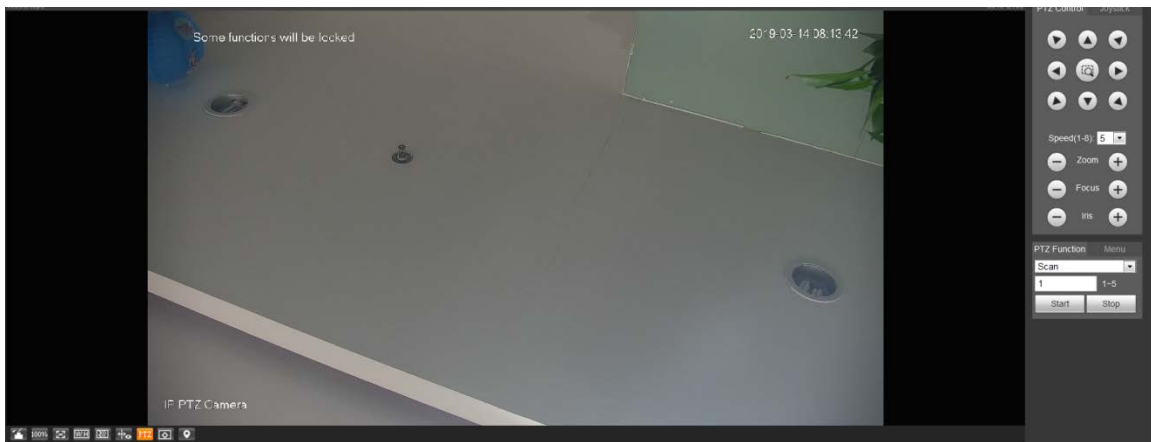


Figure 2-24 Warning (2)



3 AI Live

You can check the information of the detected human faces, human bodies, motor vehicles, and non-motor vehicles.



This function is available on select models.

3.1 AI Live Interface

For the **AI Live** interface, see Figure 3-1. For the layout description, see Table 3-1.

Figure 3-1 AI live interface

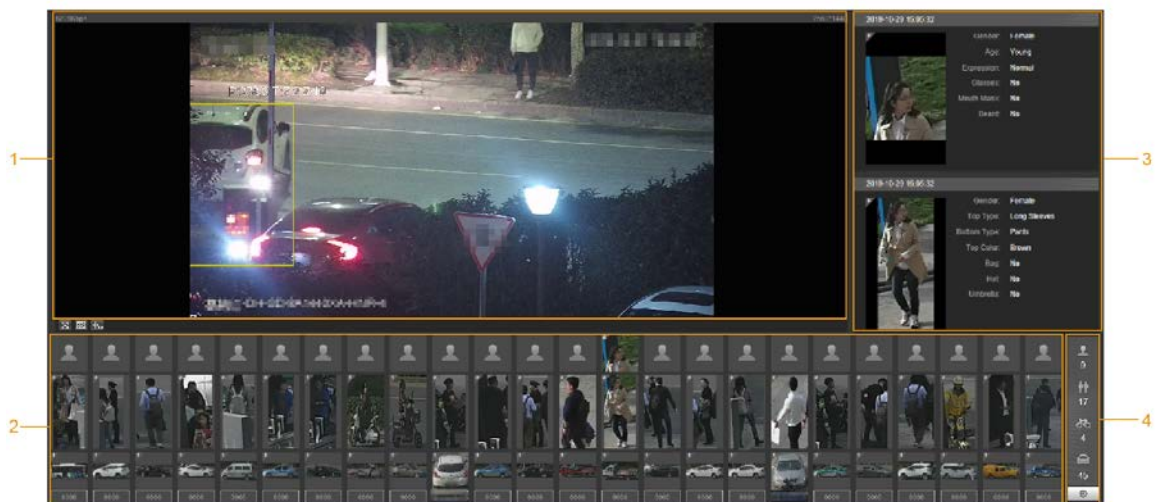



Table 3-1 AI live interface description

| No. | Function |
|-----|--|
| 1 | Live view |
| 2 | Snapshot display area |
| 3 | Information display area of detected targets |
| 4 | Statistics area of the detected targets |

3.1.1 Information Display Area of Detected Targets

This area displays the information of the captured targets in real time.

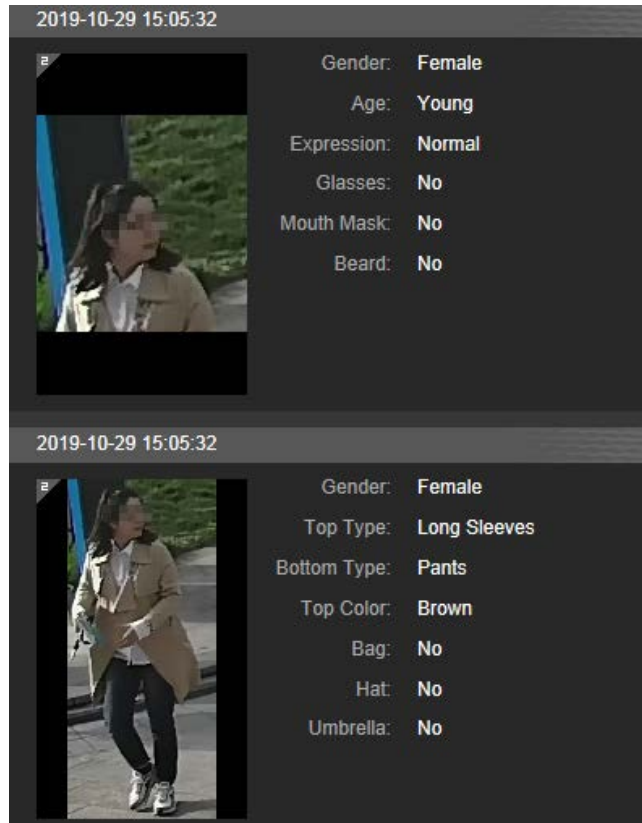Figure 3-2 Information display of the detected targets



3.1.2 Snapshot Display Area

This area displays the snapshots of the detected targets. Click any snapshot to view the information of the detected target in information display area.

Figure 3-3 Snapshot display area



3.1.3 Statistics Area of the Detected Targets

This area displays the number of the captured target in real time.

Figure 3-4 Statistics area of the detected targets



Table 3-2 Statistics area description of the detected targets

| Icon | Detected Target | Description |
|------|-------------------|---|
| | Face | Available detection items: Gender, age, expression, glasses, mouth mask, and beard. |
| | Human | Available detection items: Top, bottom, top color, bottom color, bag, hat, and umbrella. |
| | Non-motor vehicle | Available detection items: Vehicle type, vehicle body color, top, top color, occupancy, and hat. |
| | Motor vehicle | Available detection items: License plate, vehicle body color, vehicle type, vehicle logo, vehicle series, sunshield, seatbelt, smoking, calling, ornament, and annual inspection mark. Up to 7 items can be selected at the same time for motor vehicle detection. |
| | Settings | Click the button to select the detection items. |

3.2 AI Live Settings

Prerequisites

Select **Setting** > **Event** > **Smart Plan**, and then enable **Face Detection**, **Face Recognition** or **Video Metadata**.

For the method to enable the function, see "5.5.4 Smart Plan". For the operations, see "5.5.7 Face Recognition" or "5.5.10 Video Metadata".


Procedure

Step 1 Click the **AI Live** tab.

The **AI Live** interface is displayed. See Figure 3-5. The information display area of detected

targets is on the right side; the snapshot display area is on the bottom; the statistics area of the detected targets is on the lower right corner.

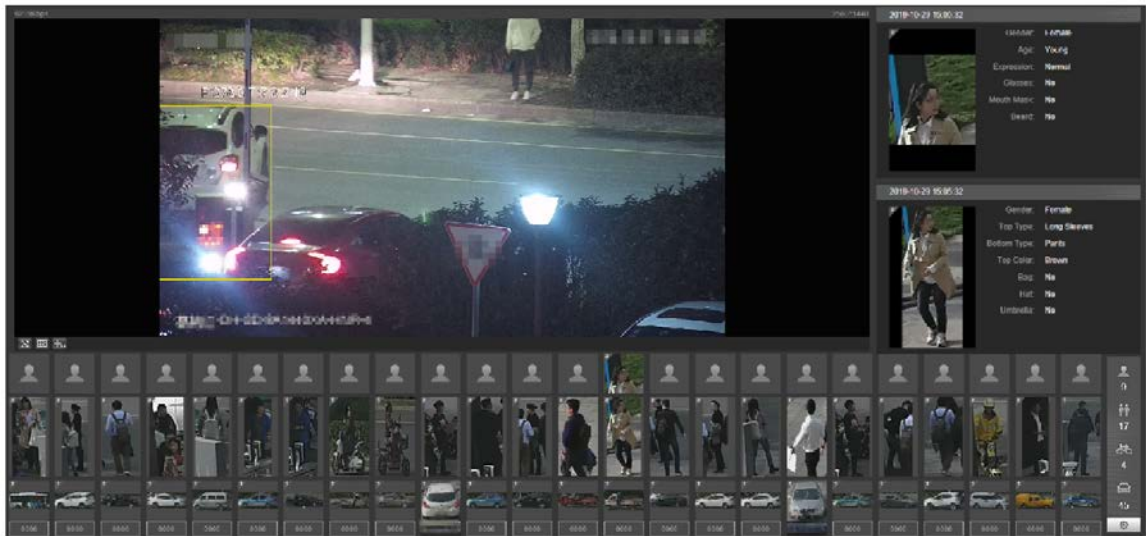Figure 3-5 AI live interface




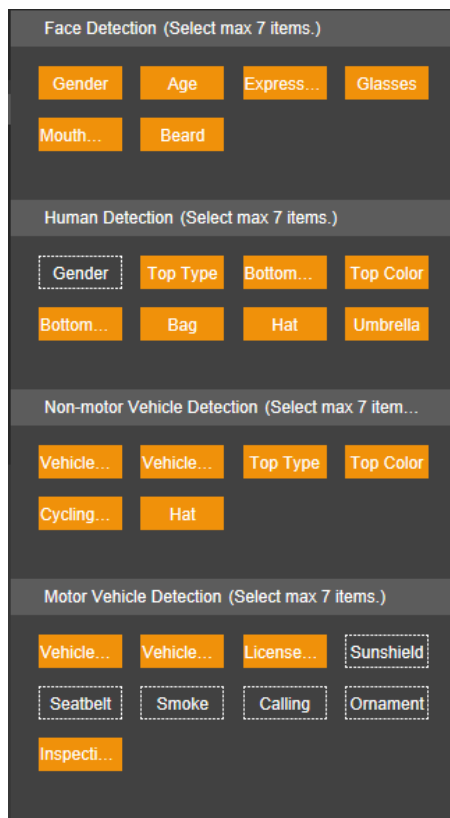

Step 2 Click  to set the detection items of the targets.

Figure 3-6 Detection items selection interface



Step 3 Click  to complete the configuration.

4 Playback


You can view the saved pictures and videos on the **Playback** interface.



Before using the function, you need to set the period, storage method, and record control of recording and snapshot first. For details, see "5.6 Storage".

Click the **Playback** tab, and the **Playback** interface is displayed.

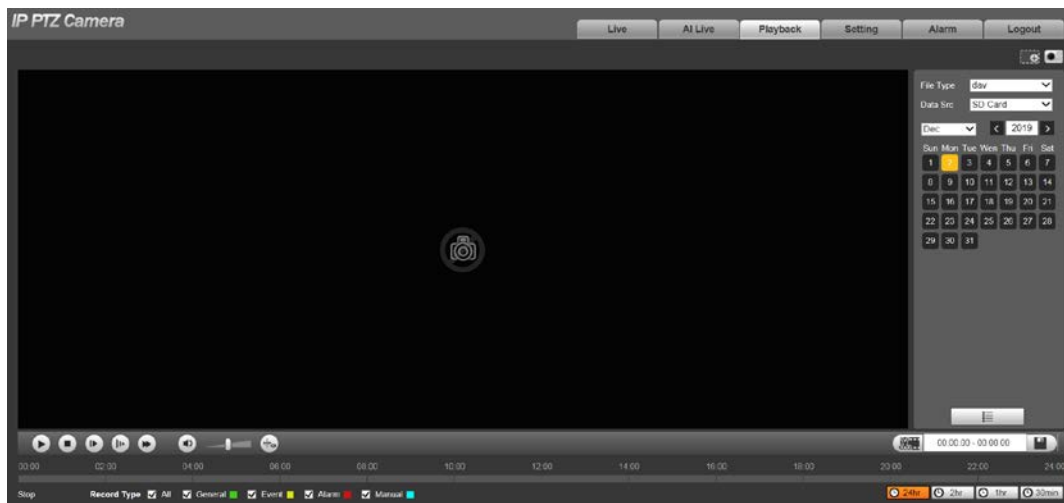Figure 4-1 Playback interface



4.1 Video Playback

Select **dav** from the **File Type** list, and the video playback interface is displayed. See Figure 4-2. For parameter description, see Table 4-1.

Figure 4-2 Video playback

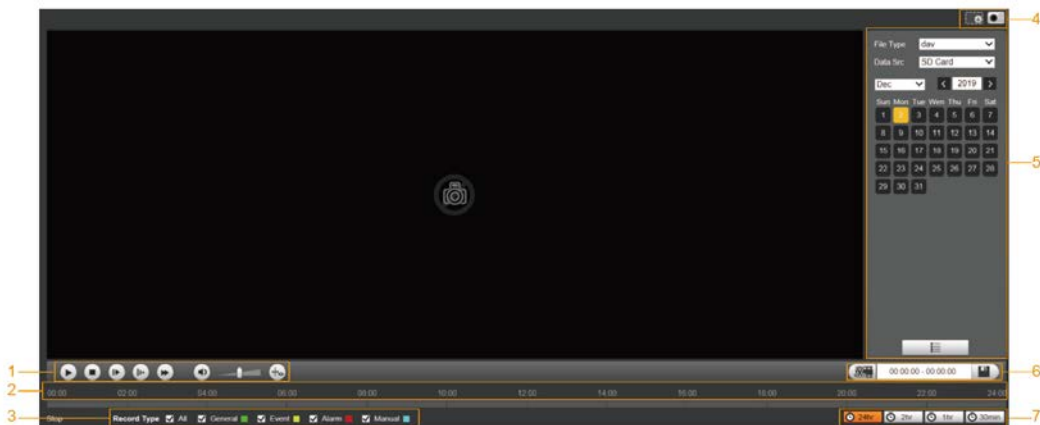


Table 4-1 Video playback parameter description

| No. | Description |
|-----|----------------------------|
| 1 | Video playing function bar |

| No. | Description |
|-----|---|
| 2 | Progress bar |
| 3 | Recording types |
| 4 | Auxiliary functions |
| 5 | Video playback file search and display area |
| 6 | Video clipping area |
| 7 | Progress bar time formats |

4.1.1 Video Play Function Bar

For the video playing function bar, see Figure 4-3. For the parameter description, see Table 4-2.

Figure 4-3 Video playing function bar

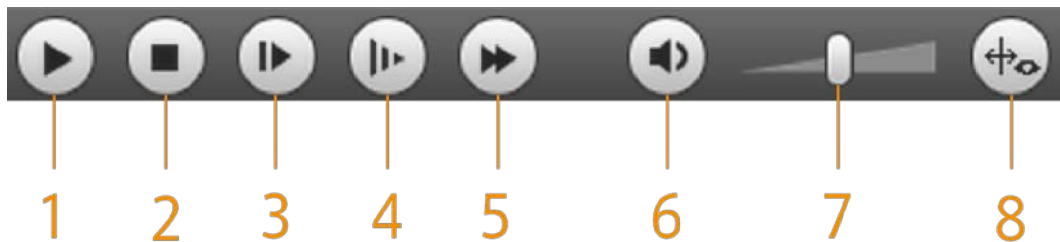



Table 4-2 Video play function bar description

| No. | Parameter | Description |
|-----|------------|--|
| 1 | Play | Play the video. |
| 2 | Stop | Stop playing the video. |
| 3 | Next Frame | Play the next frame.  You need to pause the playback before playing the next frame. |
| 4 | Slow | Slow down video playing. |
| 5 | Fast | Speed up video playing. |
| 6 | Sound | Mute or unmute the sound. |
| 7 | Volume | Adjust the volume. |
| 8 | Rules Info | Click this button, and smart rules will be displayed on the video playback interface if the smart rules are enabled. |

4.1.2 Recording Type

Select a recording type, and then only files of the selected types will be displayed in the progress bar and file list.

Figure 4-4 Recording type



4.1.3 Auxiliary Functions

For the auxiliary functions, see Figure 4-5. For the parameter description, see Table 4-3.

Figure 4-5 Auxiliary functions



Table 4-3 Auxiliary functions parameter description

| No. | Parameter | Description |
|-----|--------------|---|
| 1 | Digital Zoom | <ul style="list-style-type: none"> Click the button, and then select an area in the live view to zoom in; right-click on the image to restore to the original status. In zoomed-in status, drag the image to check other areas. Click the button, and then scroll the mouse wheel in the live view to zoom in or out. |
| 2 | Snapshot | Click the button, and then you can take snapshots of the video in playback, and save them in the playback snapshot path set in "5.1.2.5 Path". |

4.1.4 Video Playback File Search and Display Area

There are videos and snapshots on days with blue shading. See Figure 4-6. For the parameter description, see Table 4-4.

Figure 4-6 Playback file (1)

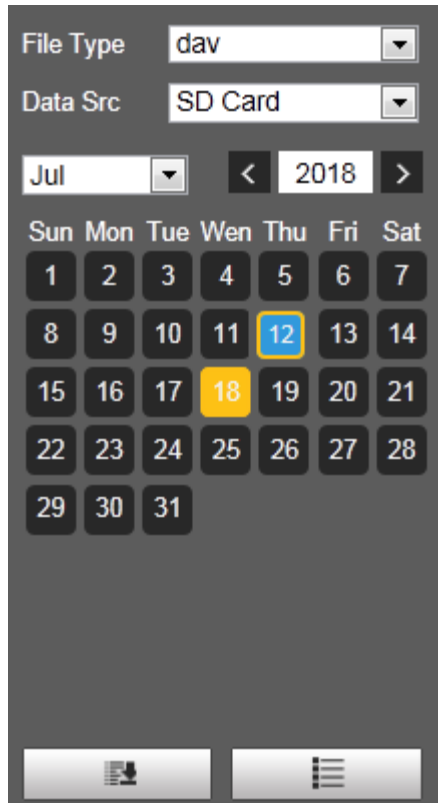





Table 4-4 Playback file parameter description (1)


| Parameter | Description |
|---|--|
| File Type | <ul style="list-style-type: none"> To play back a recording, select dav. To play back a picture, select jpg. |
| Data Src | The SD Card is used by default. |
|  | <p>Click this button, and recordings or pictures of a certain type on specific dates can be downloaded in batches.</p> <p></p> <p>The function is available on select models.</p> |
|  | File list. Click this button, and the recording files on the selected day will be displayed in the list. |

4.1.4.1 Download Files in Batches

Step 1 Click .

The **Batch Download** interface is displayed.

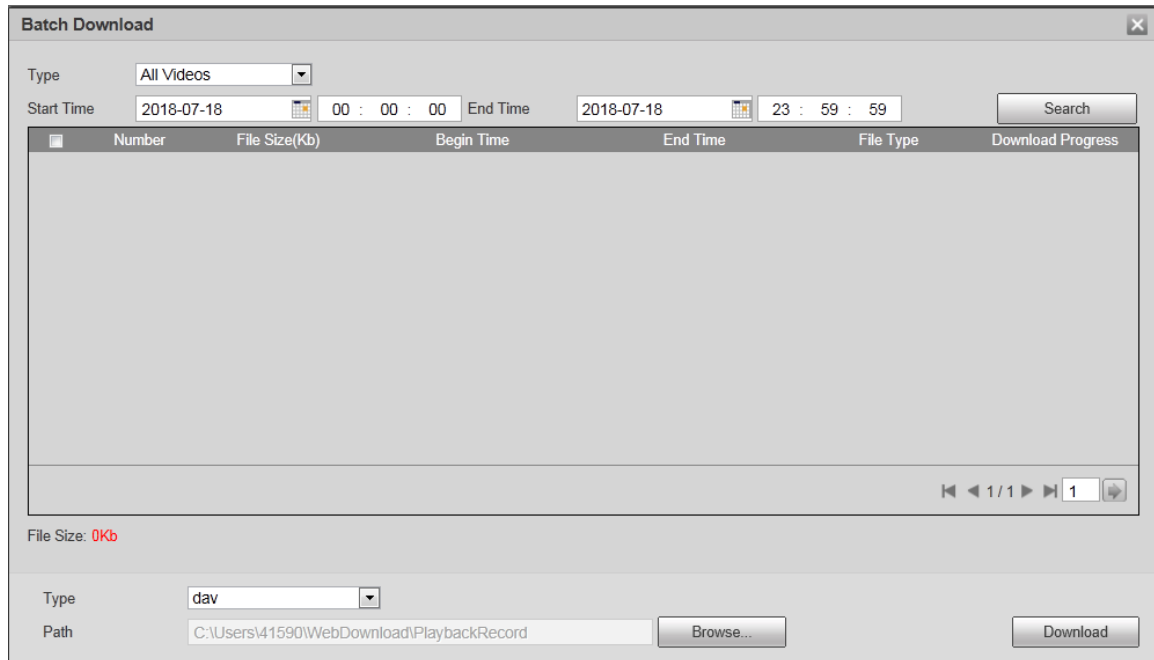Figure 4-7 Batch download



Step 2 Configure parameters as needed.

Table 4-5 Batch download parameters description

| Parameter | Description |
|---------------------|--|
| Type | Select the event type that triggers video recording. All Videos, General, Event, Alarm, Manual, and Snapshot are selectable. It is All Videos by default. |
| Start Time/End Time | Select the start time and end time for video searching. |
| File Type | Select the video type. dav and mp4 are selectable. It is dav by default. |
| Path | Click Browse , and set the saving path for video files. The default path is C:\Users\admin\WebDownload\PlaybackRecord. |

Step 3 Click **Search** to search for the video files that meets the requirements.

Step 4 Select the video, and then click **Download**.

The video files are downloaded and saved in the saving path.



You can select multiple files to download them.


4.1.4.2 Displaying File List


Step 1 Click a day with blue shading, and recording file progress bar with different colors is displayed on the time axis.

- Green: Represents general videos.
- Yellow: Represents motion detection videos.
- Red: Represents alarm videos.
- Blue: Represents manually recorded videos.

Step 2 Click anywhere on the progress bar, and the video will be played from that time.

Figure 4-8 Progress bar



Step 3 Click , and videos recorded on the selected day will be displayed in a list. For the playback file list, see Figure 4-9. For the parameter description, see Table 4-6.



To play back a file in the list, double-click the file.

Figure 4-9 Playback file (2)

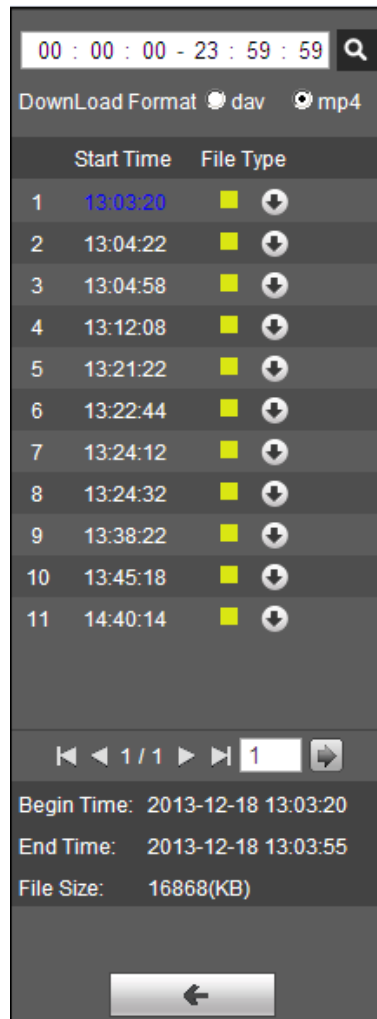






Table 4-6 Playback file parameter description (2)

| Parameter | Description |
|---|--|
|  | Search all the recorded files from the start time to the end time on the selected date. |
| Download Format | There are two options: dav and mp4 . |
|  | Click the download button, and the files will be saved to the storage path set in "5.1.2.5 Path".  Downloading and playing video at the same time is not supported. |
|  | Click the button to go back to the calendar interface. |


4.1.5 Video Clipping Area


You can clip the videos in this area.

Figure 4-10 Video clipping



Step 1 Click the time axis to select the start time for video clipping. The time must be within the progress bar range.


Step 2 Hover over , and then **Select start time** is displayed.


Step 3 Click  to set the start time for video clipping.


Step 4 Click the time axis to select the end time for video clipping.



The time must be within the progress bar range.

Step 5 Hover over , and then **Select end time** is displayed.

Step 6 Click  to set the end time for video clipping.

Step 7 Click , and the clipped video will be saved in the path set in "5.1.2.5 Path".





4.1.6 Progress Bar Time Formats

For the progress bar time format, see Figure 4-11. For the parameter description, see Table 4-7.

Figure 4-11 Progress bar time formats



Table 4-7 Progress bar time format description

| Parameter | Description |
|---|---|
|  | Click the button, and then the progress bar displays the recordings in 24-hour mode. |
|  | Click the button, and then the video within the selected 2-hour period is displayed. |
|  | Click the button, and then the video within the selected 1-hour period is displayed. |
|  | Click the button, and then the video within the selected 30-minute period is displayed. |

4.2 Picture Playback

Select **jpg** from the **File Type** list. For the picture playback interface, see Figure 4-12. For the parameter description, see Table 4-8.

Figure 4-12 Picture playback

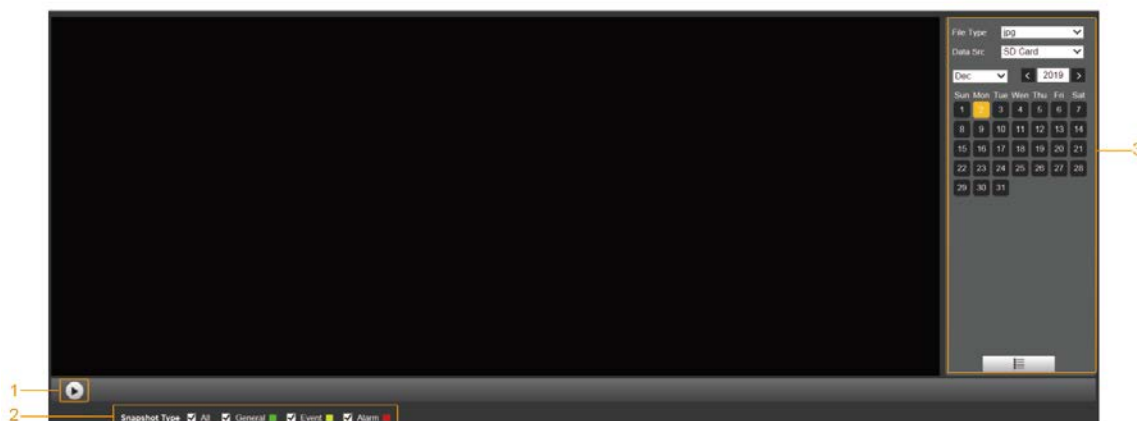


Table 4-8 Picture playback parameter description


| No. | Description |
|-----|---|
| 1 | Picture playing functions |
| 2 | Snapshot types |
| 3 | Picture playback file search and display area |




4.2.1 Picture Playing Functions

For the picture playing buttons, see Figure 4-13.

Figure 4-13 Picture playing buttons



The status button is displayed as  by default, indicating the picture play is paused or no picture is being played.

- To play the picture, click , and the button is switched to .
- To pause the picture play, click .

4.2.2 Picture Playback File Search and Display Area

For the playback file interface, see Figure 4-14 and Figure 4-15. For the description of buttons on the interface, see Table 4-9.

Figure 4-14 Playback file (1)

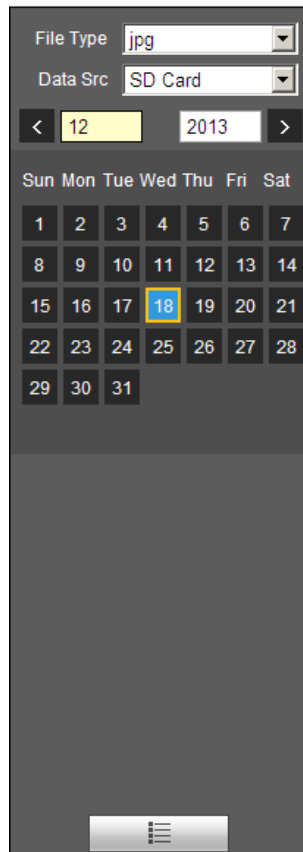


Table 4-9 Button description



| Parameter | Description |
|---|--|
| File Type | Select jpg from the File Type list, and the picture will be played if any. |
| Data Src | The SD Card is selected by default. |
|  | File list. Click this button, and the recording files on the selected day will be displayed in the list. |




Figure 4-15 Playback file (2)



Step 1 Click , and the snapshots on a selected day will be displayed in a list.

Step 2 To play back a snapshot, double-click the corresponding file.


Table 4-10 Playback file parameter description

| Parameter | Description |
|---|--|
|  | Search all the snapshots from the start time to the end time on the selected date. |
|  | Click the button to download the snapshot to local storage. |
|  | Click the button to go back to the calendar interface. |

4.2.3 Snapshot Types

After you select a snapshot type, only the files of the selected type are displayed in the file list.

Figure 4-16 Snapshot types



5 Setting

5.1 Camera

5.1.1 Conditions Settings

This section describes how to set camera attributes and manage profiles.


5.1.1.1 Conditions

5.1.1.1.1 Picture

You can set camera attributes and picture parameters to achieve the best display effect.

Step 1 Select **Setting > Camera > Conditions > Conditions > Picture**.



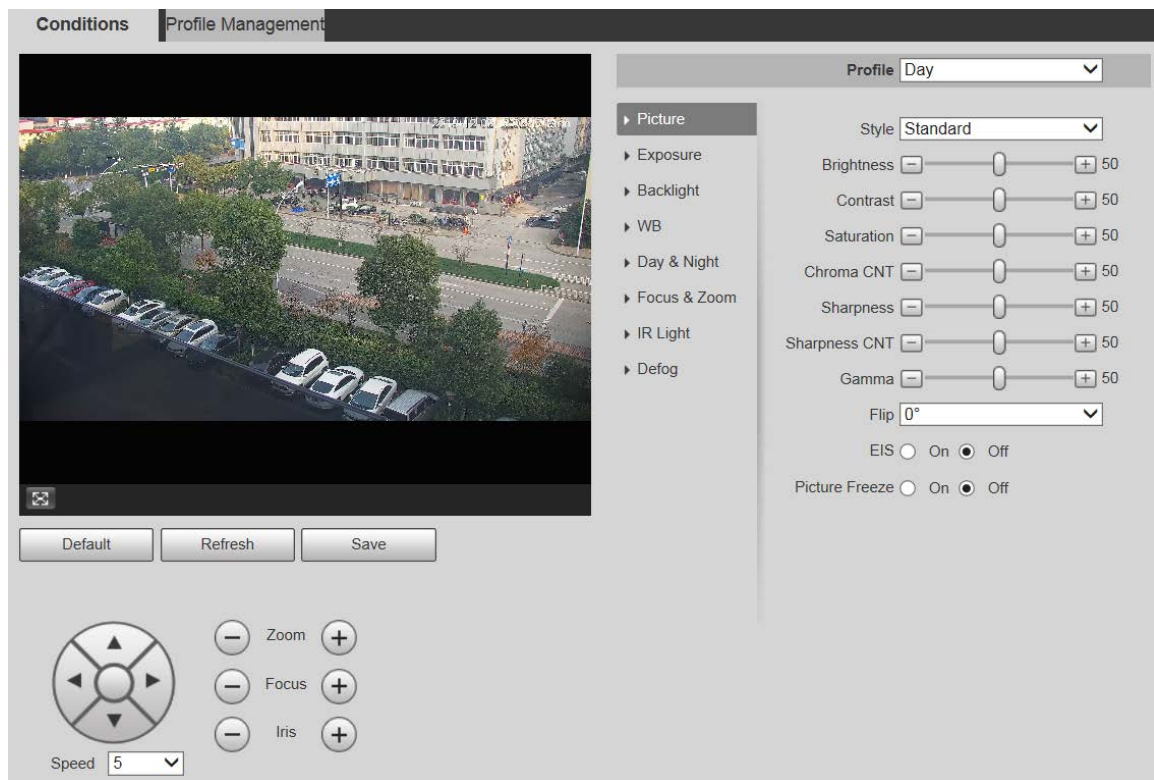

Figure 5-1 Picture interface



Step 2 Configure parameters as needed.

Table 5-1 Picture setting parameter description

| Parameter | Description |
|-----------|---|
| Profile | There are three options: General , Day , and Night . You can view the configurations and the effect of the selected mode. Day is selected by default. |
| Style | Set the image display style. There are three options: Soft , Standard , and Vivid . Standard is selected by default. |

| Parameter | Description |
|----------------|---|
| Brightness | Set the overall image brightness. The larger the value is, the brighter the image will be. The value ranges from 0 to 100. |
| Contrast | Set the image contrast. The larger the value is, the greater the contrast will be. The value ranges from 0 to 100. |
| Saturation | Set the intensity of colors. The larger the value is, the brighter the colors will be. The value ranges from 0 to 100. |
| Chroma CNT | <p>The larger the value, the higher suppression on image colors. The value ranges from 0 to 100.</p>  <p>This parameter takes effect only when the Device is in the environment with low luminance.</p> |
| Sharpness | <p>Set the sharpness of picture edges. The larger the value is, the more obvious the edge will be. The value ranges from 0 to 100.</p>  <p>If the value is too large, there might be image noise. Set the value according to the actual condition.</p> |
| Sharpness CNT | <p>The larger the value is, the stronger the sharpness CNT will be. The value ranges from 0 to 100.</p>  <p>This parameter takes effect only when the Device is in the environment with low luminance.</p> |
| Gamma | Change image brightness through non-linear tuning to expand the dynamic display range of images. The larger the value is, the brighter the image will be. The value ranges from 0 to 100. |
| Flip | <p>Monitoring videos can be flipped over. There are two options.</p> <ul style="list-style-type: none"> ● 0°: The monitoring video is normally displayed. It is 0° by default. ● 180°: The monitoring video is flipped over. |
| EIS | <p>Electronic image stabilization (EIS) is used to effectively solve the problem of image shaking during use, thus presenting clearer images. It is Off by default.</p>  <ul style="list-style-type: none"> ● This function is available on select models. ● This parameter takes effect only when the Device is in the environment with low luminance. ● Optical image stabilization and electronic image stabilization cannot be enabled at the same time. |
| Picture Freeze | After you select On , the image at the called preset is displayed directly if you call a preset or tour, and no images during the rotation of the Device are displayed. |

Step 3 Click **Save**.

5.1.1.1.2 Exposure

You can control the amount of light per unit area reaching the electronic image sensor by adjusting parameters on the **Exposure** interface.

Step 1 Select **Setting > Camera > Conditions > Conditions > Exposure**.

Figure 5-2 Exposure—auto mode

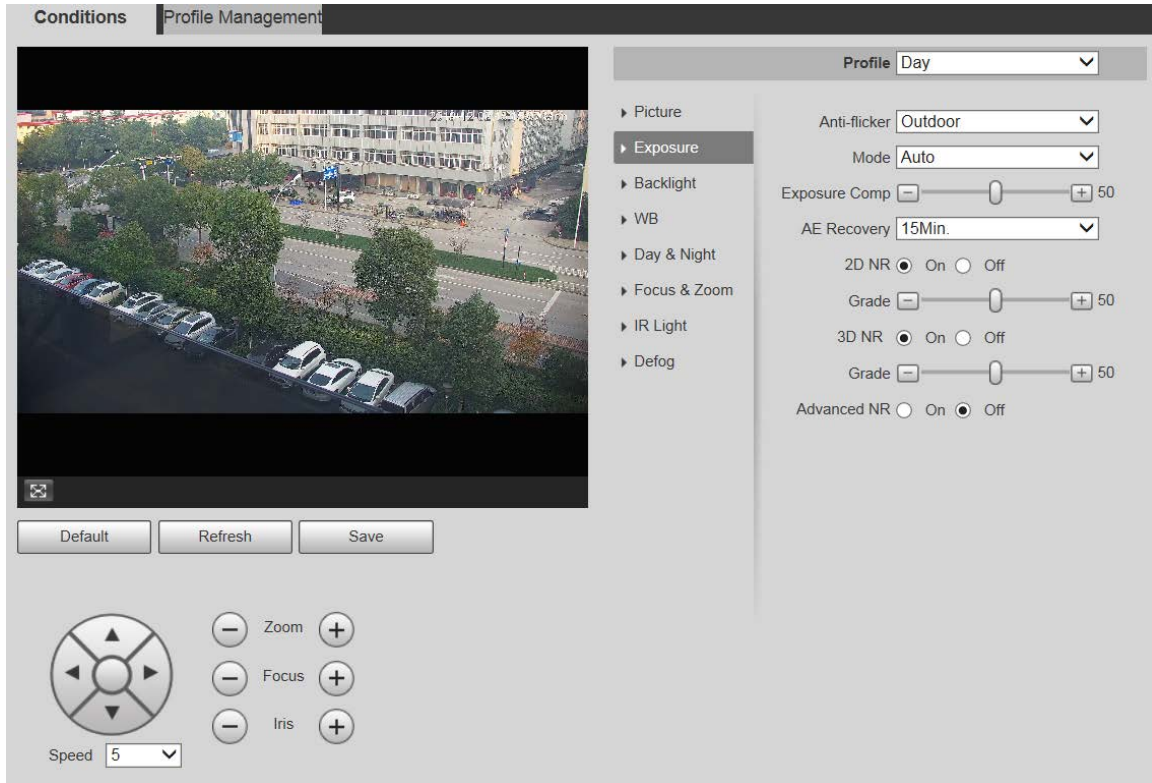


Figure 5-3 Exposure—aperture priority mode

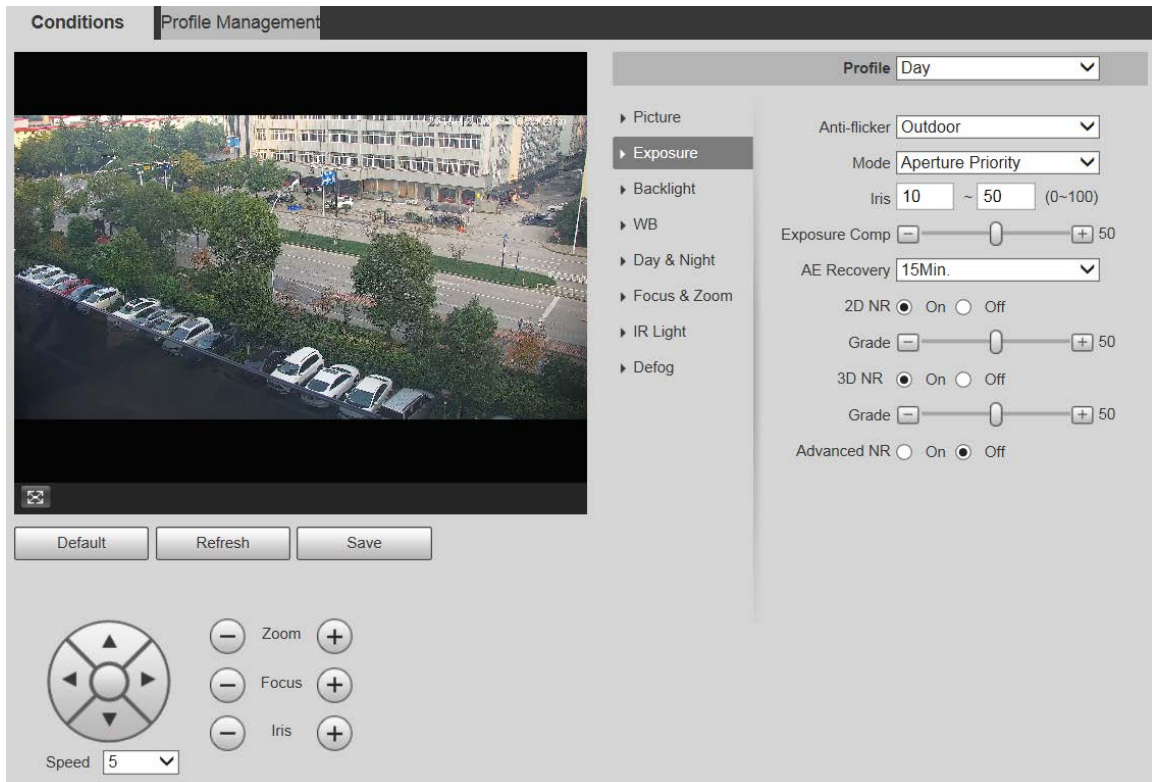


Figure 5-4 Exposure—shutter priority mode

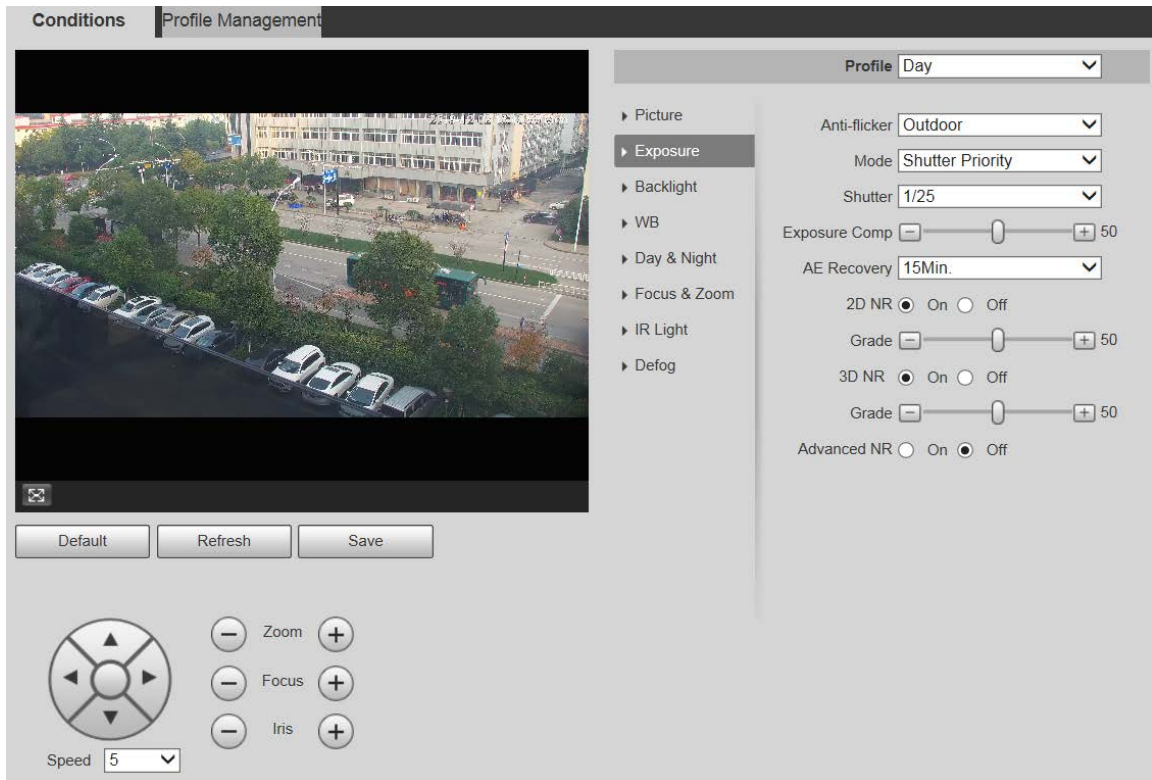


Figure 5-5 Exposure—gain priority mode


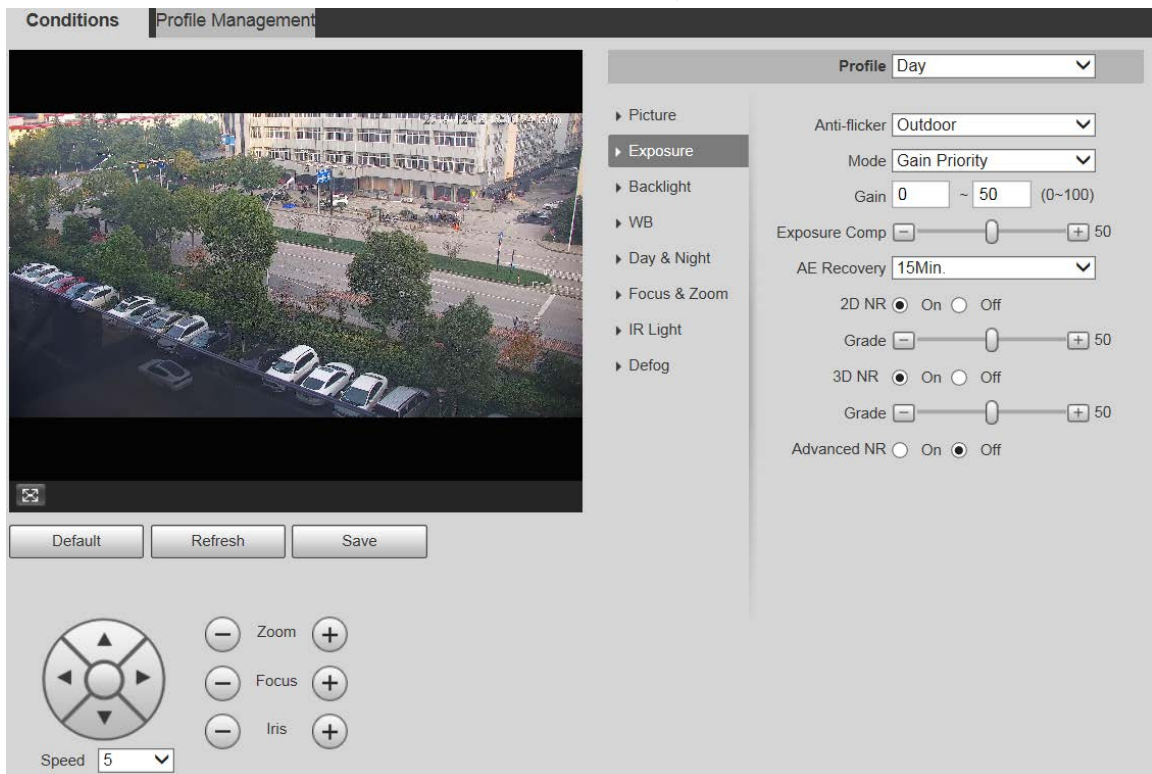



Figure 5-6 Exposure—manual mode

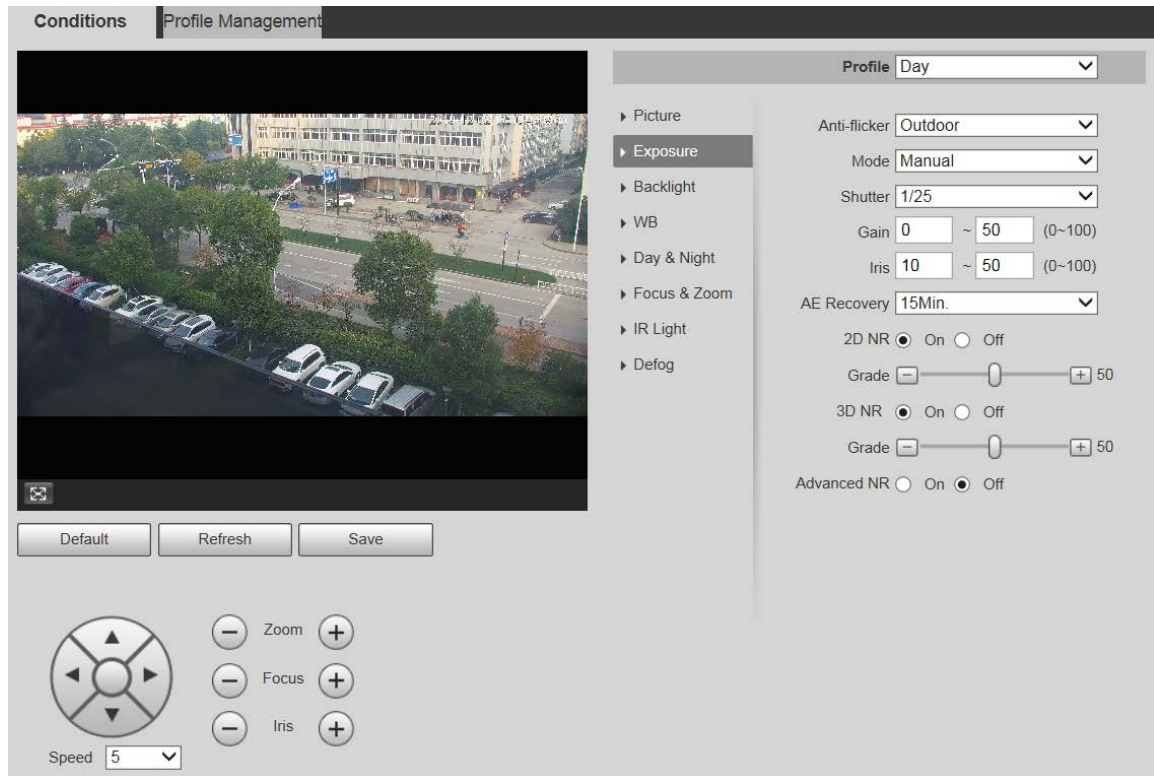

Step 2 Configure parameters as needed.

Table 5-2 Exposure setting parameter description

| Parameter | Description |
|--------------|---|
| Anti-flicker | <p>You can select 50Hz, 60Hz, or Outdoor from the list.</p> <ul style="list-style-type: none"> • 50Hz: When the alternating current is 50Hz, the exposure is automatically adjusted to make sure that there are no stripes on images. • 60Hz: When the alternating current is 60Hz, the exposure is automatically adjusted to make sure that there are no stripes on images. • Outdoor: You can switch the modes to achieve the effect you want. |

| Parameter | Description |
|---------------|---|
| Mode | <p>Set the exposure modes. You can select Auto, Manual, Aperture Priority, Shutter Priority, or Gain Priority. The Auto mode is selected by default.</p> <ul style="list-style-type: none"> • Auto: Exposure is automatically adjusted according to scene brightness if the overall brightness of images is in the normal exposure range. • Manual: You can adjust the Gain, Shutter, and Iris value manually. • Aperture Priority: You can set the iris to a fixed value, and the Device adjusts shutter value then. If the image brightness is not enough and the shutter value has reached upper or lower limit, the system adjusts gain value automatically to ensure the image is at ideal brightness. • Shutter Priority: You can customize the shutter range. The Device automatically adjusts the aperture and gain according to the scene brightness. • Gain Priority: Gain value and exposure compensation value can be adjusted manually. |
| Gain | You can set the exposure gain. The value ranges from 0 to 100. |
| Shutter | You can adjust the exposure time of the Device. The larger the shutter value, the brighter the image. |
| Iris | You can set the Device luminous flux. The larger the iris value, the brighter the image. |
| Exposure Comp | You can set the exposure compensation value. The value ranges from 0 to 100. |
| AE Recovery | Automatic exposure is an automated digital camera system that adjusts the aperture and shutter speed, based on the external lighting conditions for images and videos. If you have selected an AE Recovery time, the exposure mode will be restored to the previous mode after you adjust the iris value. There are five options: Off , 5Min , 15Min , 1Hour , and 2Hour . |
| 2D NR | 2D noise reduction is the process of removing noise from a signal. The higher the grade is, the less the noise will be, and images appear to be blurrier. |
| 3D NR | 3D noise reduction is the process of removing noise from a signal. The higher the grade is, the less the noise will be, and images appear to be blurrier. |
| Grade | Noise reduction grade. The value ranges from 0 to 100. The larger the value is, the less the noise will be. |
| Advanced NR | <p>Realize noise suppression effect through 3D and 2D video filtering method.</p>  <p>The function is available on select models.</p> |

Step 3 Click **Save**.

5.1.1.1.3 Backlight




The backlight function cannot be configured if defog function is enabled. There will be a prompt on the interface.

You can use this function to adjust the backlight compensation mode of the monitoring screen.

Step 1 Select **Setting > Camera > Conditions > Conditions > Backlight**.

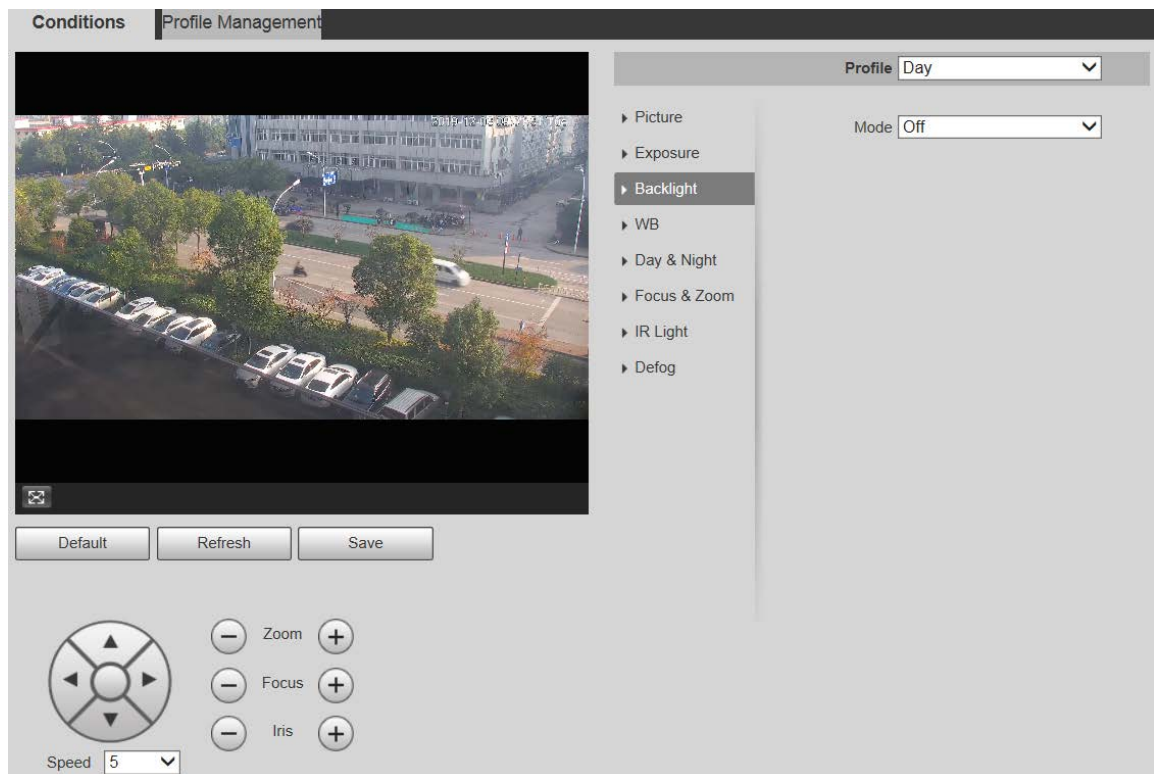Figure 5-7 Backlight settings



Step 2 Select a backlight mode from the list.

There are 4 options: **Off**, **BLC**, **HLC**, and **WDR**.

- **Off**: Backlight is disabled.
- **BLC**: Backlight compensation corrects regions with extremely high or low levels of light to maintain a normal and usable level of light for the object in focus.
- **HLC**: Highlight compensation dims strong light, so that the Device can capture details of faces and license plates in extreme light conditions. It is applicable to the entrance and exit of toll stations or parking lots.
- **WDR**: When in WDR (Wide Dynamic Range) mode, the Device constrains over bright areas and compensates dark areas to improve the image clarity.

Step 3 Click **Save**.




If you select **Off**, other backlight mode configurations will not be effective.

5.1.1.1.4 WB

In this mode, you can make a white object displaying itself clearly on the video image in all environments.

Step 1 Select **Setting > Camera > Conditions > Conditions > WB.**

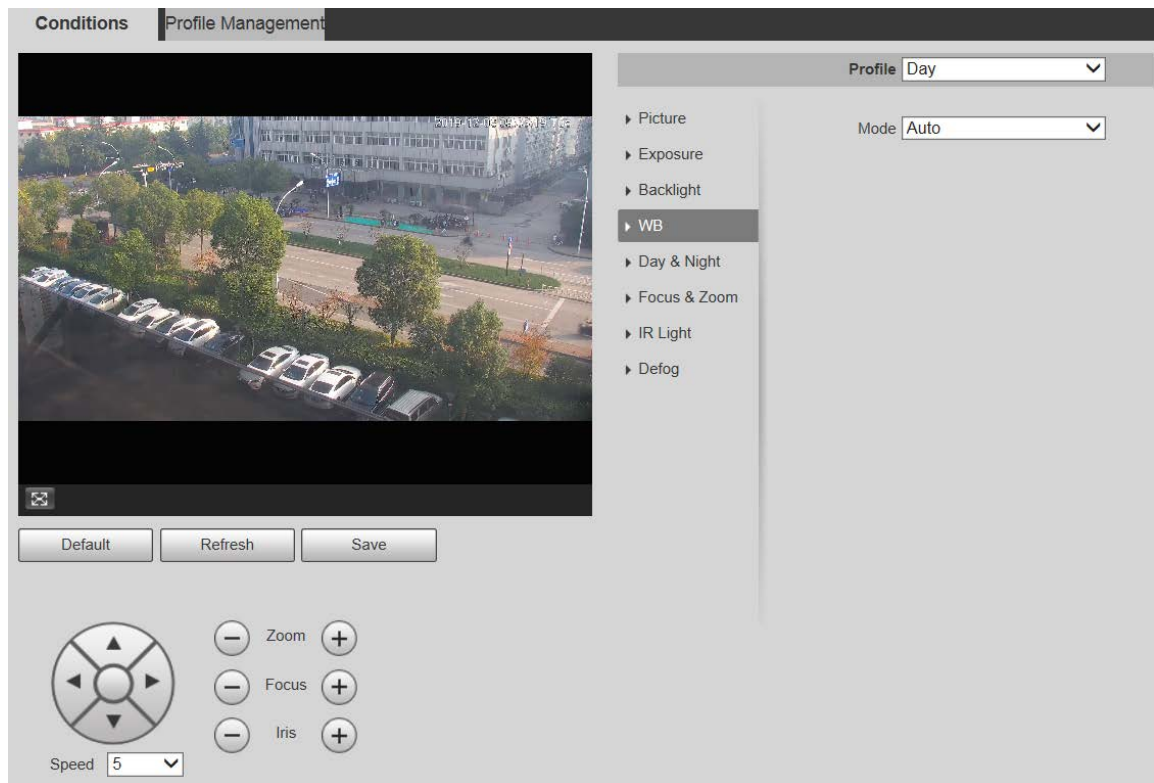Figure 5-8 WB settings



Step 2 Select WB mode from the list.

You can select from **Auto, Indoor, Outdoor, ATW, Manual, Sodium Lamp, Natural,** and **Street Lamp. Auto** is selected by default.

Step 3 Click **Save.**

5.1.1.1.5 Day & Night


This function allows you to switch between the color mode and the black & white mode, ensuring clear monitoring screen in a dim environment.



Defog function cannot be configured if **Day & Night** function is enabled. There will be a prompt on the interface.



Step 1 Select **Setting > Camera > Conditions > Conditions > Day & Night.**

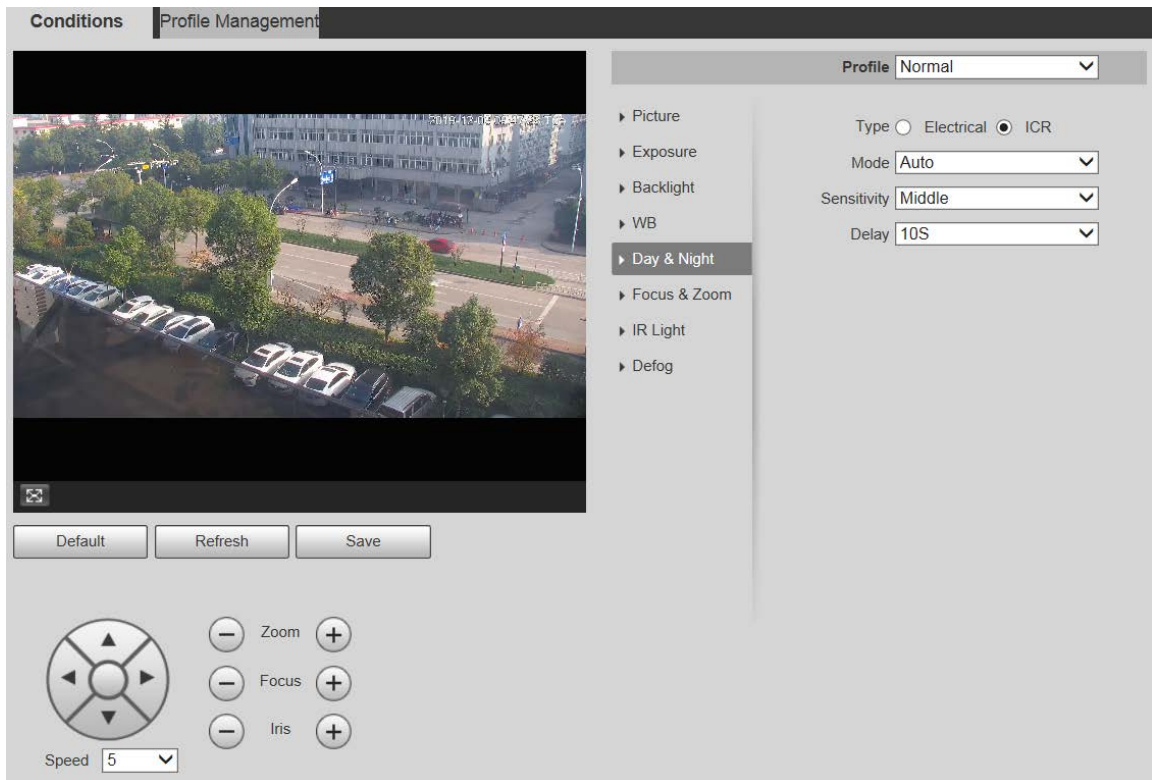Figure 5-9 Day & night settings



Step 2 Configure parameters as needed.

Table 5-3 Day & night parameter description

| Parameter | Description |
|-------------|---|
| Type | There are two options: Electrical and ICR . ICR is selected by default. <ul style="list-style-type: none"> • Electrical Image processing method is used for day & night switch. • ICR: IR filter is used for day & night switch. |
| Mode | Select a mode from the list (Your selection is independent from the profile). Auto is selected by default. <ul style="list-style-type: none"> • Color: The Device only outputs color images. • Auto: The Device outputs color images or black-and-white images according to ambient conditions. • B/W: The Device only outputs black-and-white images. |
| Sensitivity | Adjust the sensitivity to switch between different modes. There are three options: Low , Middle , and High .  You can set sensitivity only when Day & Night mode is set to Auto . |
| Delay | Adjust the delay time to switch between different modes. The value ranges from 2 s to 10 s.  You can set Delay only when Day & Night mode is set to Auto . |


Step 3 Click **Save**.

5.1.1.1.6 Focus & Zoom

Digital zoom refers to capturing a part of the image to magnify it. The higher the magnification is, the blurrier the images will become.

Step 1 Select **Setting > Camera > Conditions > Conditions > Focus & Zoom**.

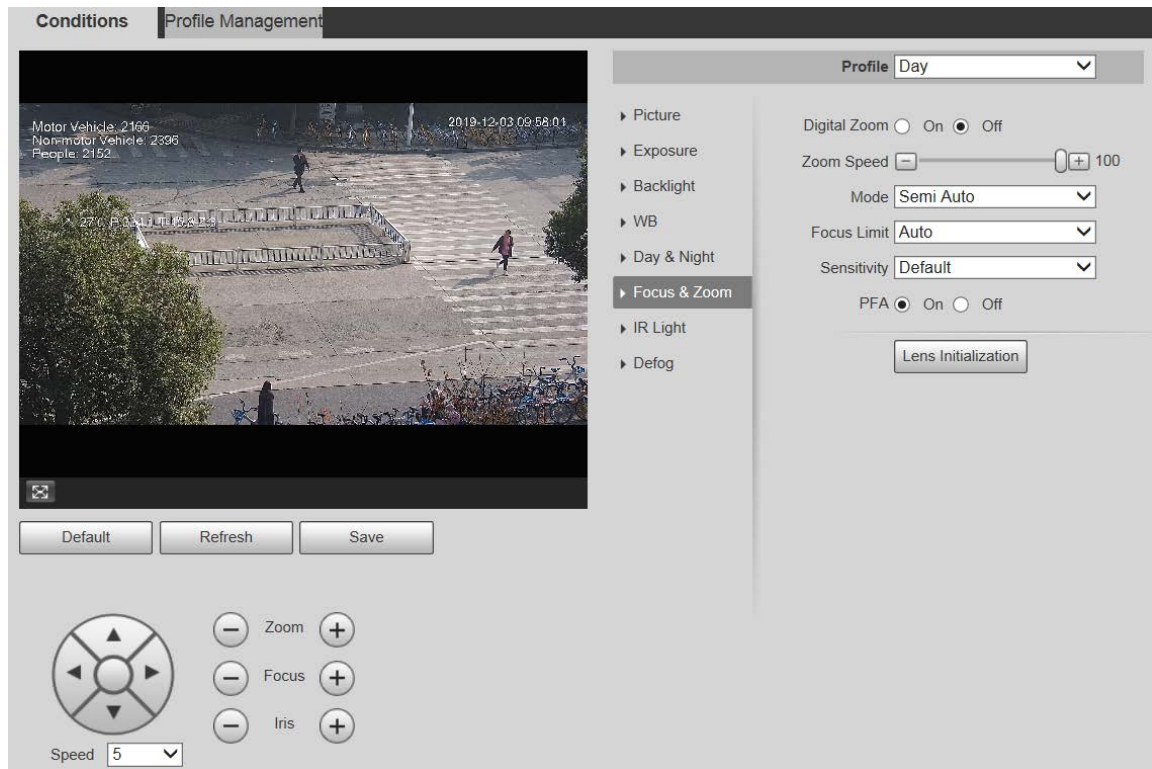Figure 5-10 Focus & zoom settings



Step 2 Configure each parameter as needed.

Table 5-4 Focus & zoom parameter description

| Parameter | Description |
|--------------|---|
| Digital Zoom | Select On or Off to enable or disable digital zoom. Off is selected by default. |
| Zoom Speed | The larger the value is, the faster the Device zooms. |
| Mode | Select the focus triggering mode. There are three options: Semi Auto , Auto , and Manual . Semi Auto is selected by default. <ul style="list-style-type: none"> • Semi Auto: The Device focuses automatically when zoom or ICR switch is detected. • Auto: The Device focuses automatically when scene changes, zoom, or ICR switch are detected. • Manual: The Device cannot focus automatically. You need to adjust the focus manually. |
| Focus Limit | You can select the shortest focus distance, which means the Device will focus on objects farther than the shortest focus distance. If you select Auto , the Device will select an appropriate shortest distance according to the zoom value. |

| Parameter | Description |
|---------------------|---|
| Sensitivity | Sensitivity is the capacity of resisting interference of the Device when focusing. The smaller the value is, the more capable the Device can resist interference when focusing. |
| PFA | If you enable this function, the image is relatively clear during zoom. If you disable this function, the speed is relatively high during zoom. |
| Lens Initialization | Click this button, and the lens will be initialized automatically. The lens will be extended to calibrate the zoom and focus. |

Step 3 Click **Save**.

5.1.1.1.7 IR Light

Common illuminators are classified into infrared IR lights, white lights, and laser lights. Different device models support different types of illuminators, and have different configuration interfaces. The actual interface shall prevail. This section describes how to configure these light types.

IR Light/White Light

These are the conditions for using IR light and white light.

- When the day & night mode is set to **B/W**, the monitoring screen is black and white. In this case, IR light is used.
- When the day & night mode is set to **Color**, the monitoring screen is colored. In this case, white light is used.
- When the day & night mode is set to **Auto**, the monitoring screen color changes with the ambient light condition, and the illuminator varies with the monitoring screen. In **B/W** mode, the IR light is turned on; in **Color** mode, the white light is turned on.



Some models are equipped with photoresistor that can turn on different types of illuminators based on the ambient brightness.

Perform the following steps to set illuminators.

Step 1 Select **Setting > Camera > Conditions > Conditions > IR Light**.

Figure 5-11 IR light settings—ZoomPrio

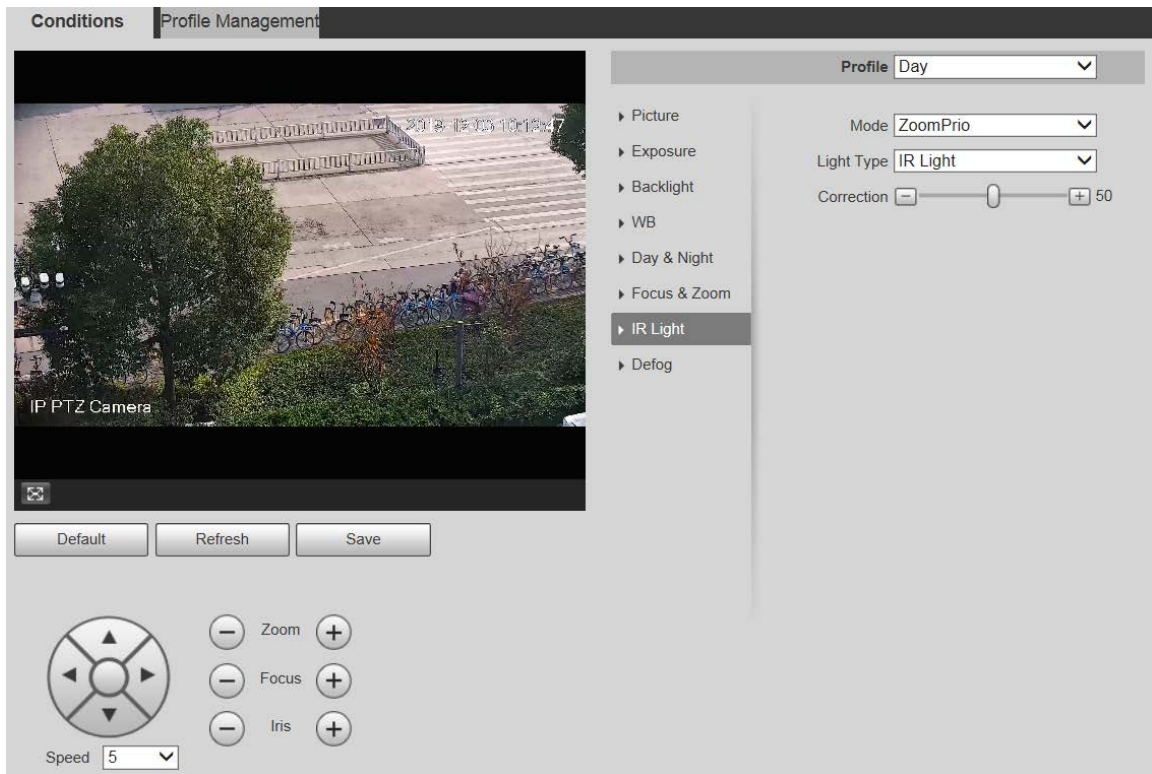


Figure 5-12 IR light settings—SmartIR

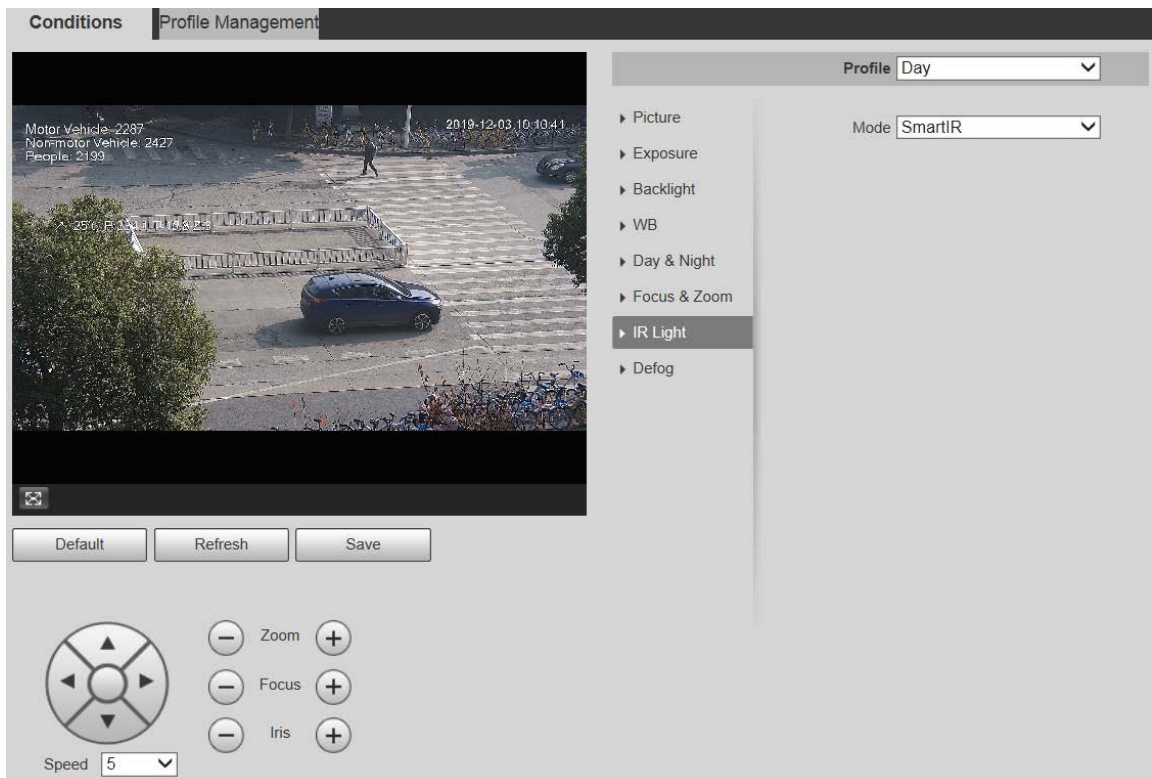


Figure 5-13 IR light settings—manual


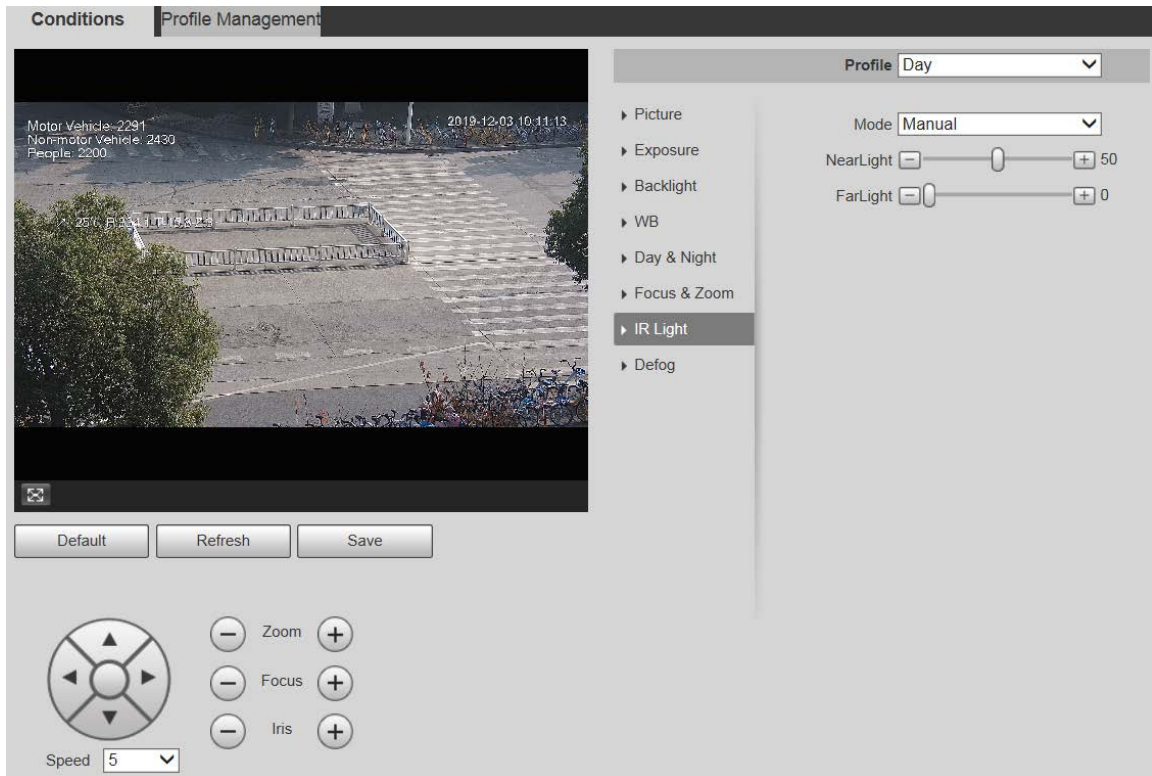



Figure 5-14 IR light setting—off

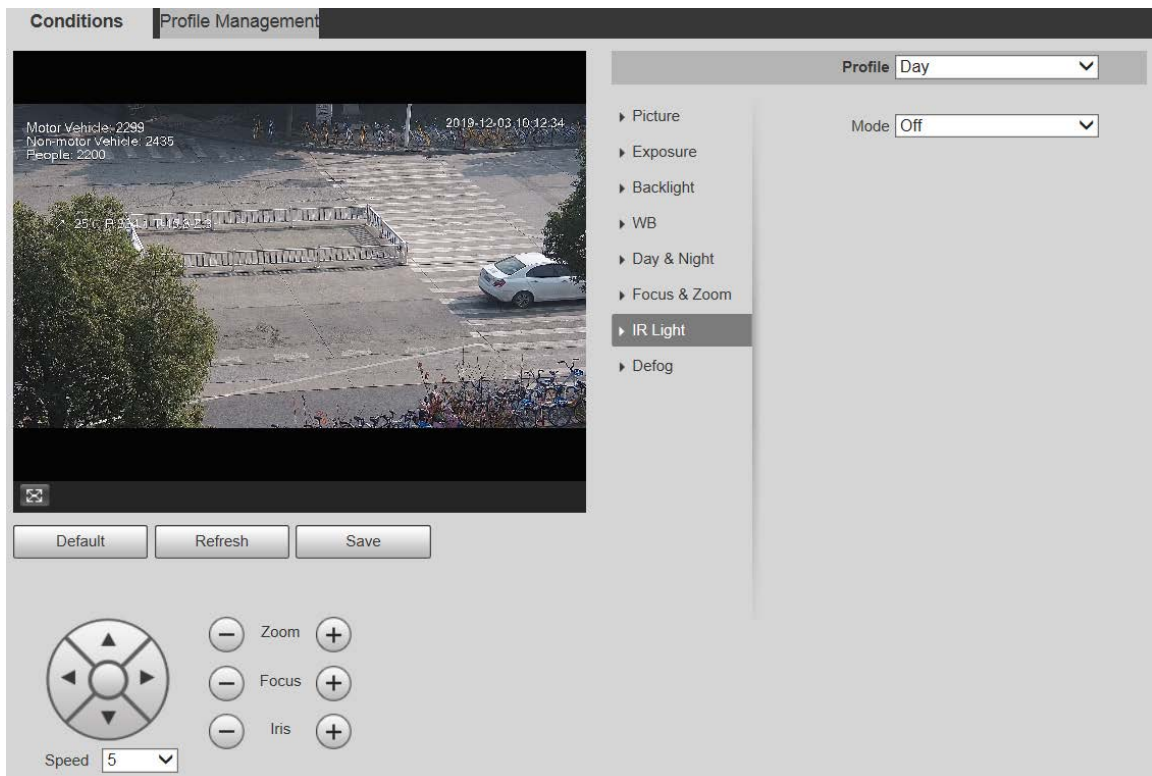

Step 2 Configure each parameter as needed.

Table 5-5 IR light parameter description

| Parameter | Description |
|------------|---|
| Mode | <p>There are 5 options: Manual, SmartIR, ZoomPrio, Timing, and Off.</p> <ul style="list-style-type: none"> • ZoomPrio: The system adjusts the IR light brightness automatically according to the zoom times. • SmartIR: The system controls the IR light intensity according to actual conditions. • Manual: Set IR light brightness manually. • Timing: Enable different light types in different time periods according to actual condition. • Off: Turn off the IR light. <p></p> <ul style="list-style-type: none"> • Some models do not support SmartIR, Manual, Timing, or Off. • In ZoomPrio mode, IR light and white light are supported, and IR light is selected by default. • In Timing mode, you can set four periods with different light types. • Only infrared IR light supports the SmartIR mode. • The IR light is turned off for cameras with low power consumption by default. Turn on the IR light if necessary. |
| Light Type | You can select IR Light or White Light . |
| Correction | Compensate for the brightness of the IR light. The value ranges from 0 to 100. |
| Near Light | Set the brightness of the near light. The value ranges from 0 to 100. |
| Far Light | Set the brightness of the far light. The value ranges from 0 to 100. |


Step 3 Click **Save**.

Laser Light

Laser light makes compensation for the ambient environment when it is used for long-distance monitoring.

Step 1 Select **Setting** > **Camera** > **Conditions** > **Conditions** > **IR Light**.

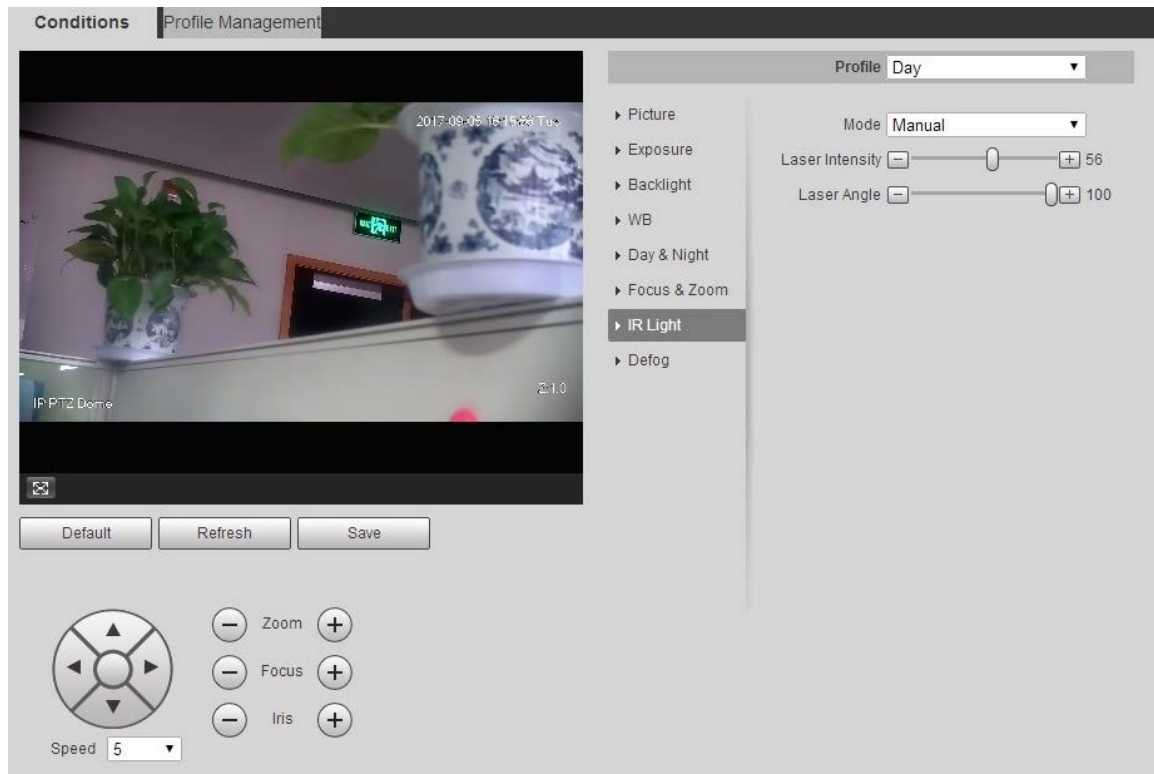Figure 5-15 Laser light settings



Step 2 Configure parameter as needed.

Table 5-6 Laser light setting parameter description

| Parameter | Description |
|-----------------|--|
| Mode | Select the laser light mode from ZoomPrio and Manual . It is ZoomPrio by default. <ul style="list-style-type: none"> • ZoomPrio: The Device can automatically adjust laser light brightness according to the zoom times. • Manual: Manually set laser light brightness and angle value. |
| Laser Intensity | Set the intensity of the laser light. The value ranges from 0 to 100. |
| Laser Angle | Set the angle value from 0 to 100. |

Step 3 Click **Save**.

5.1.1.1.8 Defog



The defog function cannot be configured if backlight function is enabled. There will be a prompt on the interface.

Image quality drops if the Device is installed in foggy or hazy environment. You can enable defog to improve image quality.

Step 1 Select **Setting > Camera > Conditions > Conditions > Defog**.

Figure 5-16 Defog settings—manual


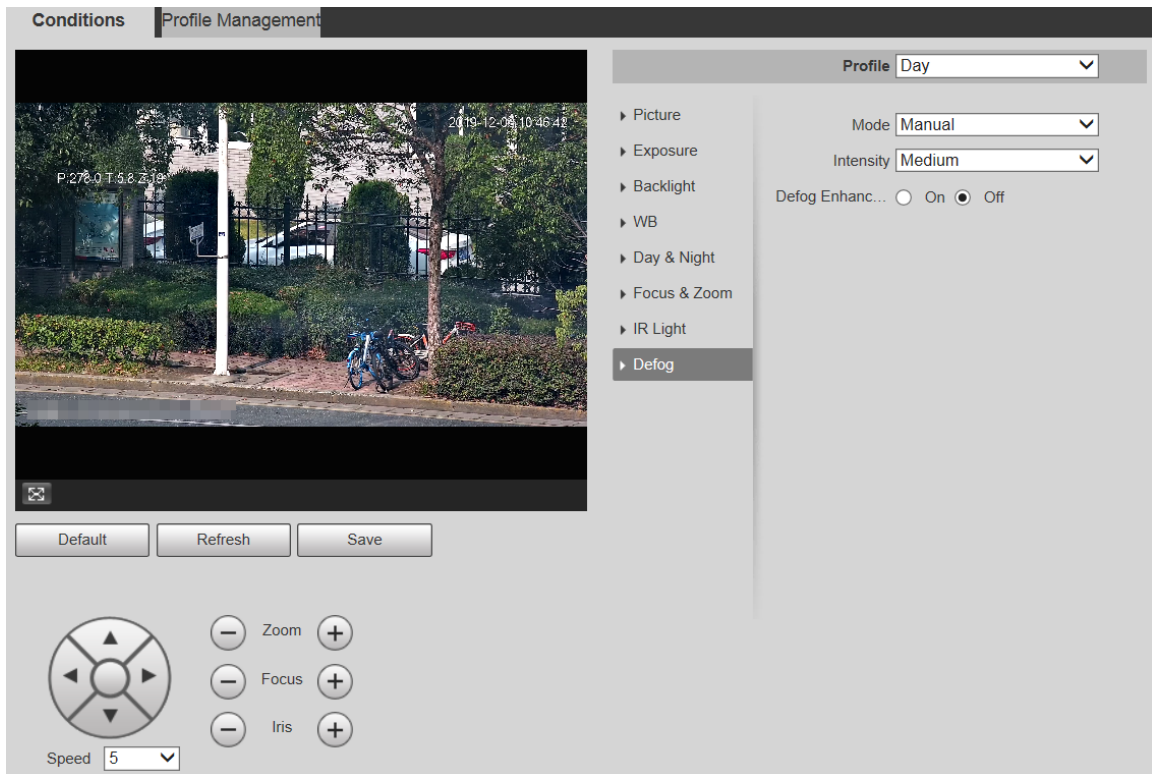




Figure 5-17 Defog settings—auto

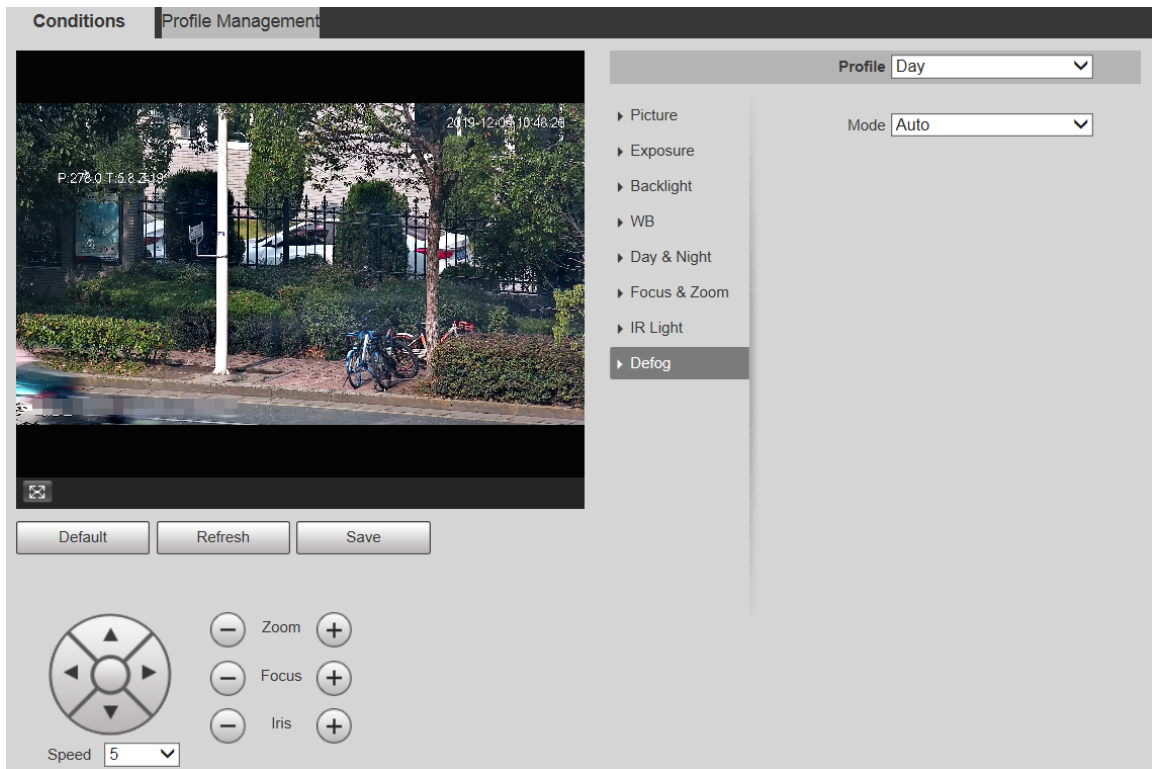

Step 2 Configure parameters as needed.

Table 5-7 Defog parameter description

| Parameter | Description |
|-------------------|---|
| Mode | Select the defog mode of the Device. You can select Auto , Manual , or Off . It is Off by default.  For the Device that supports optical defog, in Auto mode, optical defog and electronic defog switch automatically according to the algorithm. And in Off mode, electronic defog is enabled by default. |
| Intensity | Set the defog intensity of the Device. You can select from Low , Medium , or High . |
| Defog Enhancement | In Manual mode, if you enable this function, both optical defog and electronic defog are enabled. (You need to enable Auto mode for Day & Night to use the function.)  Only the Device that supports optical defog has this parameter. |

Step 3 Click **Save**.

5.1.1.2 Profile Management

Step 1 Select **Setting > Camera > Conditions > Profile Management**.


The **Profile Management** interface is displayed.

Step 2 Select the profile management mode.

There are three options: **General**, **Full Time** and **Schedule**.


- If you select **General**, monitoring is based on the general configuration of the Device.

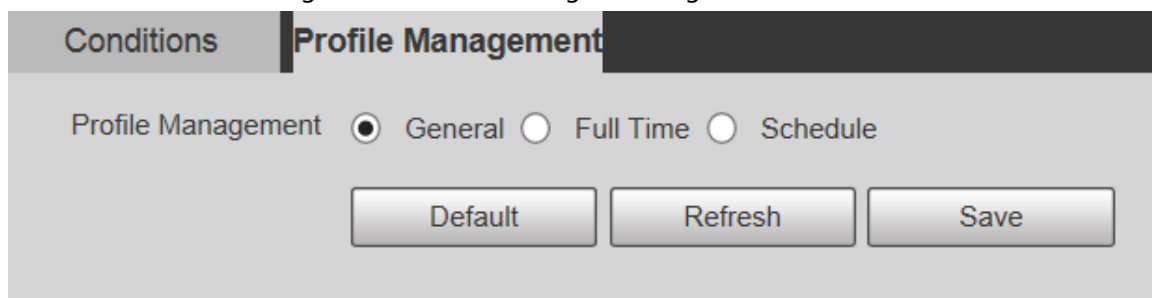Figure 5-18 Profile management—general




- If you select **Full Time**, **Day** and **Night** are selectable, and the corresponding camera property profile is day or night.

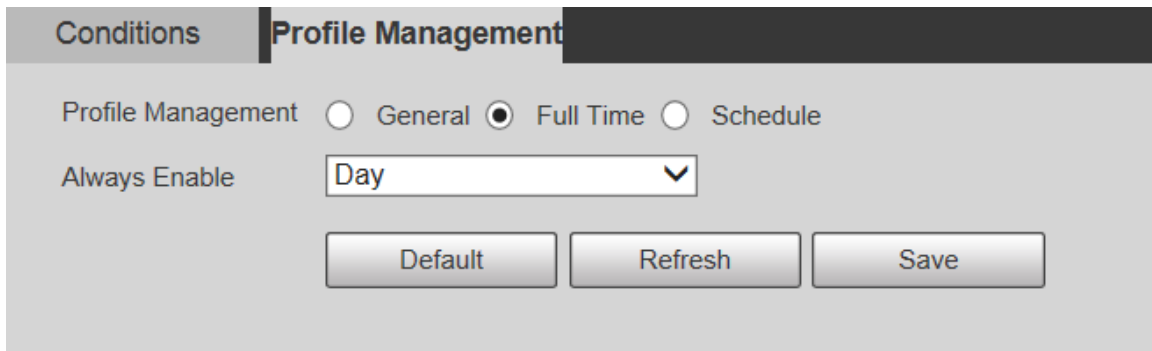Figure 5-19 Profile management—full time



- If you select **Schedule**, you can select one period for day configuration and another period for night configuration. For example, you can set the day-time configuration from 6:00 to 18:00, and set the night-time configuration from 18:00 to 6:00 on the next day.

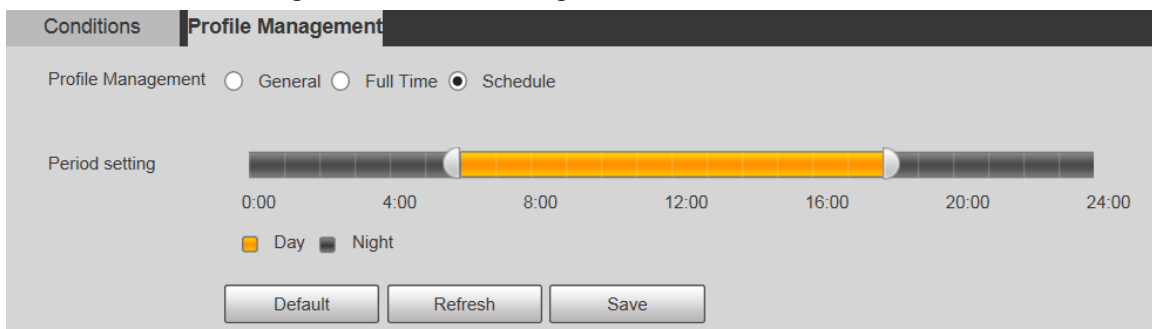Figure 5-20 Profile management—schedule



Step 3 Click **Save**.

5.1.2 Video

You can set the video stream, snapshot stream, video overlay, ROI, and storage path of the Device.

5.1.2.1 Video Stream

This section describes how to set the video stream for the monitoring screen.

Step 1 Select **Setting > Camera > Video > Video**.


Figure 5-21 Video stream settings




- The stream configuration interfaces might vary depending on devices, and the actual interface shall prevail.
- The default bit rate of different devices might vary, and the actual product shall prevail.

Step 2 Configure parameters as needed.

Table 5-8 Video stream parameter description

| Parameter | Description |
|--------------------|--|
| Enable | You can select the check box to enable sub stream. The sub stream is enabled by default. |
| Encode Mode | You can select H.264 , H.264H , H.264B , H.265 , MJPEG , MPEG4 , or SVAC . |
| Smart Codec | Enable Smart Codec to improve video compressibility and save storage space.  After Smart Codec is enabled, the Device does not support the third stream, ROI, smart event, and other functions. The actual interface shall prevail. |
| Resolution | Multiple resolution types are available for you to choose, and each type corresponds to a unique recommended stream value. |
| Frame Rate (FPS) | PAL: 1–25 frames/s or 1–50 frames/s. The frame rate changes with the resolution. |
| Bit Rate Type | There are two options: CBR (constant bit rate) and VBR (variable bit rate). <ul style="list-style-type: none"> • Picture quality can be set only in VBR mode, and cannot be set in CBR mode. • In MJPEG encode mode, CBR is the only option for Bit Rate Type. |
| Reference Bit Rate | The recommended bit rate range is based on the resolution and frame rate. |
| Bit Rate | It is the upper limit of stream in VBR. In CBR, the value is fixed. |
| I Frame Interval | The number of P frames between two I frames. The range varies with the frame rate, and the maximum value is 150. It is recommended to set the interval twice the frame rate. |
| SVC | Layered encoding can be done for FPS. SVC is a scalable encoding method on time domain. It is 1 by default, which means no layered coding. You can set 2, 3 or 4 layered encoding. |

| Parameter | Description |
|---------------------|--|
| Watermark Settings | You can verify the watermark to check if the video has been tampered. |
| Watermark Character | <p>You can verify the watermark to check if the video has been tampered. Select Watermark Settings check box to enable Watermark Character. The watermark character is DigitalCCTV by default, and you can modify it.</p>  <p>Watermark character consists of up to 128 characters from letters, standard symbols, spaces, and special characters.</p> |

Step 3 Click **Save**.

5.1.2.2 Snapshot

This section describes how to set streams for snapshots.

Step 1 Select **Setting > Camera > Video > Snapshot**.

Figure 5-22 Snapshot stream settings

Step 2 Configure parameters as needed.

Table 5-9 Snapshot stream parameter description

| Parameter | Description |
|---------------|---|
| Snapshot Type | <p>You can select General or Event.</p> <ul style="list-style-type: none"> • General refers to capturing pictures within the time range set in the schedule. For details, see "5.6.1 Schedule". • Event means capturing pictures when motion detection, video tampering, or local alarms are triggered. For how to enable snapshots for motion detection, video tampering, or local alarms, see "5.5 Event Management". |
| Image Size | It is the same as the resolution of the selected snapshot main stream, and cannot be modified on this interface. |
| Quality | You can set the snapshot quality from 1 to 6 levels. Level 1 is the lowest level, and level 6 is the highest level. |
| Interval | Set the snapshot frequency. You can select from 1 s through 7 s or Customized . |

Step 3 Click **Save**.

5.1.2.3 Overlay

Configure overlay information, and it will be displayed on the **Live** interface.


5.1.2.3.1 Privacy Masking

You can enable this function when you need to protect privacy of some areas on the video image.

Procedure

Step 1 Select **Setting > Camera > Video > Overlay > Privacy Masking**.

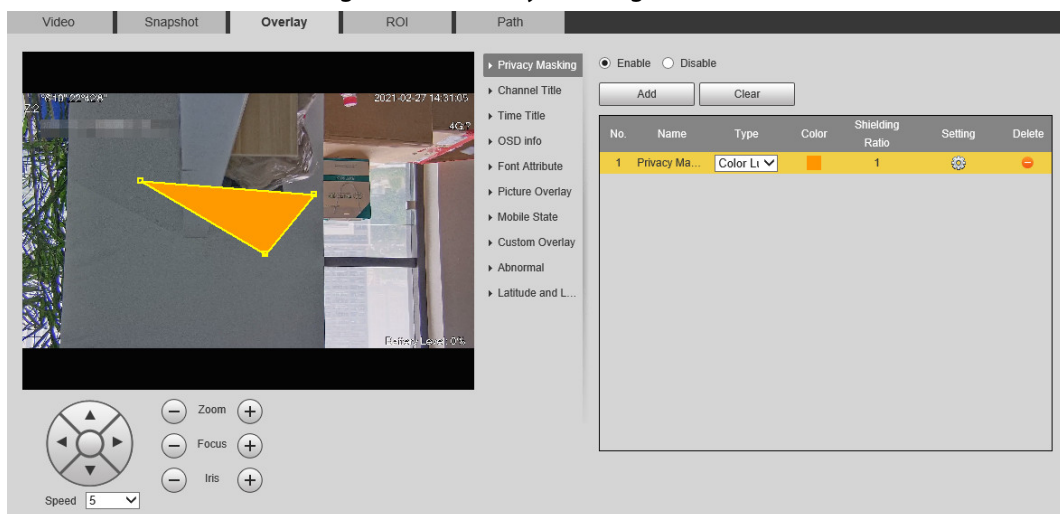Figure 5-23 Privacy masking



Step 2 Select **Enable**.


Step 3 Click **Add**, select the masking type and color, set the shielding ratio, and then draw blocks on the image.



You can select the masking type from **Color Lump** and **Mosaic**.

- When selecting **Color Lump** only, you can draw triangles and convex quadrilaterals as blocks. You can drag 8 blocks at most.
- When selecting **Mosaic**, you can draw rectangles as blocks with mosaic. You can draw 4 blocks at most.
- When selecting both **Color Lump** and **Mosaic**, you can draw 8 blocks at most.

Related Operations


- View and edit the block
 - Select the privacy masking rule to be edited in the list, then the rule is highlighted, and the block frame is displayed in the image. You can edit the selected block as needed, including moving the position, and adjusting the size.
- Edit the block name
 - Double-click the block name to edit it.
- Delete the block
 - ◇ Click  to delete blocks one by one.
 - ◇ Click **Clear** to delete all blocks.

5.1.2.3.2 Channel Title

You can enable this function when you need to display channel title in the video image.

Step 1 Select **Setting > Camera > Video > Overlay > Channel Title**.

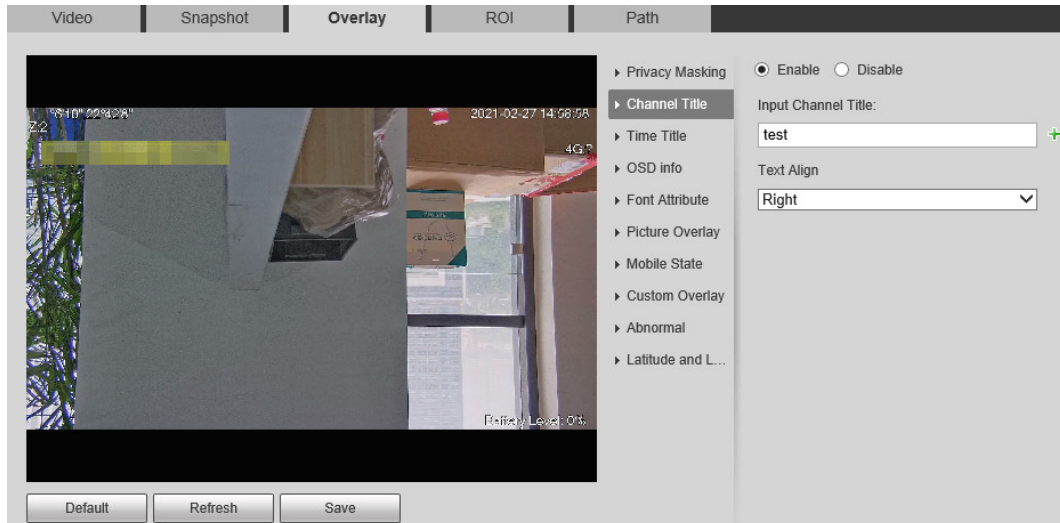Figure 5-24 Channel title



Step 2 Select the **Enable** check box, enter the channel title, and then select the text alignment.



Click **+** to expand the channel title, and you can expand 1 line at most.

Step 3 Move the title box to the position that you want in the image.


Step 4 Click **Save**.

5.1.2.3.3 Time Title

You can enable this function when you need to display time in the video image.

Step 1 Select **Setting > Camera > Video > Overlay > Time Title**.

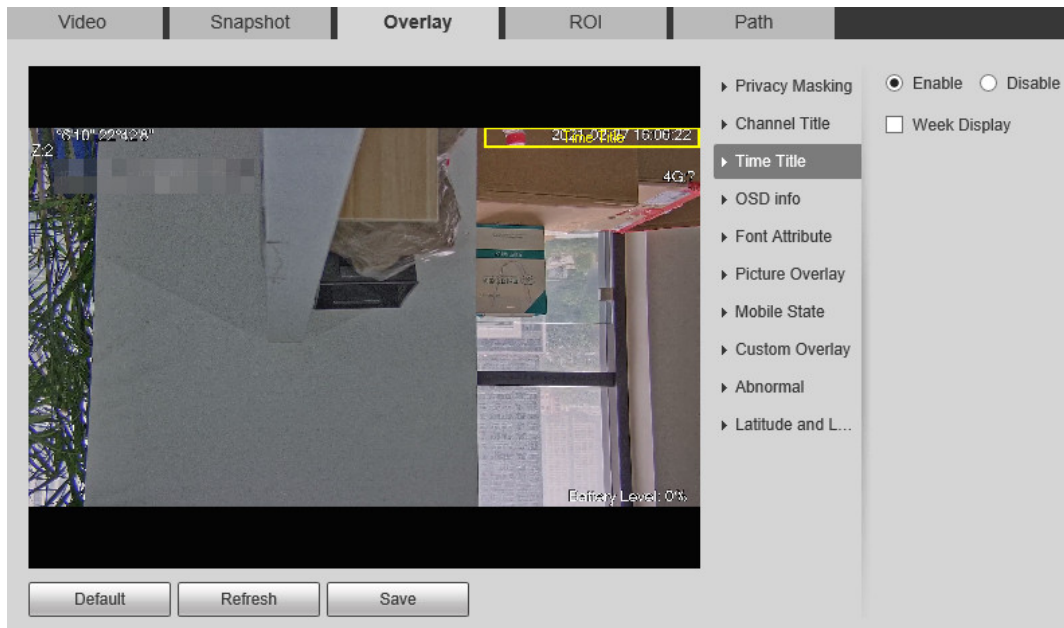Figure 5-25 Time title




- Step 2 Select the **Enable** check box.
- Step 3 Select the **Week Display** check box.
- Step 4 Move the time box to the position that you want in the image.
- Step 5 Click **Save**.

5.1.2.3.4 OSD Info

You can enable this function if you want to display preset title, temperature, PTZ life warning, coordinates, zoom, north direction, pattern, RS-485, battery information, and other information on the video image.



- Step 1 Select **Setting > Camera > Video > Overlay > OSD Info**.

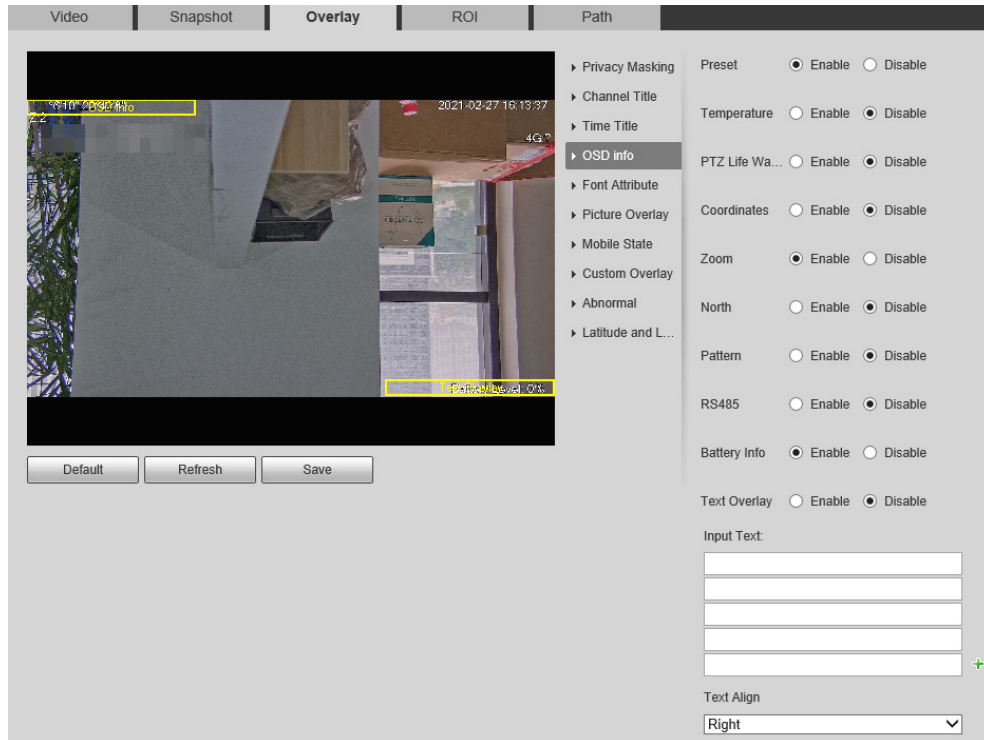Figure 5-26 OSD info



Step 2 Configure OSD information.

Table 5-10 Description of OSD information

| Parameter | Description |
|------------------|--|
| Preset | <p>Select Enable, and the preset name is displayed on the image when the camera turns to the preset, and it will disappear 3 s later.</p>  <p>For some devices, you can set the duration of the preset title displaying on the screen. You can select from Disable, 5s, 15s, Display Permanently, and Custom.</p> |
| Temperature | Select Enable , and the internal temperature of the current device is displayed. |
| PTZ Life Warning | When the PTZ lifespan is close to the threshold, a warning will be displayed on the video image. This OSD info is enabled by default. |
| Coordinates | Select Enable , and the PTZ coordinates information is displayed on the image. |
| Zoom | Select Enable , and the zoom information is displayed on the image. For example,  means 12x zoom rate. |
| North | Select Enable , and the north direction is displayed on the image. |
| Pattern | Select Enable , and the pattern information is displayed on the image. |
| RS485 | Select Enable , and the RS-485 communication information is displayed on the image. |
| Battery Info | Select Enable , and the battery level is displayed on the image. |
| Text Overlay | Select Enable and enter text, and the text is displayed on the image. |
| Input Text | |

| Parameter | Description |
|------------|---|
| Text Align | Set the alignment mode of the displayed information on the image. |

Step 3 Move the OSD box to the position that you want on the image.


Step 4 Click **Save**.

5.1.2.3.5 Font Attribute

You can enable this function if you need to adjust the font size and color on the video image.

Step 1 Select **Setting > Camera > Video > Overlay > Font Attribute**.

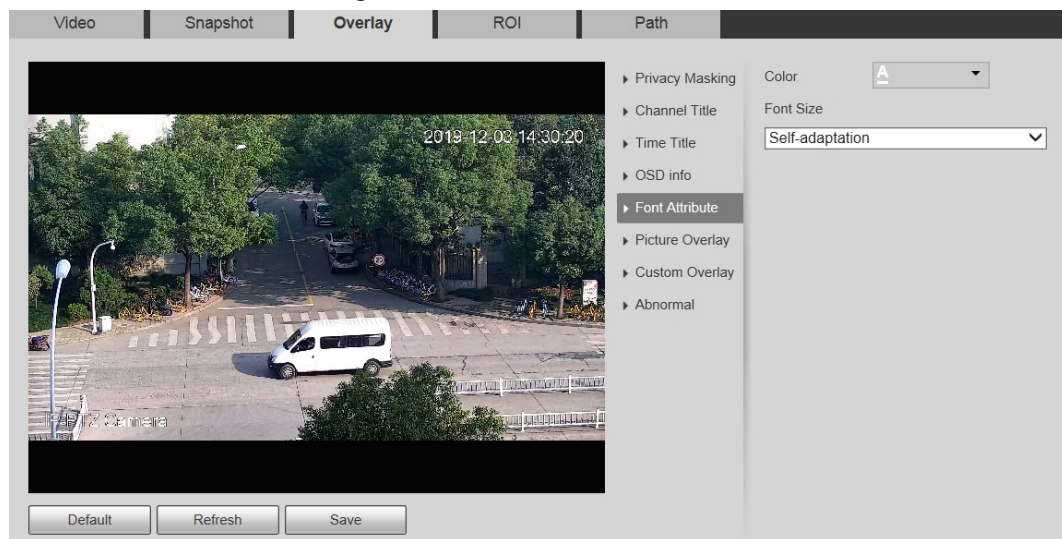Figure 5-27 Font attribute



Step 2 Select the font color and size.
Click **More Color** to customize the font color.

Step 3 Click **Save**.

5.1.2.3.6 Picture Overlay


You can enable this function if you need to display picture on the video image.



Text overlay and picture overlay cannot be enabled at the same time.

Step 1 Select **Setting > Camera > Video > Overlay > Picture Overlay**.

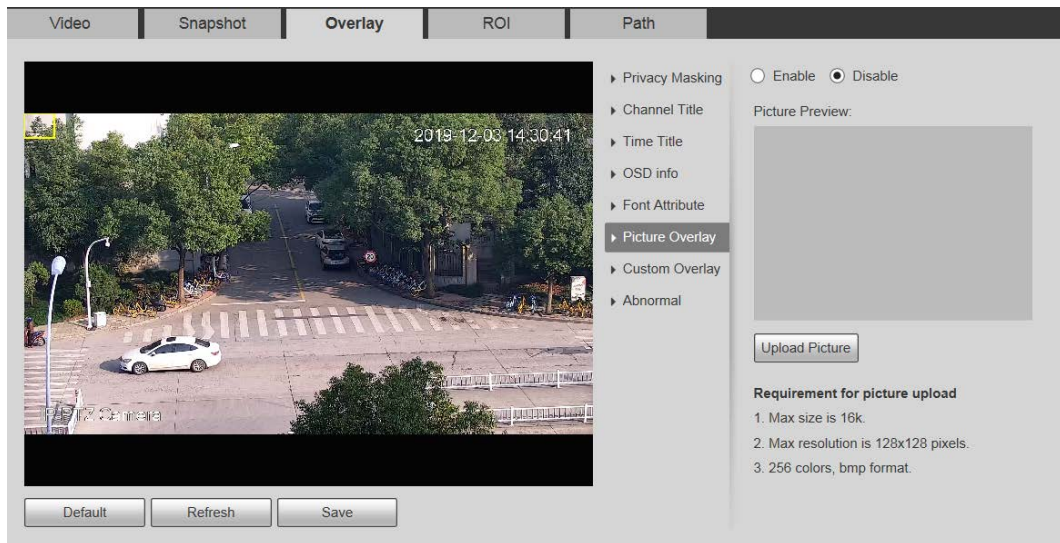Figure 5-28 Picture overlay




- Step 2** Select the **Enable** check box, click **Upload Picture**, and then select the picture to be overlaid.
The picture is displayed on the video image.
- Step 3** Move the overlaid picture to the position that you want on the image.
- Step 4** Click **Save**.

5.1.2.3.7 Mobile State

You can enable this function if you want to display mobile state on the image.

- Step 1** Select **Setting > Camera > Video > Overlay > Mobile State**.

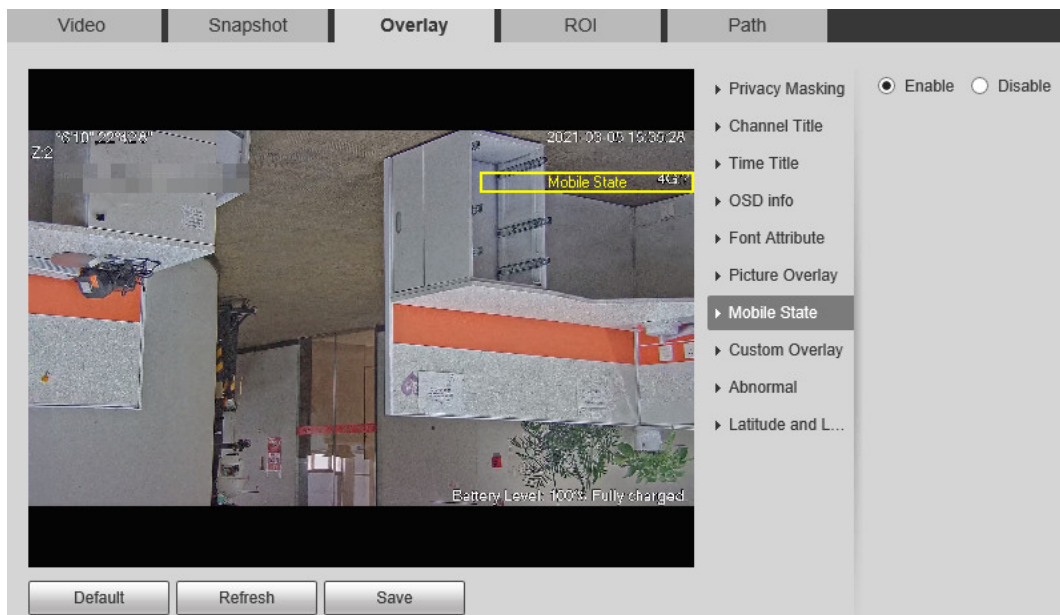Figure 5-29 Mobile state




- Step 2** Select the **Enable** checkbox.
- Step 3** Drag the mobile state box to the position that you want on the image.
- Step 4** Click **Save**.
The mobile state information is displayed on the image.

5.1.2.3.8 Custom Overlay

You can enable this function if you need to display custom information on the video image.

Step 1 Select **Setting > Camera > Video > Overlay > Custom Overlay**.

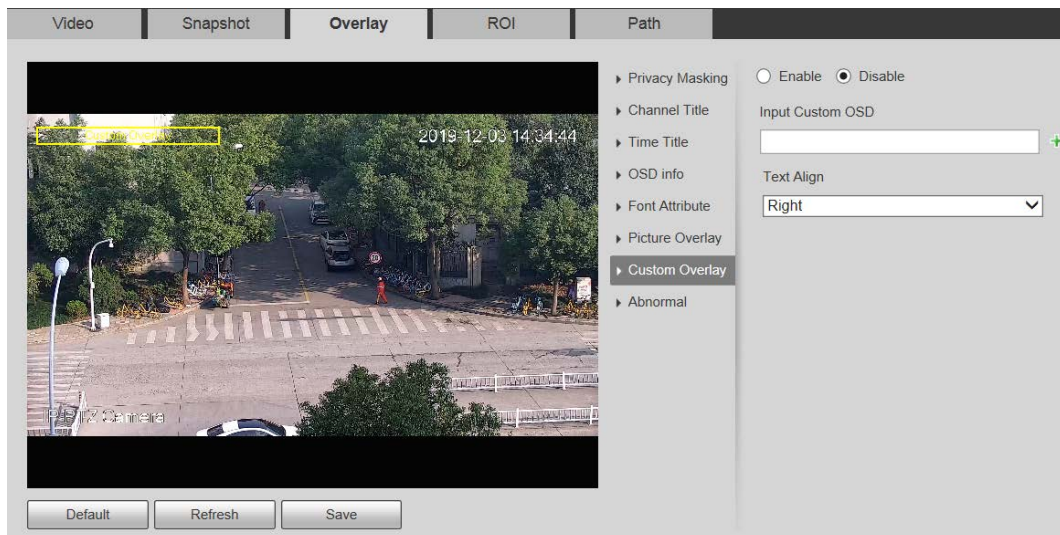Figure 5-30 Custom overlay



Step 2 Select the **Enable** check box, and then select the text alignment.



Click **+** to expand the custom overlay, and you can expand 1 line at most.

Step 3 Drag the custom overlay box to the position that you want on the image.


Step 4 Click **Save**.

5.1.2.3.9 Abnormal

You can enable this function if you want to display exception information on the image.

Step 1 Select **Setting > Camera > Video > Overlay > Abnormal**.

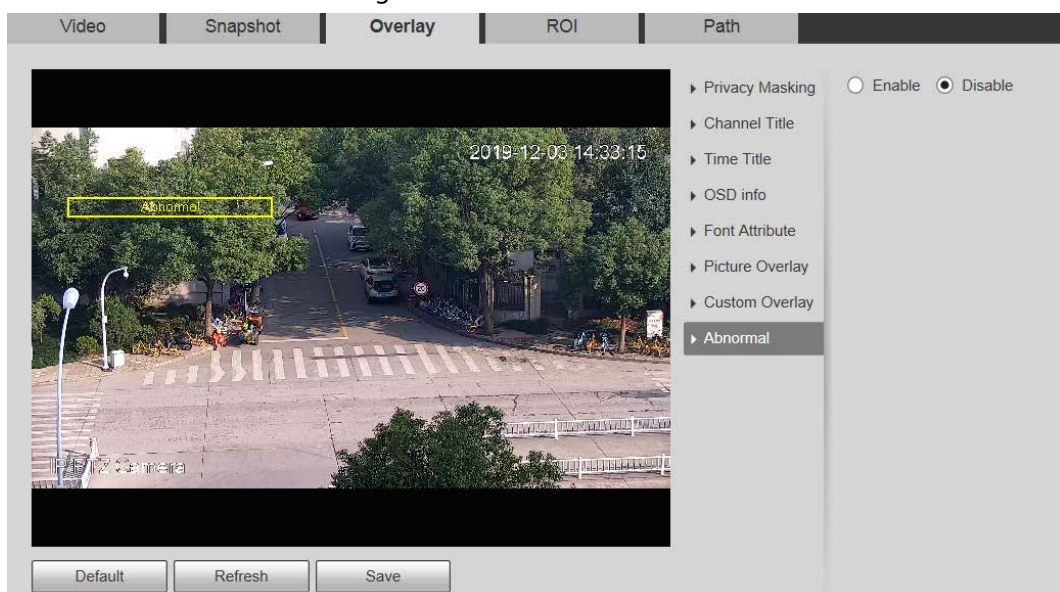Figure 5-31 Abnormal



Step 2 Select the **Enable** checkbox.


- Step 3** Drag the box to the position that you want on the image.
- Step 4** Click **Save**.
The exception information is displayed on the image.

5.1.2.3.10 Latitude and Longitude

You can enable this function if you need to display latitude and longitude on the video image.

- Step 1** Select **Setting > Camera > Video > Overlay > Latitude and Longitude**.

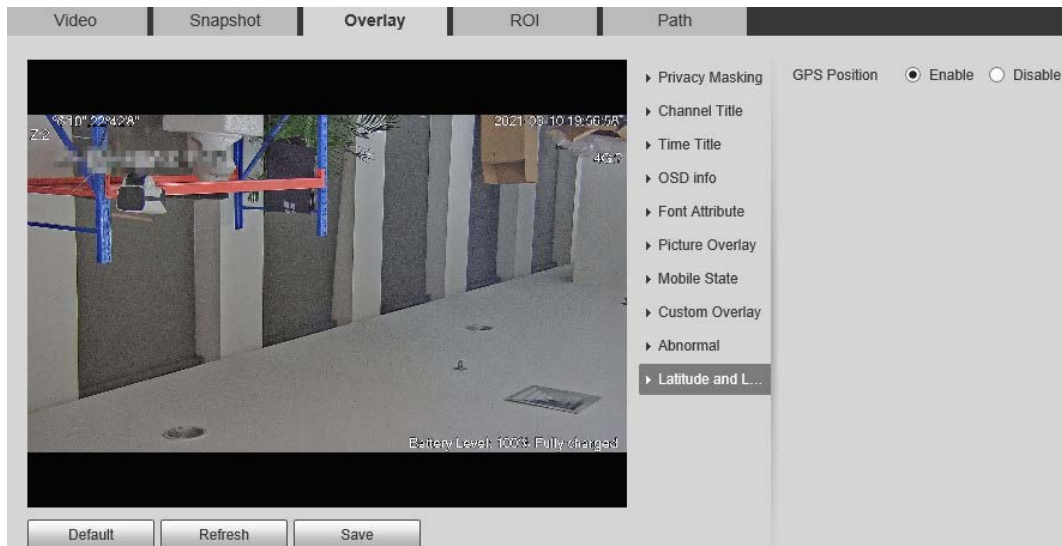Figure 5-32 Latitude and longitude



- Step 2** Select the **Enable** check box.
- Step 3** Drag the box to the position that you want on the image.
- Step 4** Click **Save**.

5.1.2.4 ROI


You can set a key monitoring region as a ROI (region of interest), and configure the image quality of this region.



ROI is available on select models.

- Step 1** Select **Setting > Camera > Video > ROI**.

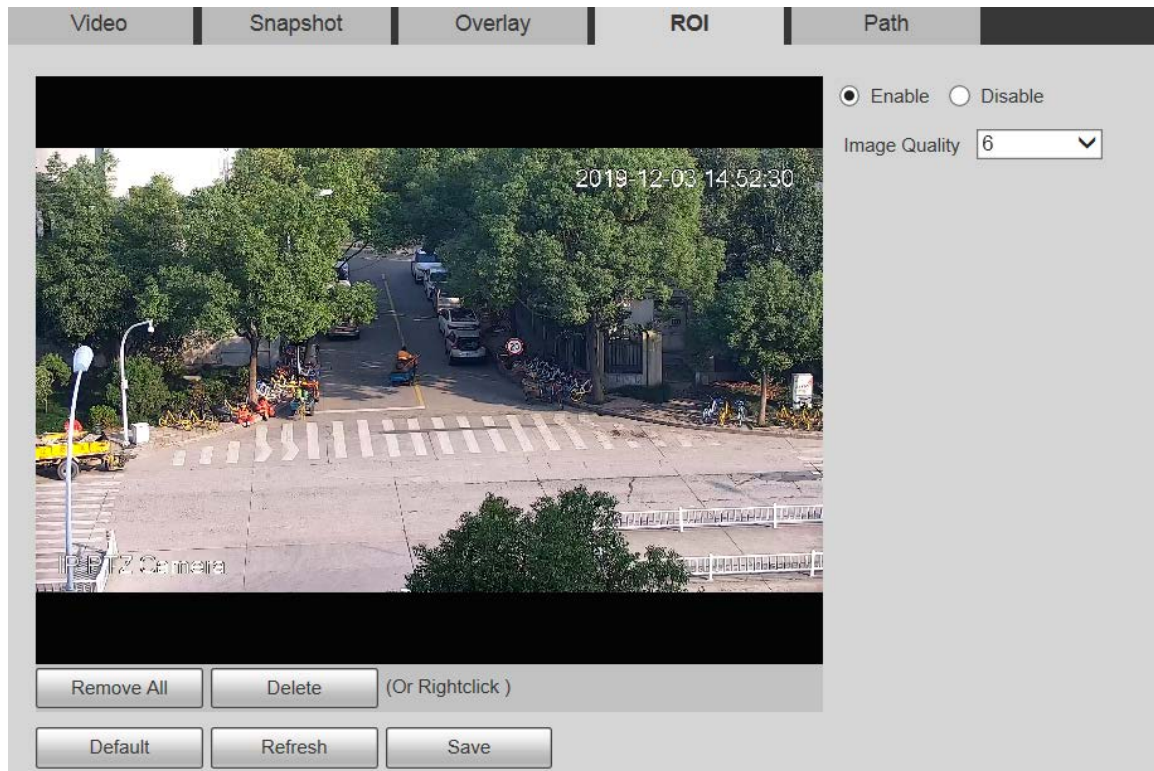Figure 5-33 ROI settings



Step 2 Select **Enable** to enable this function.

Step 3 Press and hold the left mouse button to draw boxes on the monitoring screen. You can draw up to 4 boxes.



- Click **Delete** or right click to delete the drawn boxes.
- Click **Remove All** to clear all boxes.

Step 4 Set the image quality of the ROI.

Step 5 Click **Save**.

5.1.2.5 Path

The storage path is associated with the snapshot and recording on the **Live** interface. You can set the path of **Live Snapshot** and **Live Record** respectively.

The storage path is associated with the snapshot, downloaded and clipped files on the **Playback** interface. You can set the path of **Playback Snapshot**, **Playback Download**, and **Video Clips** respectively.

Step 1 Select **Setting > Camera > Video > Path**.

Figure 5-34 Path settings

| Video | Snapshot | Overlay | ROI | Path |
|-------------------|--|---------|-----|-----------|
| Live Snapshot | C:\Users\...WebDownload\LiveSnapshot | | | Browse... |
| Live Record | C:\Users\...WebDownload\LiveRecord | | | Browse... |
| Playback Snapshot | C:\Users\...WebDownload\PlaybackSnapshot | | | Browse... |
| Playback Download | C:\Users\...WebDownload\PlaybackRecord | | | Browse... |
| Video Clips | C:\Users\...WebDownload\VideoClips | | | Browse... |
| Default | | Save | | |

Step 2 Set each storage path.

- Default storage path for snapshots: C:\Users\admin\WebDownload\LiveSnapshot.
- Default storage path for recording: C:\Users\admin\WebDownload\LiveRecord.
- Default storage path for playback snapshot:
C:\Users\admin\WebDownload\PlaybackSnapshot.
- Default storage path for playback download:
C:\Users\admin\WebDownload\PlaybackRecord.
- Default storage path for video clips: C:\Users\admin\WebDownload\VideoClips.

Step 3 Click **Save**.

5.1.3 Audio

You can configure audio parameters and alarm audio.



The function is available on select models.

5.1.3.1 Configuring Audio Parameters

You can set the audio input type, volume and more. After you enable main stream or sub stream, the network stream contains both audio and video; otherwise it is only video stream.



Before enabling sub stream audio, go to **Setting > Camera > Video > Video** to enable video in sub stream.

Step 1 Select **Setting > Camera > Audio > Audio**.

Figure 5-35 Audio



The screenshot shows the 'Audio' configuration window with the 'Alarm Audio' tab selected. It is divided into three sections: 'Encode', 'Attribute', and control buttons.



- Encode Section:**
 - Main Stream:**
 - Enable:
 - Encode Mode: G.711A
 - Sampling Frequency: 8000
 - Sub Stream:**
 - Enable:
 - Sub Stream 1: Sub Stream 1
 - Encode Mode: G.711A
 - Sampling Frequency: 8000
- Attribute Section:**
 - AudiIn Type: LineIn
 - Audio Output Type: LineOut
 - Noise Filter: Disable
 - Microphone Volume: Slider from - to + 0
 - Speaker Volume: Slider from - to + 0
- Buttons:** Default, Refresh, Save

Step 2 Enable audio in main stream or sub stream.

Step 3 Configure audio parameters.

Table 5-11 Description of audio parameters

| Parameter | Description |
|--------------------|---|
| Enable | Enable audio in main stream or sub stream.  Audio can be enabled only when video has been enabled. |
| Encode Mode | The audio encoding mode selected here applies to both audio streams and voice talks. We recommend you to keep the default value. |
| Sampling Frequency | The number of audio signals sampled per second. The higher the sampling frequency, the more samples obtained per unit time, and the more accurate the restored audio signals. |
| AudiIn Type | Set the audio input type. <ul style="list-style-type: none"> • LineIn: The Camera collects audio signals through an external audio device. • Mic: The Camera collects audio signals through the built-in microphone. • Bluetooth: The Camera collects audio signals through a Bluetooth device.  Bluetooth is available on select models. |

| Parameter | Description |
|----------------------------|--|
| Audio Output Type | Set the audio output type. <ul style="list-style-type: none"> • LineOut: The Camera outputs audio signals through an external audio device. • Speaker: The Camera outputs audio signals through the built-in speaker. • Bluetooth: The Camera outputs audio signals through a Bluetooth device.  Bluetooth is available on select models. |
| Noise Filter | After the function is enabled, noise in the environment will be filtered. |
| NR (Noise Reduction) Level | Adjust the noise reduction level.  This parameter takes effect when noise filter is enabled. |
| Microphone Volume | Adjust the microphone volume. |
| Speaker Volume | Adjust the speaker volume. |

Step 4 Click **Save**.

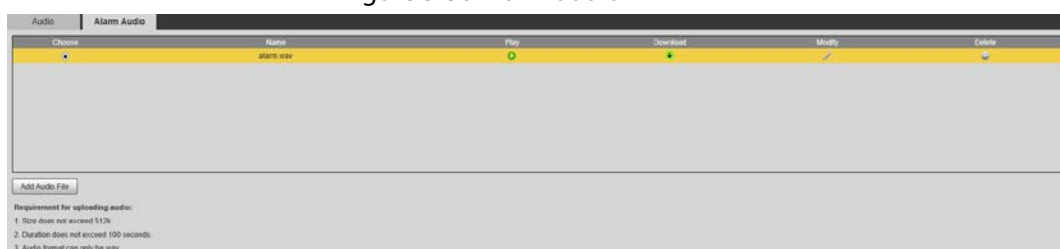
5.1.3.2 Configuring Alarm Audio

You can set the alarm audio to be played when an alarm is triggered. For some devices, you can record or upload alarm audios.

Procedure

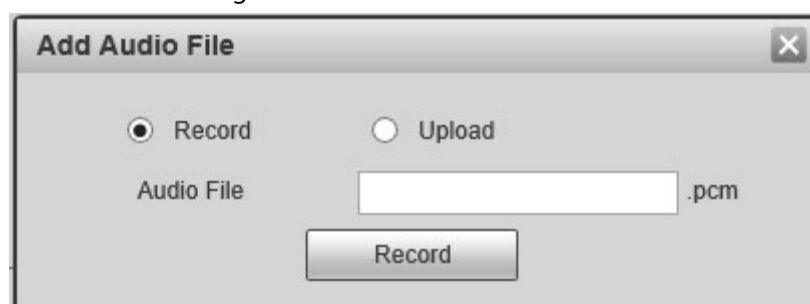
Step 1 Select **Setting > Camera > Audio > Alarm Audio**.

Figure 5-36 Alarm audio




Step 2 Click **Add Audio File**.



Figure 5-37 Add audio file



Step 3 Configure the audio file.



- Select **Record**, enter the audio file name, and then click **Record**.
Click **Stop** to complete recording.
- Select **Upload**, click , select the audio file to be uploaded, and then click **Upload**.



- The format of recorded audio is .pcm. Audio recording is only supported by some devices.
- Audio file in the format of .wav can be uploaded.
- You can edit and delete recorded or uploaded audio.
 - ◇ Click to  edit audio file.
 - ◇ Click  to delete audio file.

Step 4 Select the audio file that you need.

Related Operations

- Play audio: Click  to play the alarm audio.
- Download audio: Click  to download the alarm audio to local storage. The audio is saved to the default download path of the browser.

5.2 Network Settings

5.2.1 TCP/IP

You can configure the IP address and DNS server of the Device to connect it to other devices in the network.

Prerequisites

Before configuring network parameters, make sure that the Device is connected to the network properly.

- If there is no router in the network, assign an IP address in the same network segment.
- If there is a router in the network, set the corresponding gateway and subnet mask.

Procedure

Step 1 Select **Setting** > **Network** > **TCP/IP**.

Figure 5-38 TCP/IP settings

TCP/IP

Host Name

Ethernet Card

Mode Static DHCP

MAC Address

IP Version

IP Address

Subnet Mask

Default Gateway

Preferred DNS


Alternate DNS




MTU (600~1500)

Enable ARP/Ping to set IP address service

Step 2 Set TCP/IP parameters.

Table 5-12 TCP/IP parameter description

| Parameter | Description |
|---------------------|--|
| Host Name | Set the name of the current device. The host name can be English or Chinese within 63 bytes. |
| Ethernet Card | Select the Ethernet card to be configured. Wire is selected by default.  If the Device is configured with multiple Ethernet cards, the default Ethernet card can be changed. If you reset the default Ethernet card, restart the Device. |
| Set as Default Card | Click to set the current Ethernet card as the default card. |
| Mode | Static and DHCP modes are available. <ul style="list-style-type: none"> • If DHCP is selected, the IP address is obtained automatically. In this case, the IP address, subnet mask, and gateway cannot be set. • If Static is selected, you need to set the IP address, subnet mask, and gateway manually. |

| Parameter | Description |
|---|--|
| MAC Address | Display the MAC address of the Device. |
| IP Version | You can select IPv4 or IPv6 . Both versions are supported and can be accessed. |
| IP Address | Enter correct digits to change the IP address. |
| Subnet Mask | <p>Set the subnet mask according to actual conditions. The subnet prefix is a number in the range of 1 to 255. The subnet prefix identifies a specific network link, and usually contains a hierarchical structure.</p>  <p>The Device checks the validity of all IPv6 addresses. The IP address and the default gateway must be in the same network segment. Make sure that a certain part of the subnet prefix in the IP address and default gateway are the same.</p> |
| Default Gateway | <p>Configure as needed. The default gateway must be in the same network segment as the IP address.</p>  <p>For IPv6 version, in the IP Address, Default Gateway, Preferred DNS, and Alternate DNS fields, enter 128 bits, and these fields cannot be blank.</p> |
| Preferred DNS | IP address of the DNS server. |
| Alternate DNS | Alternate IP address of the DNS server. |
| MTU | <p>You can set the MTU value to ensure good data transmission according to the network. The value is 1500 by default. Modifying MTU value causes Ethernet card restarting and network disconnection.</p>  <p>Here are some suggested value for your reference.</p> <ul style="list-style-type: none"> • 1500: It is the maximum and default value of Ethernet packet, typical setting of the network connection without PPPOE or VPN, and is the default setting of some routers, network adapters, and switches. • 1492: The optimal value for PPPOE. • 1468: The optimal value for DHCP. • 1450: The optimal value for VPN. |
| Enable ARP/Ping to set IP address service | <p>Select the check box, and then you can modify and set the device IP address through ARP/Ping command if the MAC address is known.</p> <ul style="list-style-type: none"> • The function is enabled by default. During reboot, you will have no more than 2 minutes to configure the Device IP address by a ping packet with certain length. • The server will be turned off in 2 minutes, or it will be turned off immediately after the IP address is successfully configured. If the function is not enabled, the IP address cannot be configured with ping packet. |

Step 3 Click **Save**.

5.2.1.1 An Example of Configuring IP Address with ARP/Ping

- Step 1 To obtain a usable IP address, make sure that the Device and your PC are in the same LAN.
- Step 2 Get the MAC address from the Device label.
- Step 3 Open command editor on the PC and enter the following command.

Table 5-13 Command list

| System | Command |
|-----------------------|--|
| Windows syntax | <pre>arp -s <IP Address> <MAC> ping -l 480 -t < IP Address > Example: arp -s 192.168.1.125 11-40-8c-18-10-11 ping -l 480 -t 192.168.0.125</pre> |
| UNIX/Linux/Mac syntax | <pre>arp -s <IP Address> <MAC> ping -s 480 < IP Address > Example: arp -s 192.168.1.125 11-40-8c-18-10-11 ping -s 480 192.168.0.125</pre> |
| Win7 syntax | <pre>netsh i i show in netsh -c "i i" add neighbors ldx <IP Address> <MAC> ping -l 480 -t < IP Address > Example: netsh i i show in netsh -c "i i" add neighbors 12 192.168.1.125 11-40-8c-18-10-11 ping -l 480 -t 192.168.1.125</pre> |

- Step 4 Power off the Device and then restart it, or restart the Device over the network.
- Step 5 Check the PC command line. If there is information such as "Reply from 192.168.1.125...", it means the configuration succeeds. In this case, you can close the command editor.
- Step 6 Enter `http://<IP address>` in the browser address bar to log in.

5.2.2 Port

You can configure the maximum port numbers and values on this interface.

- Step 1 Select **Setting > Network > Port**.

Figure 5-39 Port interface

Port

| | | |
|----------------|---|--------------|
| Max Connection | <input type="text" value="10"/> | (1~20) |
| TCP Port | <input type="text" value="37777"/> | (1025~65534) |
| UDP Port | <input type="text" value="37778"/> | (1025~65534) |
| HTTP Port | <input type="text" value="80"/> | |
| RTSP Port | <input type="text" value="554"/> | |
| HTTPS Port | <input type="text" value="443"/> | |
| 5000 Port | <input checked="" type="radio"/> Enable <input type="radio"/> Off | |



Step 2 Configure each port value of the Device.



- Except **Max Connection**, modifications of other parameters will take effect after restart.
- 0–1024, 1900, 3800, 5000, 5050, 9999, 37776, 37780–37880, 39999, and 42323 are occupied for specific uses.
- It is not recommended to use the default values of other ports during port configuration.

Table 5-14 Port parameter description

| Parameter | Description |
|----------------|--|
| Max Connection | The maximum number of users that can log in to the web interface of the Device simultaneously. The value ranges from 1 to 10, and it is 10 by default. |
| TCP Port | TCP service port. The value is 37777 by default. You can set this parameter as needed. |
| UDP Port | User Datagram Protocol port. The value is 37778 by default. You can set this parameter as needed. |
| HTTP Port | HTTP communication port. The value is 80 by default. You can set this parameter as needed. |

| Parameter | Description |
|------------|---|
| RTSP Port | <p>Real Time Streaming Protocol port. Keep the default value 554 if it is displayed. If you play live view through Apple's QuickTime or VLC, the following format is available. This function is also supported by Blackberry mobile phone.</p> <p>When the URL format requiring RTSP, you need to specify channel number and bit stream type in the URL, and also username and password if needed.</p> <p>When playing live view with Blackberry mobile phone, you need to disable the audio, and then set the stream encoding mode to H.264B and resolution to CIF.</p> <p>URL format example: rtsp://username:password@ip:port/cam/realmonitor?channel=1&subtype=0</p> <ul style="list-style-type: none"> • Username: Your username. For example, admin. • Password: Your password. For example, admin. • IP: Your device IP. For example, 192.168.1.122. • Port: Leave it if the value is 554 by default. • Channel: Channel number starting from 1. For example, if it is channel 2, then enter channel=2. • Subtype: stream type. The main stream is 0 (subtype=0); the sub stream is 1 (subtype=1). <p>For example, if you require the sub stream of channel 2 from a certain device, then the URL shall be: rtsp://admin:admin@192.168.1.123:554/cam/realmonitor?channel=2&subtype=1</p> <p>If certification is not required, you do not need to specify the username and password. Use the following format: rtsp://ip:port/cam/realmonitor?channel=1&subtype=0</p> |
| RTMP | <p>A network protocol for real-time data communication. The value is 1935 by default. You can enter the value as needed.</p> <p> Enable RTMP to push audio and video data to the third-party server. Make sure that the address is trusted; otherwise it might cause data leakage.</p> |
| HTTPS Port | <p>HTTPS communication port. The value is 443 by default. You can set this parameter as needed.</p> |
| 5000 Port | <p>The port is disabled by default. If you need to connect the Camera to intelligent transportation box through 5000 port, enable this port.</p> <p> There might be network risk if the port is enabled. Be cautious.</p> |

Step 3 Click **Save**.

5.2.3 PPPoE

You can enable PPPoE (Point-to-Point Protocol over Ethernet) to establish network connection. In this case, the Device obtains a dynamic IP address. To use this function, you need to obtain the

PPPoE username and password from the Internet Service Provider (ISP).

Step 1 Select **Setting** > **Network** > **PPPoE**.

Figure 5-40 PPPoE interface (1)

The screenshot shows the PPPoE configuration page. At the top, the title 'PPPoE' is displayed. Below it, there is a checkbox for 'Enable' which is currently unchecked. Underneath, there are two input fields: 'Username' with the text 'none' and 'Password' which is empty. At the bottom of the form, there are three buttons: 'Default', 'Refresh', and 'Save'.

Step 2 Select **Enable**, and then enter PPPoE username and password.

Step 3 Click **Save**.

Save Succeeded! is displayed, and the obtained IP address of public network is displayed in real time. See Figure 5-41. You can access the Device through the IP address.

Figure 5-41 PPPoE interface (2)

The screenshot shows the PPPoE configuration page after being updated. The 'Enable' checkbox is now checked. The 'Username' field contains the text 'public' and the 'Password' field is filled with a series of black dots. The 'Default', 'Refresh', and 'Save' buttons remain at the bottom.

5.2.4 DDNS

Properly configure DDNS, and then the domain name on the DNS server matches your IP address and refresh the matching relation in real time. You can always access your device with the same domain name no matter how much your device IP address changes. Before making any changes, check whether your device supports the DNS server.



- The third party servers might collect your device information if DDNS is enabled.
- Register and log in to the DDNS website, and then you can view the information of all the connected cameras in your account.

Step 1 Select **Setting** > **Network** > **DDNS**.

Figure 5-42 DDNS

Step 2 Select **Type**, and then configure the parameters as needed.

Table 5-15 DDNS parameter description

| Parameter | Description |
|----------------|--|
| Type | The name and website of the DDNS service provider. Here is the matching relationship. |
| Server Address | <ul style="list-style-type: none"> • CN99 DDNS Server address: www.3322.org • NO-IP DDNS Server address: dynupdate.no-ip.com • Dyndns DDNS Server address: members.dyndns.org |
| Domain Name | The domain name you registered on the DDNS website. |
| Username | Enter the username and password obtained from DDNS service provider. You need to register an account (including username and password) on the website of DDNS service provider. |
| Password | |
| Interval | The update cycle of the connection between your device and the server, and the time is 10 minutes by default. |

Step 3 Click **Save**.

Open the browser, enter the domain name in the address bar, and then press the Enter key. The login interface is displayed.

5.2.5 SMTP (Email)



After this function is enabled, the device data will be sent to the given server. There is data leakage risk. Think twice before enabling the function.

After you configure **SMTP (Email)**, when alarms, video detection and abnormal events are triggered, an email will be sent to the recipient server through SMTP server. The recipient can log in to the incoming mail server to receive emails.

Step 1 Select **Setting > Network > SMTP (Email)**.

Figure 5-43 SMTP (Email)

SMTP(Email)

SMTP Server

Port

Anonymity

Username

Password

Sender

Authentication ▼

Title Attachment

Mail Receiver +
-

Health Mail Update Period s(1~3600)

Step 2 Configure parameters as needed.

Table 5-16 SMTP (Email) parameter description

| Parameter | Description |
|-------------|---|
| SMTP Server | IP address of the outgoing mail server complying with SMTP protocol. |
| Port | Port number of the outgoing mail server complying with SMTP protocol. It is 25 by default. |
| Username | Username of sender mailbox. |
| Password | Password of sender mailbox. |
| Anonymity | For servers supporting anonymous email, you can log in anonymously without entering username, password, and sender information. |
| Sender | Email address of the sender. |


For the detailed configuration, see Table 5-17.

| Parameter | Description |
|----------------|---|
| Authentication | Select authentication type from None , SSL and TLS . TLS is selected by default. <ul style="list-style-type: none"> For the detailed configuration, see Table 5-17. There might be risks if you select the authentication type other than TLS. TLS is recommended. |
| Title | You can enter no more than 63 characters in Chinese, English, and Arabic numerals. |
| Mail Receiver | Email address of the receiver. Support 3 addresses at most. |
| Attachment | Select the check box to support attachment in the email. |
| Health Mail | The system sends test mail to check if the connection is successfully configured. Select the Health Mail check box and configure the Update Period , and then the system sends test mails according to the defined period. |
| Test | Test whether the email function is normal. If the configuration is correct, the email address of the receiver will receive the test email. Save the email configuration before running rest. |

For common email configurations, see Table 5-17.

Table 5-17 Common email configuration description

| Type | SMTP Server | Authentication | Port | Description |
|------|--------------|----------------|---------|--|
| QQ | smtp.qq.com | SSL | 465 | <ul style="list-style-type: none"> The authentication type cannot be None. You need to enable SMTP service in your mailbox. The authentication code is required; either the QQ password or email password is not applicable. Authentication code is the code you receive when enabling SMTP service. |
| | | TLS | 587 | |
| 163 | smtp.163.com | SSL | 465/994 | <ul style="list-style-type: none"> You need to enable SMTP service in your |
| | | TLS | 25 | |

| Type | SMTP Server | Authentication | Port | Description |
|------|---------------|----------------|------|---|
| | | — | | mailbox. <ul style="list-style-type: none"> The authentication code is required; the email password is not applicable.  Authentication code is the code you receive when enabling SMTP service. |
| Sina | smtp.sina.com | SSL | 465 | You need to enable SMTP service in your mailbox. |
| | | — | 25 | |
| 126 | smtp.126.com | — | 25 | You need to enable SMTP service in your mailbox. |

Step 3 Click **Save**.

5.2.6 UPnP



After UPnP is enabled, Intranet service and port of the Device will be mapped to Extranet. Think twice before enabling it.

UPnP (Universal Plug and Play) allows you to establish the mapping relationship between Intranet and Extranet. Extranet users can access Intranet device by visiting Extranet IP address. Intranet port is device port and Extranet port is router port. Users can access the Device by accessing Extranet port. When you are not using routers for UPnP, disable UPnP to avoid affecting other functions.

Once UPnP is enabled, the Device supports UPnP protocol. In Windows XP or Windows Vista, after UPnP is enabled, the Device can be automatically searched by Windows network.


Adding UPnP Network Service in Windows System

1. Open **Control Panel**, and then select **Add or Remove Programs**.
2. Click **Add/Remove Windows Components**.
3. Select **Network Service** from the **Windows Components Wizard** and click **Details** button.
4. Select **Internet Gateway Device Discovery and Control Client**, and **UPnP User Interface**, and then click **OK** to start installation.

Configuring UPnP

1. Select **Setting > Network > UPnP**.

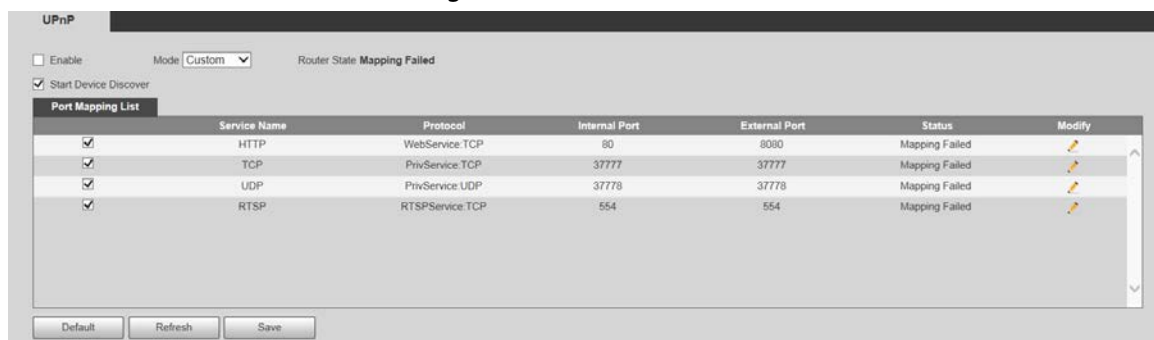Figure 5-44 UPnP



2. Select **Enable**.
3. Select a mode from the drop-down list.

There are 2 mapping modes: **Custom** and **Default**.

- In **Custom** mode, users can modify the external port.
- Select **Default**, and then the system finishes mapping with unoccupied port automatically. In this case, you do not need to modify mapping relation.

4. Select **Start Device Discover** as needed.
5. Click **Save**.

5.2.7 Bonjour

Introduction


Bonjour is also called zero-configuration networking, which can automatically discover computers, devices and services on IP networks. Bonjour is a protocol of industry standard which allows devices to search and find each other. IP address or DNS server is not required during the process.

Enable this function, and the network camera will be automatically detected by the OS and client with Bonjour function. When the network camera is automatically detected by Bonjour, server name you have set will be displayed.

Configuring Bonjour

1. Select **Setting > Network > Bonjour**.

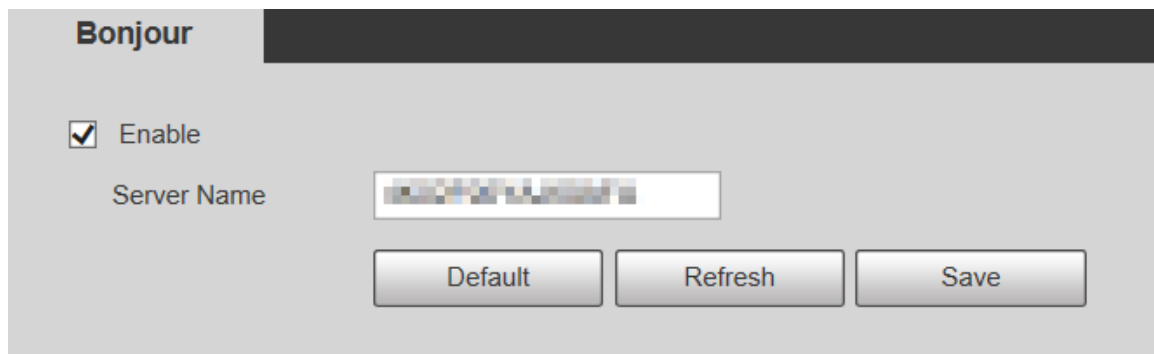Figure 5-45 Bonjour interface



2. Select **Enable**, and then set **Server Name**.
3. Click **Save**.

Visiting Web Interface with Safari Browser

In the OS and clients that support Bonjour, perform the following steps to visit the web interface of the Device with Safari browser.

1. Click **Show all bookmarks** in Safari.
2. The OS or client automatically detects the network cameras with Bonjour enabled in the LAN.
3. Click to visit the corresponding web interface.

5.2.8 SNMP

After setting SNMP (Simple Network Management Protocol) and connecting to the Device through certain software (such as MIB Builder and MG-SOFT MIB Browser), you can manage and monitor the Device with the software.

Prerequisites

- Install SNMP monitoring and management tool such as MIB Builder and MG-SOFT MIB Browser.
- Get the MIB file of the matched version from technical support.

Procedure

- Step 1 Select **Setting > Network > SNMP**.

Figure 5-46 SNMP (1)

The interface shows the following configuration options:

- Version: v1, v2, v3 (Recommen...)
- SNMP Port: (1~65535)
- Read Community:
- Write Community:
- Trap Address:
- Trap Port:
- Keep Alive

Buttons: Default, Refresh, Save

Figure 5-47 SNMP (2)

The interface shows the following configuration options:

- Version: v1, v2, v3 (Recommen...)
- SNMP Port: (1~65535)
- Read Community:
- Write Community:
- Trap Address:
- Trap Port:
- Keep Alive
- Read-only Username:
- Authentication Type: MD5, SHA
- Authentication Pass...:
- Encryption Type: CBC-DES
- Encryption Password:
- Read&write Userna...:
- Authentication Type: MD5, SHA
- Authentication Pass...:
- Encryption Type: CBC-DES
- Encryption Password:

Buttons: Default, Refresh, Save

Step 2 Select SNMP version to enable SNMP.

- Select **V1**, and the system can only process information of V1 version.
- Select **V2**, and the system can only process information of V2 version.
- Select **V3**, and then **V1** and **V2** become unavailable. You can configure username, password and authentication type. It requires corresponding username, password and




authentication type to access your device from the server.



Using **V1** and **V2** might cause data leakage, and **V3** is recommended.

In **Trap Address**, enter the IP address of the PC that has MIB Builder and MG-SOFT MIB Browser installed, and leave other parameters to the default.

Table 5-18 Description of SNMP parameters

| Parameter | Description |
|---------------------------------|---|
| SNMP Port | The listening port of the software agent on the Device. |
| Read Community, Write Community | The read and write community string that the software agent supports.  The name must consist of numbers, letters, underlines and strikethroughs. |
| Trap Address | The target address of the Trap information sent by the software agent on the Device. |
| Trap Port | The target port of the Trap information sent by the software agent on the Device. |
| Keep Alive | After you select the check box, the Device can send data packet to ensure continuous network connection. |
| Read-only Username | Set the read-only username used to access the Device, and it is public by default.  The name must consist of numbers, letters or underlines. |
| Read/Write Username | Set the read/write username used to access the Device, and it is public by default.  The name must consist of numbers, letters or underlines. |
| Authentication Type | You can select MD5 or SHA . The default type is MD5 . |
| Authentication Password | It cannot be less than 8 digits. |
| Encryption Type | It is CBC-DES by default. |
| Encryption Password | It cannot be less than 8 digits. |

Step 3 Click **Save**.

Result

View device configuration through MIB Builder or MG-SOFT MIB Browser.

1. Run MIB Builder and MG-SOFT MIB Browser.
2. Compile the two MIB files with MIB Builder.
3. Load the generated modules with MG-SOFT MIB Browser.
4. Enter the IP address of the Device you need to manage in the MG-SOFT MIB Browser, and then select version to search.
5. Unfold all the tree lists displayed in the MG-SOFT MIB Browser, and then you can view the configuration information, video channel amount, audio channel amount, and software version.



Use PC with Windows OS and disable SNMP Trap service. The MG-SOFT MIB Browser will display prompt when an alarm is triggered.

5.2.9 Multicast

You can access the Device by network to see live view. If the access times exceed its upper limit, preview might fail. You can set multicast IP to access by multicast protocol to solve the problem. The Device supports two multicast protocols: **RTP** and **TS**. RTP is enabled by default when main stream and sub stream are used. TS is disabled by default.

5.2.9.1 RTP

Step 1 Select **Setting > Network > Multicast > RTP**.

Figure 5-48 RTP interface

Step 2 Enable main stream or sub stream as needed.

Step 3 Enter multicast address and port number.

Step 4 Click **Save**.

5.2.9.2 TS

Step 1 Select **Setting > Network > Multicast > TS**.

Figure 5-49 TS interface

Step 2 Enable main stream or sub stream as needed.

Step 3 Enter multicast address and port number.

Step 4 Click **Save**.

5.2.10 Auto Register

After you enable this function, when the Device is connected to Internet, it will report the current location to the specified server which acts as the transit to make it easier for the client software to access the Device.

Step 1 Select **Setting > Network > Auto Register**.

Figure 5-50 Auto register

Step 2 Select the **Enable** check box to enable **Auto Register**.

Step 3 Enter **IP Address**, **Port** and **Sub-Device ID**.

Table 5-19 Auto register parameter description

| Parameter | Description |
|---------------|--|
| IP Address | The IP address of server that needs to be registered to. |
| Port | The port for auto-registration. |
| Sub-Device ID | Sub device ID assigned by server. |

Step 4 Click **Save**.

5.2.11 Wi-Fi

Devices with Wi-Fi function can access network through Wi-Fi.




- Wi-Fi and WPS are available on select models.
- All devices with WPS button support WPS function.

5.2.11.1 Wi-Fi Settings

The name, status and IP information of current hotspot are displayed in the Wi-Fi information bar. Click **Refresh** after reconnection to make sure that the operating status is displayed in real time. Connecting Wi-Fi hotspot takes some time depending on network signal strength.


Step 1 Select the **Enable** check box.

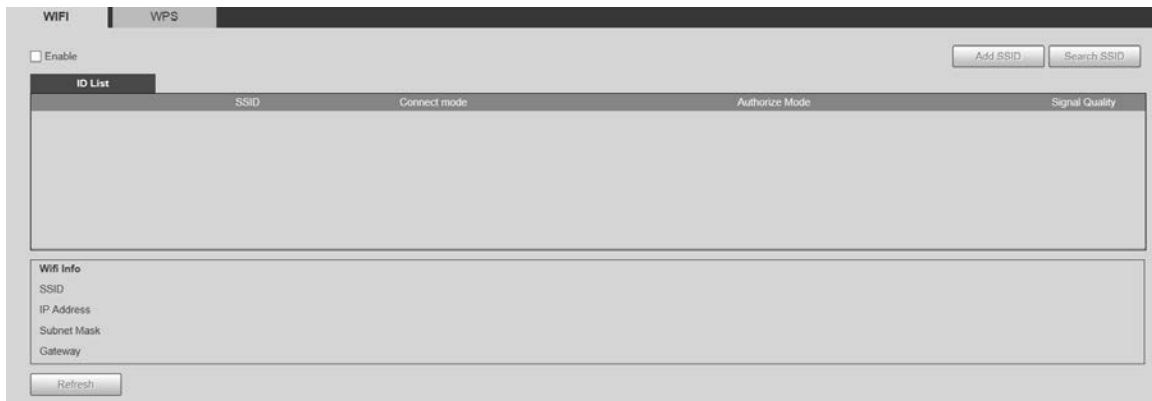Figure 5-51 Wi-Fi settings (1)




Step 2 Click **Search SSID**, and Wi-Fi hotspots in the environment of current network camera are displayed.

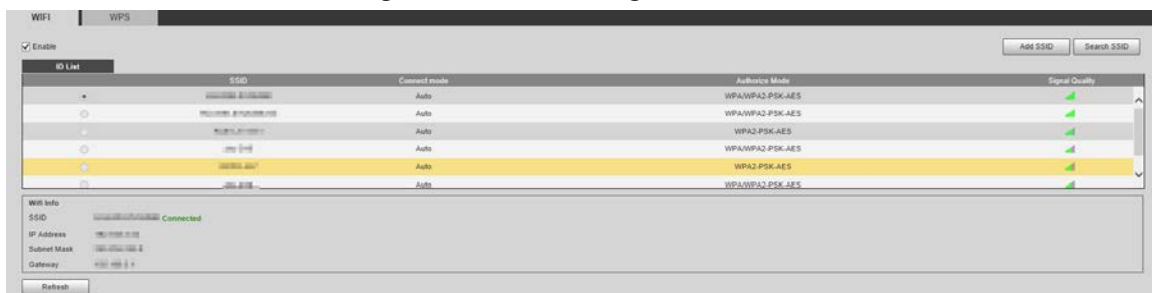Figure 5-52 Wi-Fi settings (2)



Step 3 To manually add Wi-Fi, click **Add SSID**, and the **Add WiFi** interface is displayed.

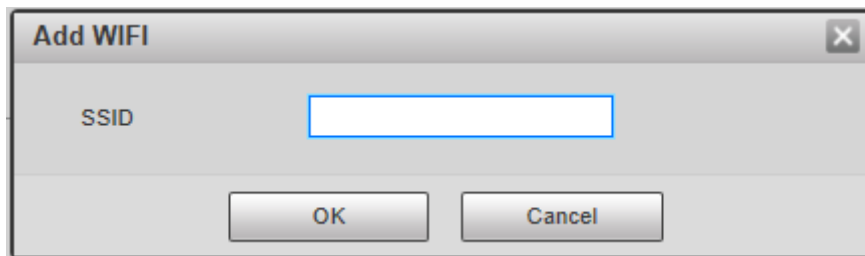Figure 5-53 Add Wi-Fi



Step 4 Enter a network name in the dialog box.



It is recommended to set a secure encryption method for the Device to connect routers.

Step 5 Double-click one hotspot to display the **Signal Quality** and the **Authentication Manner**.

- If the password is required, enter it. When entering the password, its index number shall be consistent with that on the router.
- Click **Connection** if password is not required.

5.2.11.2 WPS Settings

Figure 5-54 WPS settings

PIN and SSID can be obtained from the router. Enter PIN and SSID, and then click **Refresh** to display operating status in real time.

5.2.11.3 AP Settings

You can use the Camera as wireless AP (Access Point), and other devices such as mobile phones can connect to the Camera by searching for the network name. You can then log in to the Camera through the browser on your device. At most 5 accounts can log in to the Camera at the same time. AP and Wi-Fi cannot be both enabled at the same time, and AP is disabled by default.

Procedure

- Step 1 Select **Setting > Network > WIFI > AP**.
- Step 2 Select **Enable**, and then set AP information.

Figure 5-55 AP settings

Table 5-20 AP parameter description

| Parameter | Description |
|---------------------|--|
| SSID | The default name is "device serial number_SD". |
| Frequency Band | Both 2.4G and 5G are available. |
| Verification Type | It is WPA2 PSK by default, and cannot be changed. |
| Connection Password | Set the connection password which is required when other devices connect to the Camera. It is 12345678 by default. |

| Parameter | Description |
|-----------|--------------------------------|
| Host IP | Displays the IP address of AP. |

Step 3 Click **Save**.

Result

1. Open your device such as mobile phone, search for the network name of the AP in the wireless signal list, and then connect to the network.
After it is successfully connected, the IP address and MAC address of the device is displayed on the **AP** interface.
2. Open a browser on your device, enter the host IP on the **AP** interface or IP address on the **TCP/IP** interface, and then you can go to the login interface of the Camera.
3. Enter the username and password, and then log in to the Camera.



Live view is available on select devices.

5.2.12 802.1x

802.1x is a port-based network access control protocol. It allows users to manually select authentication mode to control device access to LAN, and meet authentication, billing, safety and management requirements of the network.

Step 1 Select **Setting > Network > 802.1x**.

Figure 5-56 802.1x interface

Step 2 Select the **Enable** check box to enable **802.1x**.

Step 3 Select an authentication mode, and enter username and password.

Table 5-21 802.1x setting parameter description

| Parameter | Description |
|----------------|--|
| Authentication | PEAP (protected EAP protocol). |
| Username | The username that was authenticated on the server. |
| Password | Corresponding password. |

Step 4 Click **Save**.

5.2.13 QoS

QoS (Quality of Service) is a network security mechanism, and is also a technology to solve network delay, congestion, and other problems.

For network business, QoS includes transmission bandwidth, time delay in transmission, and packet loss of data. In network, QoS can be improved by ensuring transmission bandwidth, and reducing time delay in transmission, packet loss rate, and delay jitter.

For DSCP (Differentiated Services Code Point), there are 64 priority degrees (0–63) of data packets. 0 represents the lowest priority, and 63 the highest priority. Based on the priority, the packets are classified into different groups. Each group occupies different bandwidth and has different discard percentage when there is congestion so as to improve service quality.

Step 1 Select **Setting > Network > QoS**.

Figure 5-57 QoS interface

Step 2 Configure parameters.

Table 5-22 QoS setting parameter description

| Parameter | Description |
|------------------|---|
| Realtime Monitor | Data packet of network video monitoring. The value ranges from 0 to 63. |
| Command | Data packet of device configuration and query. The value ranges from 0 to 63. |
| Open the WMM | Select the check box to enable wireless QoS. |

Step 3 Click **Save**.

5.2.14 4G/5G

After installing SIM card, you can connect the Device to 4G/5G network through dialing or mobile setting.

- Dialing setting: Connect the Device to 4G/5G network in specified period.
- Mobile setting: Receive alarm linkage messages on your mobile phone. When receiving alarm messages, you can activate the Device to connect to 4G/5G network through SMS or phone calls.



- The function is available on devices with 4G/5G module. This section takes 4G as an example.
- Dual 4G is supported by select models, but only one 4G network adapter can be enabled simultaneously.

5.2.14.1 Dialing Setting

Log in to web interface, select **Setting > Network > 4G > Dialing Setting**, and the **Dialing Setting** interface is displayed.

Figure 5-58 Dialing setting interface



Some devices only support certain mobile carriers, and only the supported carriers are displayed in **Network Support**.

- Step 1** Select the **Enable** check box.
- Step 2** Enter **APN**, **Authorize Mode**, **Dial-up Number**, **Username**, and **Password** according to the SIM card inserted.



These parameters might vary by countries. Contact local carrier or customer service for details.

- Step 3** Set the period to use 4G.



- If the current time is in the period you set, 4G network connection will be enabled. The IP address of the SIM card will be displayed in IP Address. And you can access the device through 4G after finishing the rest steps.
- If the current time is not in the period you set, 4G network connection will not be enabled. Only the corresponding **Wireless Signal** is displayed on the interface. And you cannot access the device through 4G.

Figure 5-59 Period setting

Step 4 Set the interval to enable 4G through message or phone call if you want to use 4G outside the period set in [Step3](#).



The value range is 0–7200 s and it is 30 s by default. If the interval is 30 s, after activating 4G, you can use it for 30 s. After 30 s, you need to activate 4G again. If you set the interval to 0 s, you can use 4G without disconnection and you do not need to activate it again. For the method to activate 4G through message or phone call, see "5.2.14.2 Mobile Setting".

Step 5 Click **Save**.

5.2.14.2 Mobile Setting


Log in to web interface, select **Setting > Network > 4G > Mobile Settings**, and the **Mobile Setting** interface is displayed.

You can add the phone number to receive alarms. You also can add phone number used to activate 4G through message or phone call if you want to use 4G outside the period set in [Step3](#) of "5.2.14.1 Dialing Setting".



Make sure that you add international calling codes before the phone number to avoid unnecessary charges caused by phone calls or messages to other countries or regions.

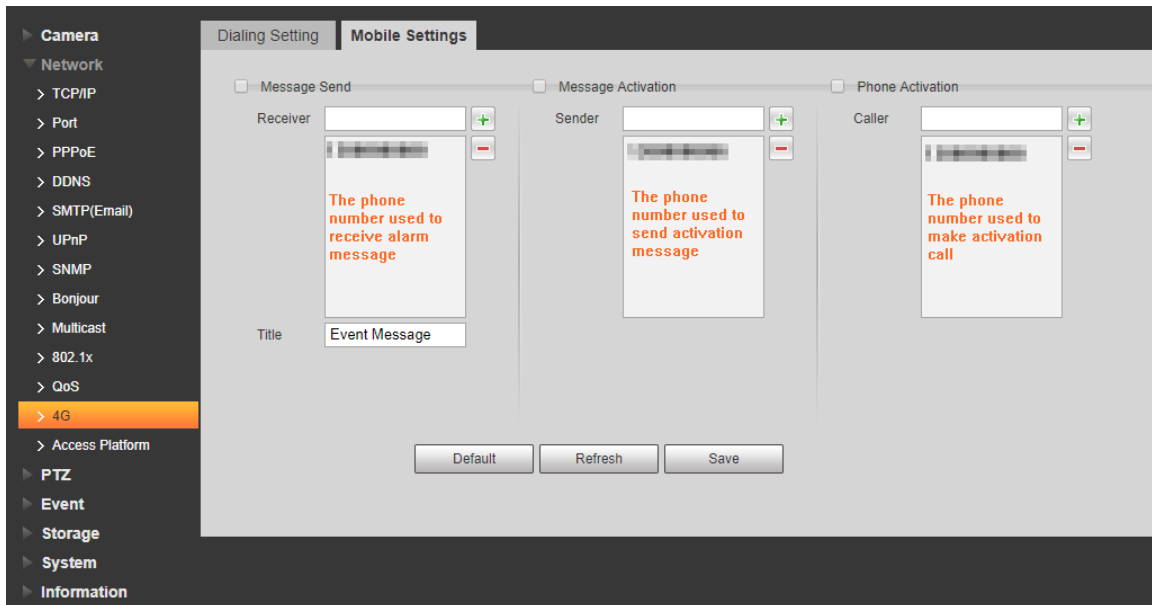Figure 5-60 Mobile setting interface




- **Message Send:** When alarms are triggered, the phone number added will receive message.
- **Message Activation:** You can enable 4G through message outside the period you set to use 4G. You need to send "ON" or "OFF" to phone number of the SIM card in the Device. "ON" indicates enabling, and "OFF" indicates disabling.
- **Phone Activation:** You can enable 4G through phone calls outside the period you set to use 4G. You need to call the phone number of the SIM card in the Device. If the call gets through, it means 4G has been enabled.



- Make sure that your SIM card supports making phone calls and sending messages, and it can be used normally.
- Make sure that you use activation function outside the time range you set; otherwise it does not work.

Step 1 Select the check box of the service you need to enable. You can select one or more services.


Step 2 Enter the phone number and click  to add it.

Step 3 Click **Save**.

Step 4 Select the **Message Link** check box on the interface of the event for which you want to receive message.

Take Face Detection for example. Click **Setting** > **Event** > **Face Detection** and select the **Message Link** check box.

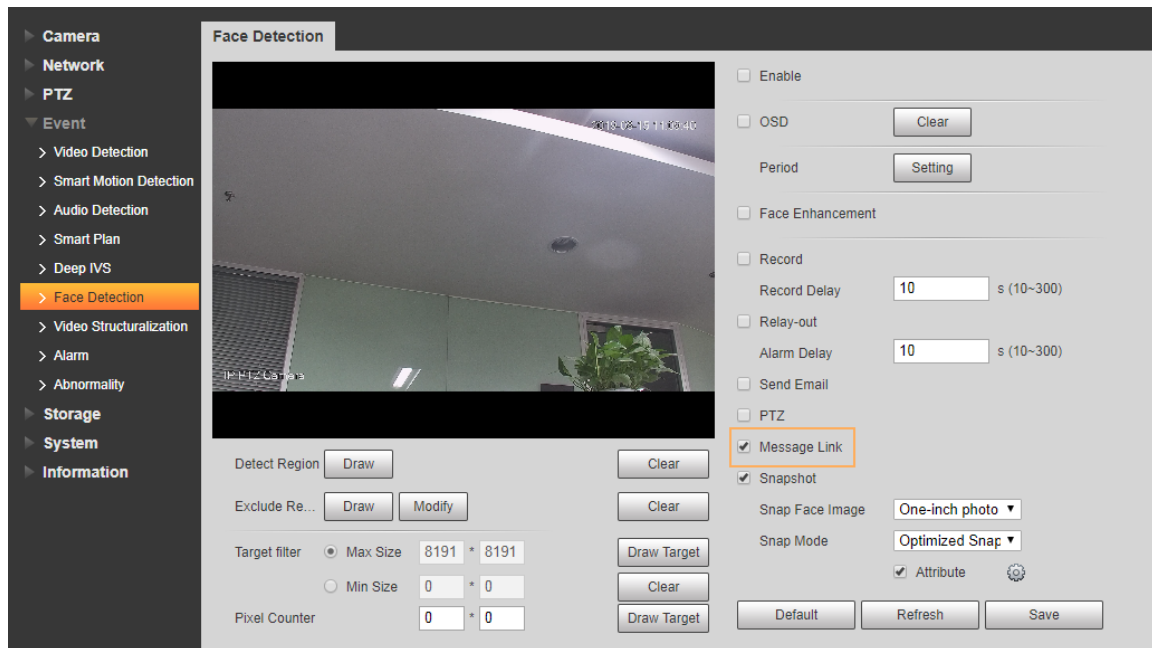Figure 5-61 Message link



Step 5 Click **Save** on the interface of the corresponding event. And you will receive message if the alarm is triggered.

5.2.15 Access Platform

5.2.15.1 P2P

P2P is a private network traversal technology which enables users to manage devices easily without requiring DDNS, port mapping or transit server. Scan the QR code with your smart phone, and then you can add and manage more devices on your mobile client.

Step 1 Select **Setting > Network > Access Platform > P2P**.

Figure 5-62 P2P interface



- P2P is enabled by default. You can manage the devices remotely.
- When P2P is enabled and the device is connected to network, the status is displayed as **Online**. We might collect the information including IP address, MAC address, device name, and serial number. The information collected is for remote access only. If you do not agree with this, you can clear the **Enable** check box.

Step 2 Log in to mobile phone client and tap **Device Management**.

Step 3 Tap **Add +** at the upper-right corner.

Step 4 Scan the QR code on the P2P interface.

Step 5 Follow the onscreen instructions to finish settings.

5.2.15.2 ONVIF

The ONVIF authentication is **On** by default, which allows the network video products (including video recording device and other recording devices) from other manufacturers to connect to the service.

Step 1 Select **Setting > Network > Access Platform > ONVIF**.

Figure 5-63 ONVIF interface



Step 2 Select **On** for **Authentication**.

Step 3 Click **Save**.

5.2.15.3 RTMP


You can connect the third party platforms (such as YouTube) to play live video through RTMP protocol.



- Only admin user can configure RTMP.
- RTMP only supports H.264, H.264B and H.264H video formats, and Advanced Audio Coding (AAC) audio format.

Step 1 Select **Setting > Network > Access Platform > RTMP**.

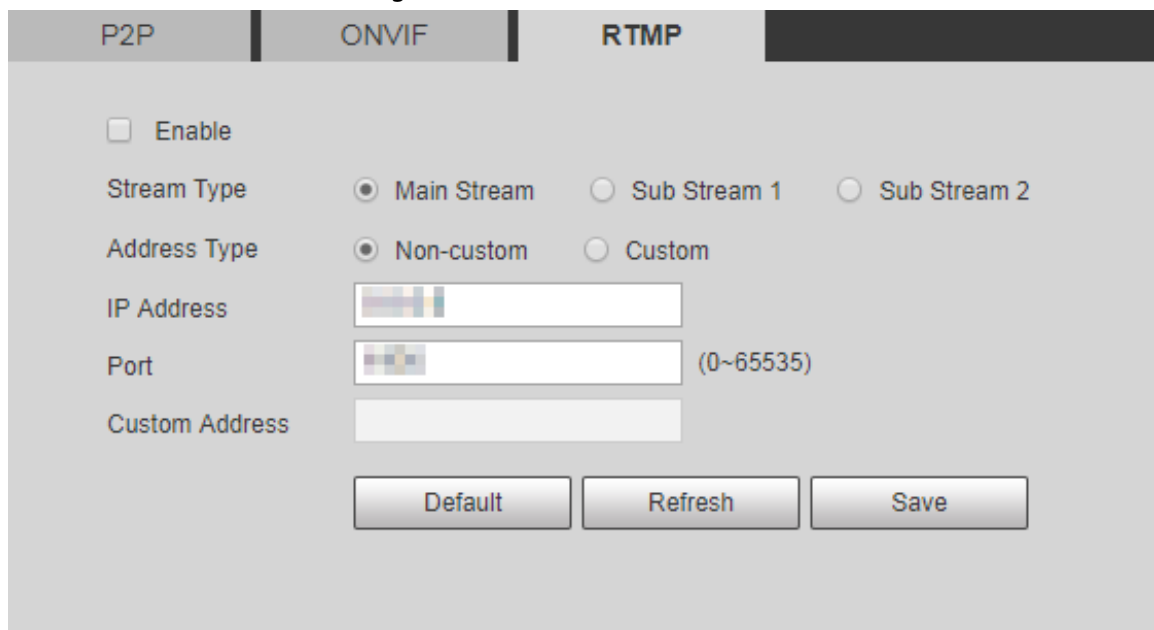Figure 5-64 RTMP interface



Step 2 Select the **Enable** check box, and RTMP will be enabled.



When enabling RTMP, make sure that the address can be trusted.

Step 3 Set parameters.

Table 5-23 RTMP parameter setting description

| Parameter | Description |
|----------------|---|
| Stream Type | Select live video stream type. Make sure that the video format of the stream is H.264, H.264B or H.264H, and the audio format is AAC. |
| Address Type | There are two options: Non-custom and Custom . <ul style="list-style-type: none"> • Non-custom: You need to fill in the IP address or domain name. • Custom: You need to fill in the address allocated by the server. |
| IP Address | If you have selected Non-custom , IP address and port need to be filled in. <ul style="list-style-type: none"> • IP Address: IPv4 or domain name is supported. • Port: It is recommended to use the default value. |
| Port | |
| Custom Address | If you have selected Custom , the address allocated by the server needs to be filled in. |

Step 4 Click **Save**.

5.3 Bluetooth Settings

You can connect the Camera to Bluetooth devices such as Bluetooth headset for voice broadcast of alarms and voice intercom with the platform.



The function is available on select models.


Procedure

Step 1 Select **Setting** > **Connection Settings** > **Bluetooth**.

Step 2 Select **Enable**.

The searched Bluetooth devices are displayed in the **Bluetooth List**. Click **Refresh** at the lower-right corner of the list to search for **Bluetooth** devices again.

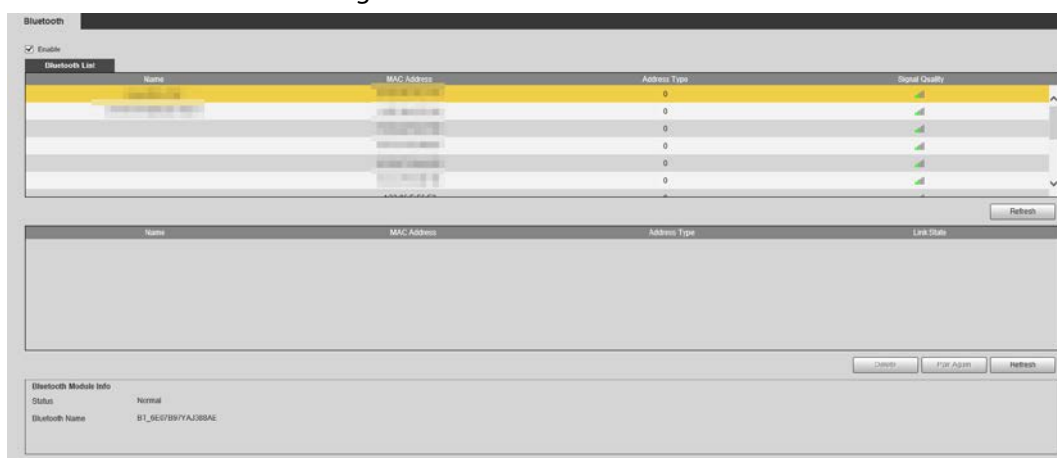Figure 5-65 Bluetooth list



Step 3 Double-click the name of Bluetooth device, and then set PIN on the **Setup** interface.



For the PIN of the Bluetooth device, see the corresponding user's manual.

Figure 5-66 Connect to Bluetooth device

Step 4 Click **Save**.

The connected Bluetooth device is displayed in the list below.

Step 5 Select **Setting > Camera > Audio > Audio**, and then set audio input and audio output types to **Bluetooth**.

Figure 5-67 Set audio

Related Operations

- Click **Refresh** at the lower-right corner of the list to get information of paired Bluetooth devices again.

- Click **Pair Again** to quickly connect to Bluetooth devices paired before.
- Click **Delete** to delete the Bluetooth device.

5.4 PTZ Settings

5.4.1 Protocol



Network PTZ setting and analog PTZ setting are available on select models.

5.4.1.1 Network PTZ Settings

Step 1 Select **Setting > PTZ > Protocol > Network PTZ**.

Figure 5-68 Network PTZ setting

Step 2 Select a protocol as needed.

You can select **DH-SD1**, **DH-SD3**, **PELCOD**, or **PELCOP**. **DH-SD1** is selected by default.



DH-SD1 protocol supports up to 80 presets, and DH-SD3 protocol supports up to 300 presets.

Step 3 Click **Save**.

5.4.1.2 Analog PTZ Settings

Step 1 Select **Setting > PTZ > Protocol > Analog PTZ**.


Figure 5-69 Analog PTZ setting

| Parameter | Value |
|-----------|-------|
| Address | 1 |
| Baud Rate | 9600 |
| Data Bit | 8 |
| Stop Bit | 1 |
| Parity | NONE |

Buttons: Default, Refresh, Save

Step 2 Configure parameters as needed.

Table 5-24 Analog PTZ parameter description

| Parameter | Description |
|-----------|--|
| Address | Enter the address of the Device.  Make sure that the address is the same as the device address; otherwise you cannot control the device. |
| Baud Rate | Select the baud rate of the Device. |
| Data Bit | It is 8 by default. |
| Stop Bit | It is 1 by default. |
| Parity | It is NONE by default. |

Step 3 Click **Save**.

5.4.2 Function


5.4.2.1 Preset

Select **Setting** > **PTZ** > **Function** > **Preset**. The **Preset** interface is displayed.



If you click **Remove All**, all presets and special presets will be cleared.

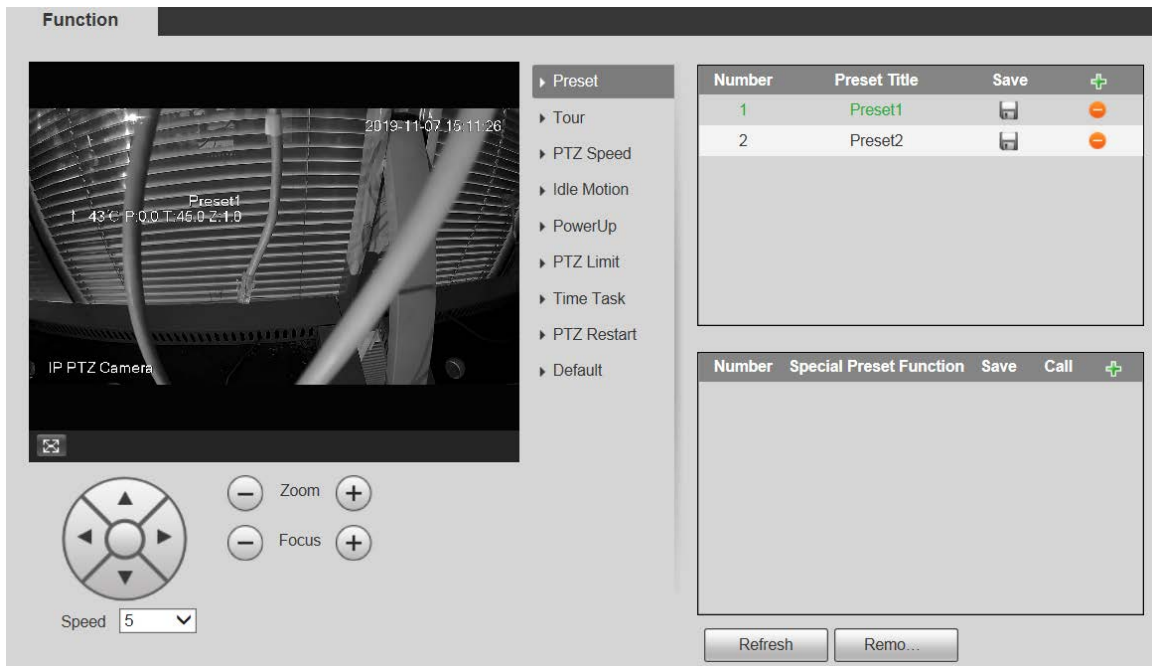Figure 5-70 Preset



5.4.2.1.1 Preset Settings

Preset means a certain position to which the Device rotates. Users can adjust the PTZ and camera to the location quickly through calling presets.

Step 1 At the lower left corner of the **Preset** interface, click the direction buttons, ,

, and to adjust the PTZ direction, speed, zoom, and focus of the Device.

Step 2 Click to add a preset.

The current position is set to a preset and is displayed in the list.

Figure 5-71 Add presets



Step 3 Click to save the preset.

Step 4 Perform operations on presets.

- Double-click the preset title to edit the title displayed on the monitoring screen.
- Click to delete the preset.

5.4.2.1.2 Special Preset Settings

Special presets serve as the shortcut for some special functions switch or calling, and they no longer represent the location of the PTZ camera.

Step 1 Click to add a special preset. The added special preset will be displayed in the list.



The number of special presets starts from 51 by default, and 100 is the largest number.

Figure 5-72 Special presets

| Number | Special Preset Function | Save | Call | |
|--------|-------------------------|------|------|--|
| 51 | Day/Night B&V | | | |
| 52 | Day/Night Colc | | | |

Step 2 Click to save the added special preset.

Step 3 Perform operations on special presets.



If the PTZ is restored to default settings, all preset configurations will be cleared, but the called function will remain.

Related Operations

- Click to modify the special preset function.
- Click to delete the special preset.
- Click to quickly call the function configured for the special preset.

5.4.2.2 Tour


Tour means a series of movements that the Device makes along several presets.



You need to set several presets in advance.

Step 1 Select **Setting > PTZ > Function > Tour**.

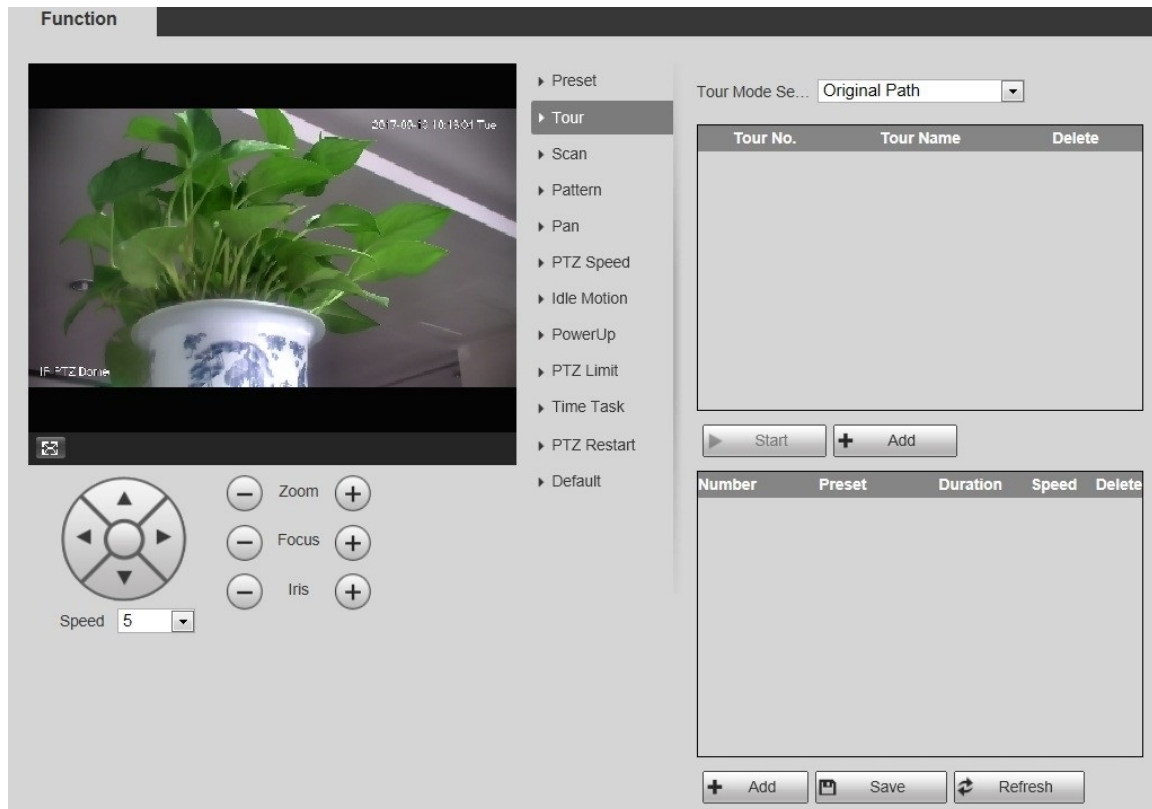Figure 5-73 Tour settings



Step 2 Select the **Tour Mode** from **Original Path** and **Shortest Path**. **Original Path** is selected by default.

- Original Path: Tour in the order of adding presets.
- Shortest Path: Starting from the preset with largest horizontal zoom value and vertical zoom value, pass all presets in the tour to ensure the shortest path. The Device reaches the corresponding preset and ensure the minimum number of rotation.

Step 3 Click **Add** at the bottom of the list at the upper right corner of the interface to add a tour path.

Step 4 Click **Add** at the bottom of the list at the lower right corner of the interface to add several presets.

Step 5 Perform tour operations.

- Double-click tour name to edit the name of the corresponding tour.
- Double-click duration to set the time that the Device stays at the corresponding preset.
- Double-click speed to modify the tour speed. The default value is 7, and the value range is 1–10. The larger the value, the faster the speed.

Step 6 Click **Start** to start the tour.




The ongoing tour stops if any operation is made to the PTZ.

5.4.2.3 Scan

Scan means the Device moves horizontally at a certain speed between the defined left and right limits.

Step 1 Select **Setting > PTZ > Function > Scan**.

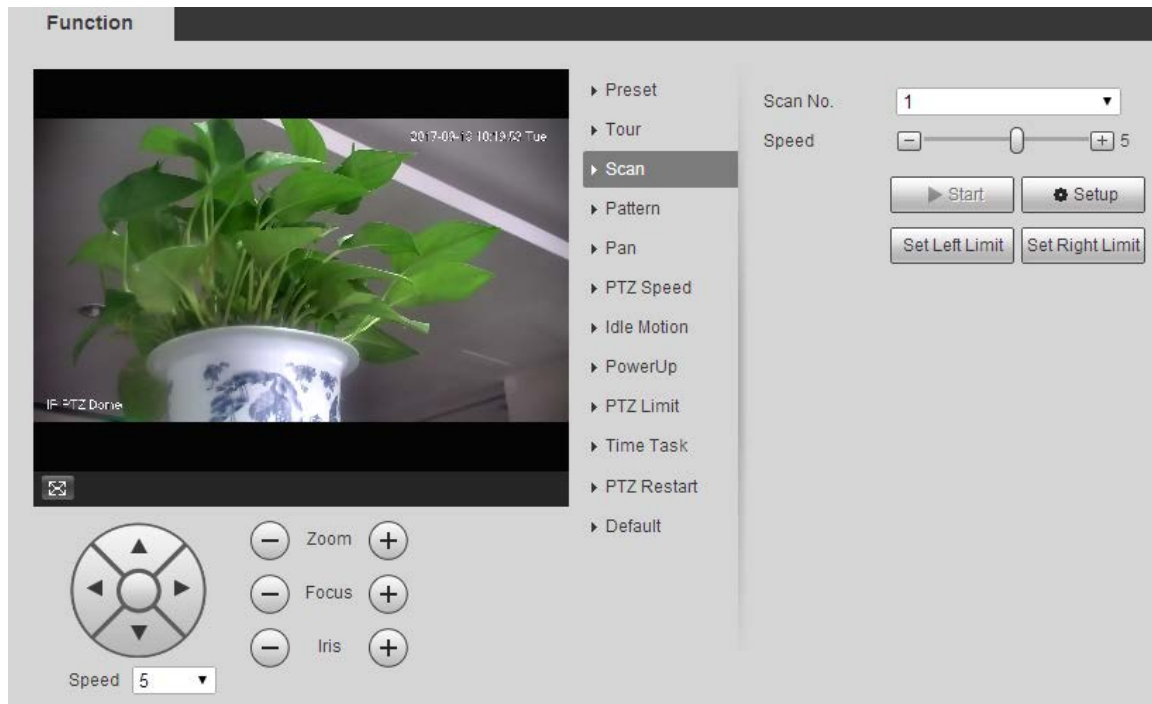Figure 5-74 Scan settings




- Step 2** Select the **Scan No.**
- Step 3** Drag the slider to adjust the scan speed.
- Step 4** Click **Setup** to adjust the Device to an ideal position.
- Step 5** Click **Set Left Limit** and **Set Right Limit** to set the left and right boundaries of the Device.
- Step 6** Click **Start**, and the Device starts scanning.
- Step 7** Click **Stop**, and the scanning stops.

5.4.2.4 Pattern

Pattern means a record of a series of operations that users make to the Device. The operations include horizontal and vertical movements, zoom and preset calling. Record and save the operations, and then you can call the pattern path directly.

- Step 1** Select **Setting > PTZ > Function > Pattern**.

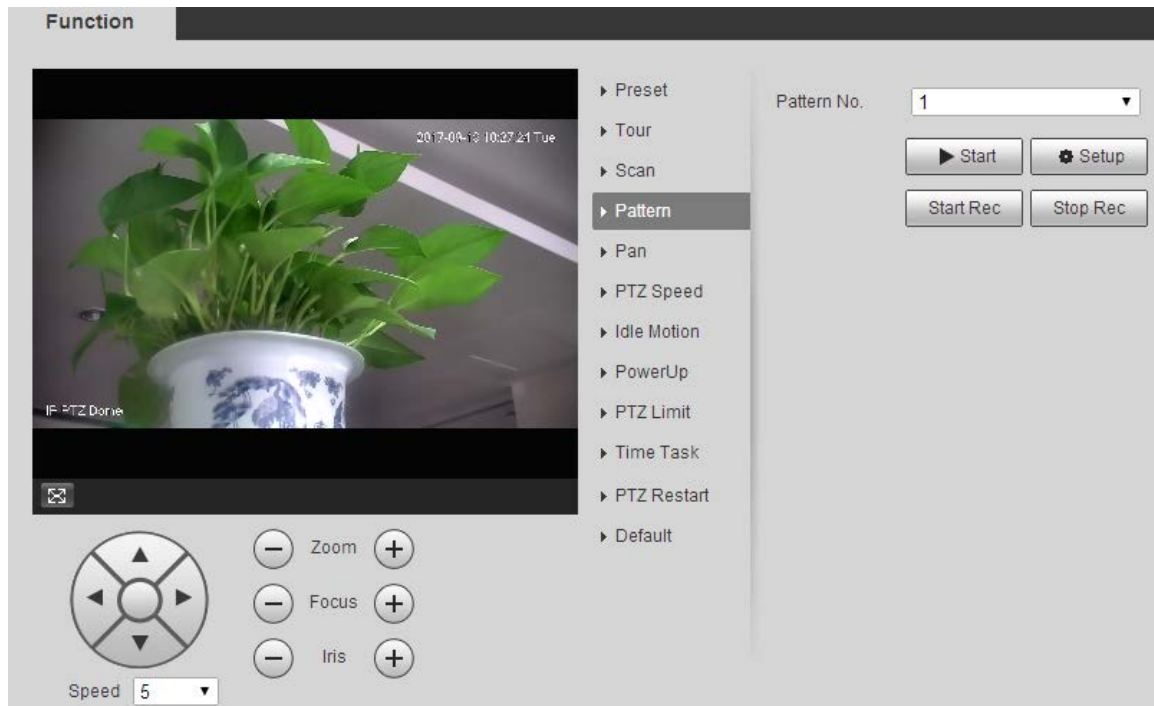Figure 5-75 Pattern settings



Step 2 Select the **Pattern No.**

Step 3 Click **Setup** and **Start Rec**, and then operate the PTZ as needed.

Step 4 Click **Stop Rec** to stop recording.

Step 5 Click **Start**, and the Device starts patterning.


Step 6 Click **Stop**, and the patterning stops.

5.4.2.5 Pan

Pan refers to the continuous 360° rotation of the Device at a certain speed.

Step 1 Select **Setting > PTZ > Function > Pan**.

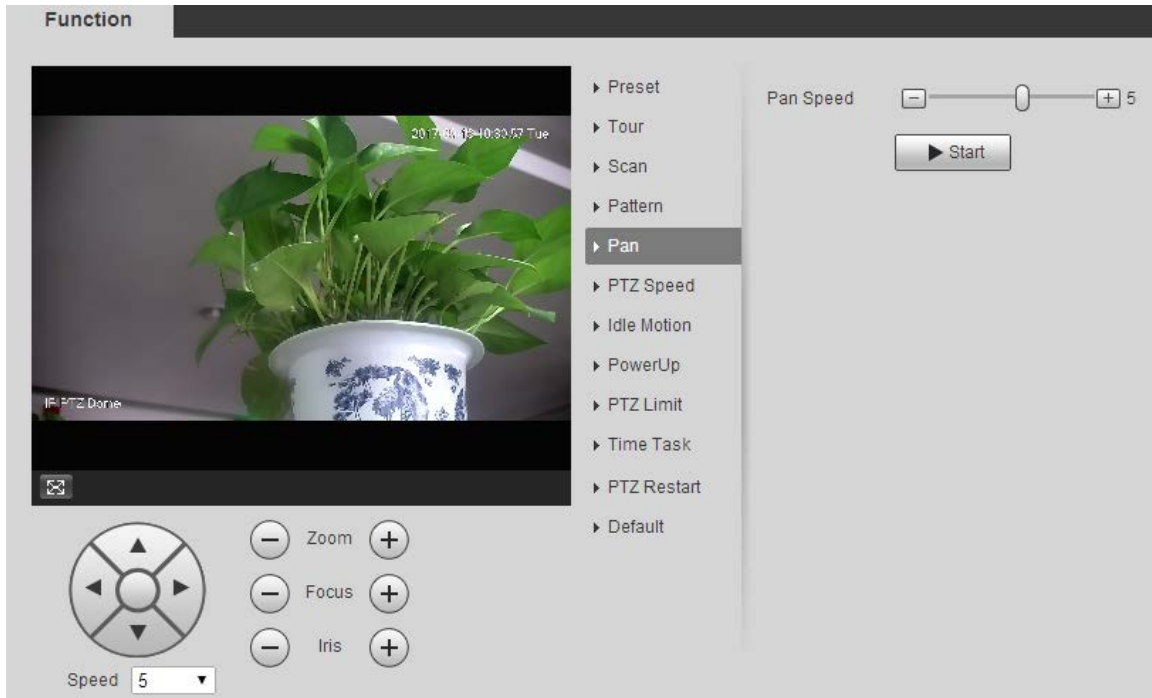Figure 5-76 Pan settings



Step 2 Drag the slider to set the **Pan Speed**.


Step 3 Click **Start**, and the Device starts to rotate horizontally at this speed.

5.4.2.6 PTZ Speed

You can adjust the manual control speed of the PTZ by setting PTZ speed. This speed does not apply to tour, pattern, or auto tracking.

Step 1 Select **Setting > PTZ > Function > PTZ Speed**.

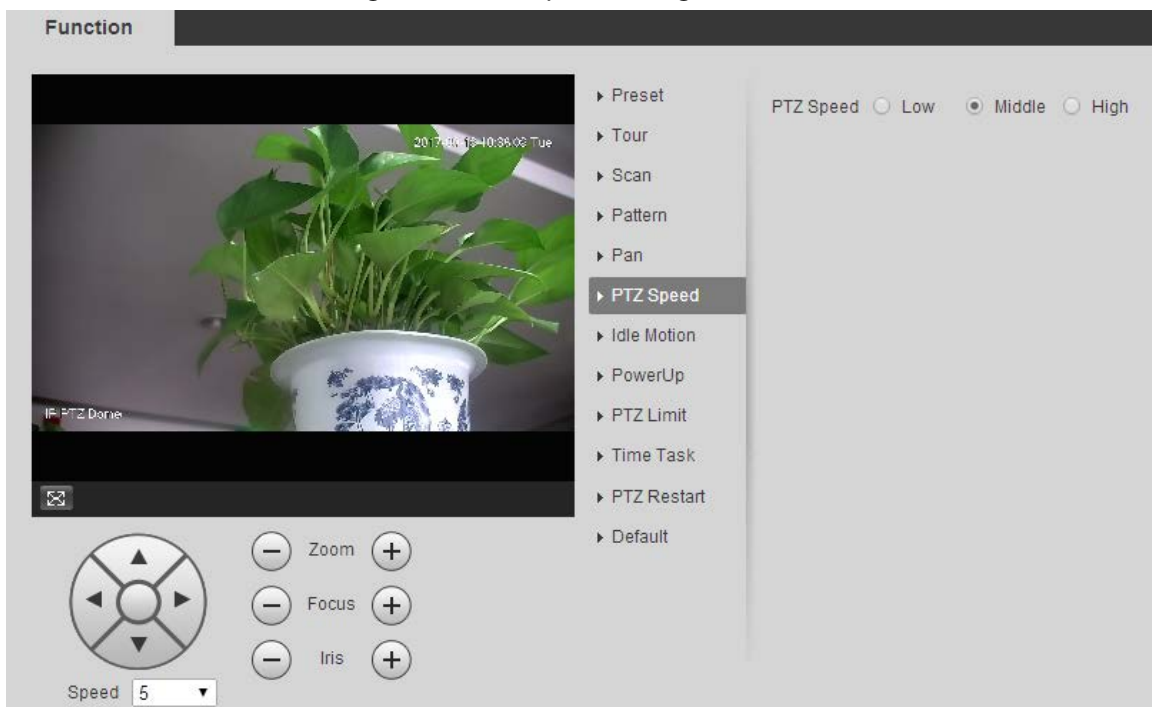Figure 5-77 PTZ speed settings



Step 2 Select **Low, Middle or High**.

5.4.2.7 Idle Motion


Idle motion refers to a set motion when the Device does not receive any valid command within a certain period.



Set **Preset, Tour, Scan** or **Pattern** in advance.

Step 1 Select **Setting > PTZ > Function > Idle Motion**.

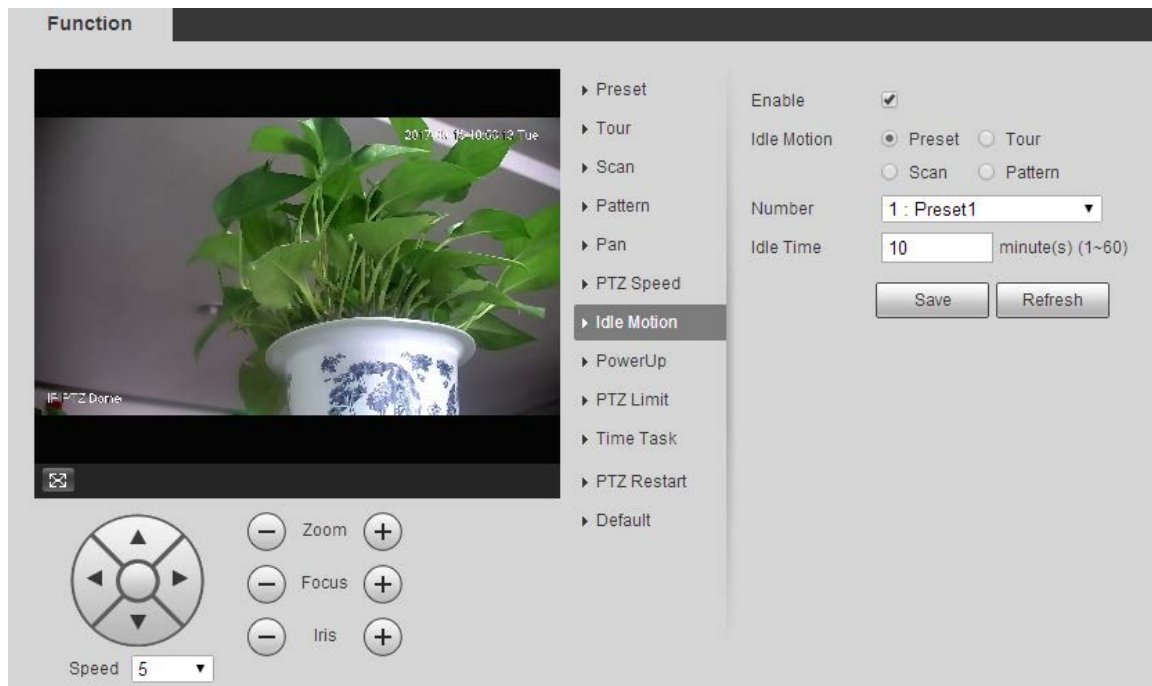Figure 5-78 Idle motion settings



Step 2 Select the **Enable** check box to enable the idle motion.

Step 3 Select idle motion from **Preset, Tour, Scan** and **Pattern**.

Step 4 Select the action number of the selected motion.

Step 5 Set **Idle Time** for the selected motion.

Step 6 Click **Save**.

5.4.2.8 PowerUp


PowerUp means the automatic operation of the Device after it is powered on.



Set **Preset, Tour, Scan** or **Pattern** in advance.

Step 1 Select **Setting > PTZ > Function > PowerUp**.

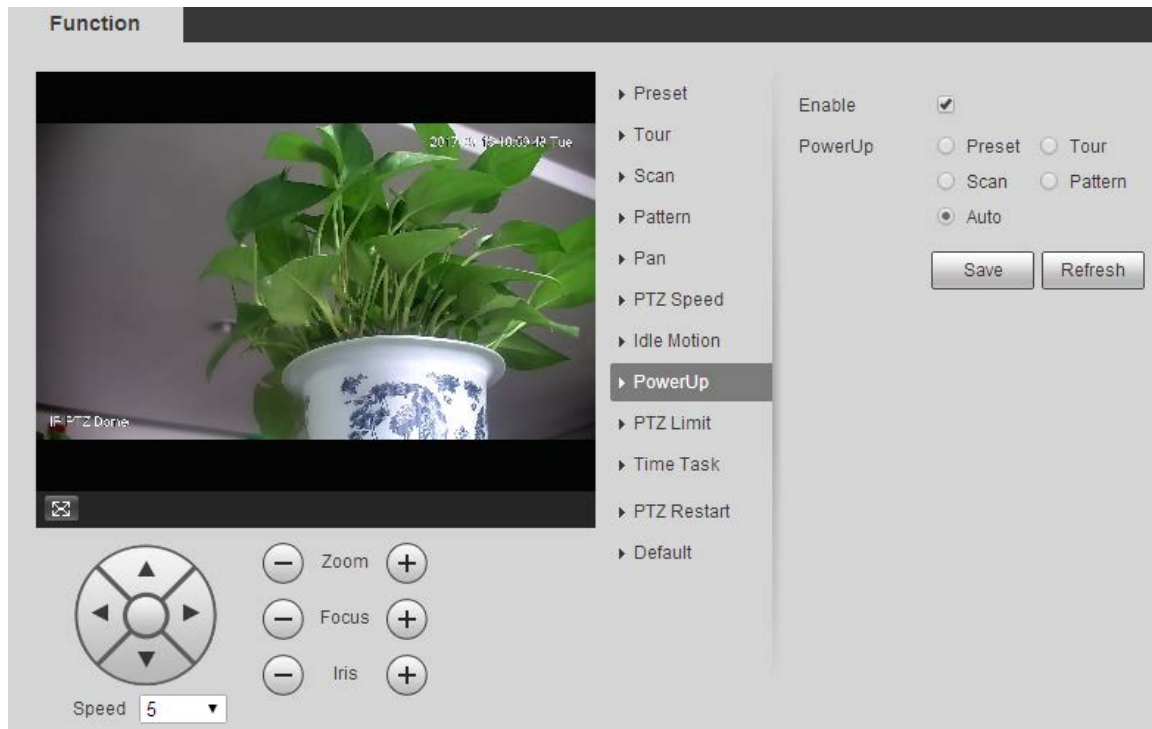Figure 5-79 PowerUp settings



Step 2 Select the **Enable** check box to enable power up motion.

Step 3 Select power up motion from **Preset, Tour, Scan, Pattern** or **Auto**.



Select **Auto** and the last motion before you shut down the Device last time will be performed.

Step 4 Select the action number of the selected motion.


Step 5 Click **Save**.

5.4.2.9 PTZ Limit

After you set the PTZ limit, the Device can only move in the defined area.

Step 1 Select **Setting > PTZ > Function > PTZ Limit**.

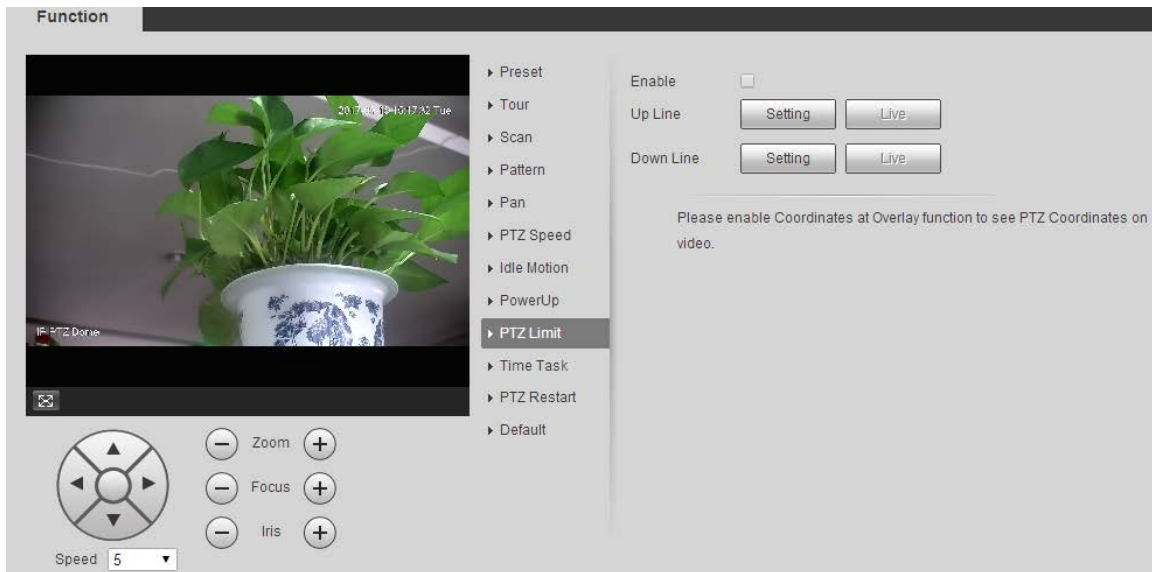Figure 5-80 PTZ limit settings



- Step 2** Adjust the PTZ direction and click **Setting** to set the **Up Line**.
- Step 3** Adjust the PTZ direction and click **Setting** to set the **Down Line**.
- Step 4** Click **Live** to preview the already-set up line and down line.
- Step 5** Select the **Enable** check box to enable the PTZ limit function.

5.4.2.10 Time Task


After you set time task, the Device performs the selected motions during the defined period.



Set **Preset**, **Tour**, **Scan** or **Pattern** in advance.

- Step 1** Select **Setting** > **PTZ** > **Function** > **Time Task**.

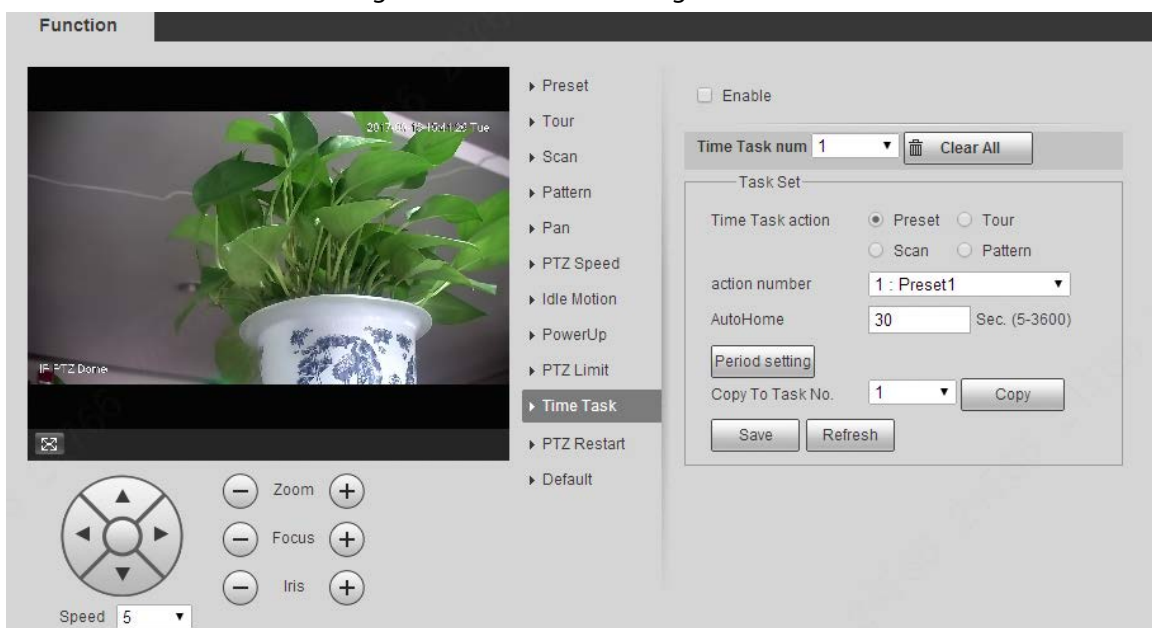Figure 5-81 Time task settings



- Step 2** Select the **Enable** check box to enable time task function.
- Step 3** Set the time task number.



Click **Clear All** to delete all set time tasks.

Step 4 Select **Time Task** action such as **Preset, Tour, Scan** or **Pattern**.

Step 5 Select the action number of the selected motion.

Step 6 Set the time for **AutoHome**.



AutoHome refers to the time needed to automatically recover the time task in case of manually calling the PTZ to stop the time task.

Step 7 Click **Period setting** to set the period to perform time tasks.

Step 8 Select the task number to copy settings to the selected task, and then click **Copy**.

Step 9 Click **Save**.

5.4.2.11 PTZ Restart

Step 1 Select **Setting > PTZ > Function > PTZ Restart**.

Figure 5-82 PTZ restart



Step 2 Click **PTZ Restart**.
The PTZ is restarted.

5.4.2.12 Default

With the function, you can restore the PTZ to factory defaults.



This function will restore the Device to defaults. Think twice before performing the operation.

Step 1 Select **Setting > PTZ > Function > Default**.

Figure 5-83 Default setting



Step 2 Click **Default**.

The PTZ will be restored to factory defaults.

5.5 Event Management

5.5.1 Video Detection


Video detection includes three event types: **Motion Detection**, **Video Tamper** and **Scene Changing**.

5.5.1.1 Motion Detection

When the moving object appears and moves fast enough to reach the preset sensitivity value, alarms will be triggered.

Step 1 Select **Setting > Event > Video Detection > Motion Detection**.

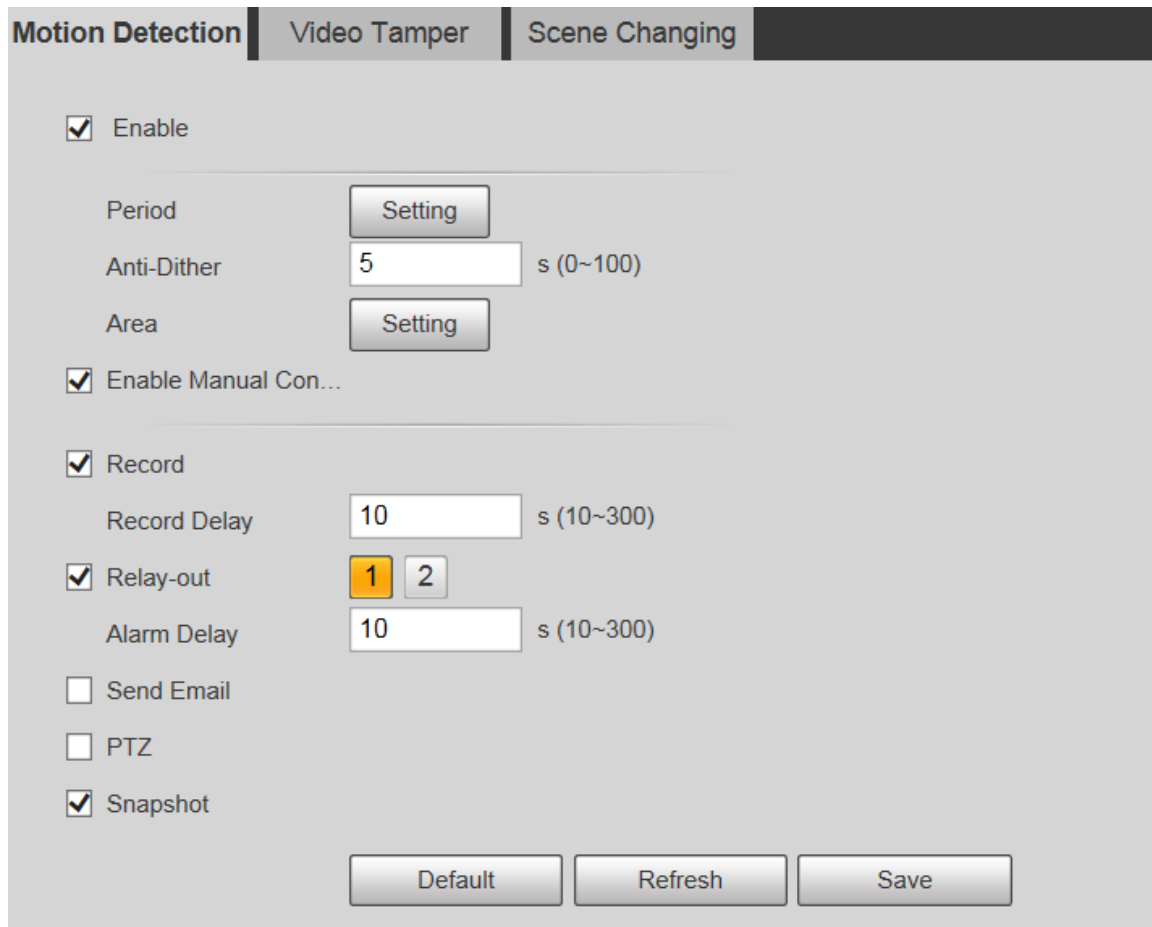Figure 5-84 Motion detection settings



Enable

Period

Anti-Dither s (0~100)

Area

Enable Manual Con...

Record

Record Delay s (10~300)

Relay-out

Alarm Delay s (10~300)

Send Email

PTZ

Snapshot

Step 2 Select the **Enable** check box, and then configure parameters as needed.

- Set arming and disarming period.
 1. Click **Setting**, and then set the arming period on the interface.

Figure 5-85 Arming period settings

2. Set the alarm period to enable alarm events in the period you set.
 - ◇ There are 6 time periods for each day. Select the check box for the time period to enable it.
 - ◇ Select the day of week (**Sunday** is selected by default; If **All** is selected, the setting is applied to the whole week. You can also select the check box next to the day to set it separately).
3. After completing the settings, click **Save**.

You will return to the **Motion Detection** interface.
- Set the area.

Click **Setting**, and the **Area** interface is displayed. See Figure 5-86. Refer to Table 5-25 and Table 5-26 for parameters description. Each color represents a certain region, and you can set different motion detection regions for each area. The detection region can be irregular and discontinuous.

Figure 5-86 Area setting

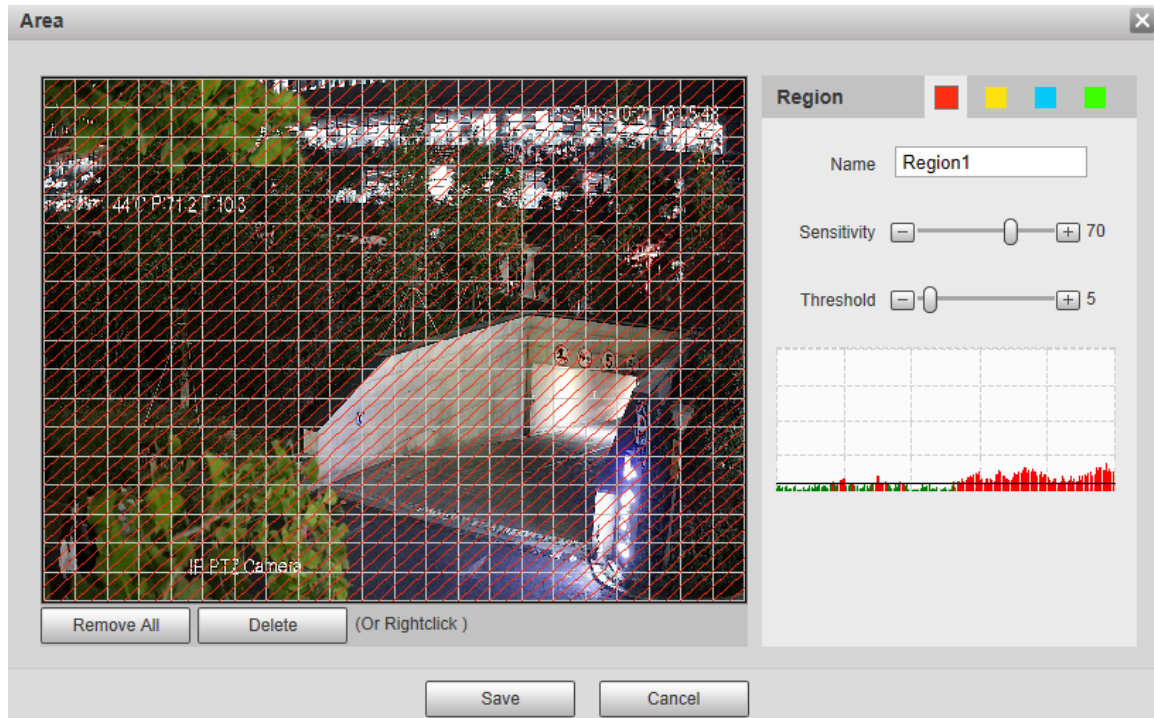


Table 5-25 Area setting parameter description

| Parameter | Description |
|----------------|--|
| Name | The default names are Region1, Region2, Region3 and Region4, and the names can be customized. |
| Sensitivity | Sensitivity to brightness change. The higher the sensitivity is, the easier the motion detection event will occur. You can set different sensitivities for each region, with values ranging from 0 to 100, and 30 to 70 is recommended. |
| Threshold | Detect the relation between the object and the region. The smaller the threshold is, the easier the motion detection will occur. Set different thresholds for each region, with values ranging from 0 to 100, and 1 to 10 is recommended. |
| Waveform graph | The red line indicates that motion detection is triggered, and the green line indicates that it is not triggered. |
| Remove All | Remove all detection regions. |
| Delete | Delete the detection region of the selected color block. |

- Other parameters

Table 5-26 Video detection parameter description

| Parameter | Description |
|-------------------------------|--|
| Anti-Dither | The system records only one motion detection event within the defined period. The value range is 0–100 s. |
| Enable Manual Control Trigger | After you enable the function, the motion detection events that occur when you control the PTZ manually will be excluded. In this way, you can reduce the false alarm rate of such events. |

| Parameter | Description |
|--------------|--|
| Record | After you enable the function, when an alarm is triggered, the system will start recording automatically. Before using the function, you need to set the recording period of the alarm in Storage > Schedule , and select Auto for Record Mode on the Record Control interface. |
| Record Delay | When the alarm is over, the alarm recording will continue for an extended period of time. The time unit is second, and the value range is 10–300. |
| Relay-out | Select the check box, and you can enable the alarm linkage output port, and link corresponding relay-out devices after an alarm is triggered. |
| Alarm Delay | When the alarm is over, the alarm will continue for an extended period of time. The time unit is second, and the value range is 10–300. |
| Send Email | After you select the check box, when an alarm is triggered, the system sends email to the specified email address. You can configure the email address in "5.2.5 SMTP (Email)." |
| PTZ | Select PTZ , and then configure the linkage action. When an alarm is triggered, the system links PTZ to rotate to the preset. The Activation options include None , Preset , Tour and Pattern . |
| Snapshot | Select the Snapshot check box, and then the system takes snapshot automatically when an alarm is triggered. You need to set the alarm snapshot period as described in "5.5.1.2 Snapshot." |


Step 3 Click **Save**.

5.5.1.2 Video Tamper

Alarms will be triggered if there is video tampering.

Step 1 Select **Setting > Event > Video Detection > Video Tamper**.

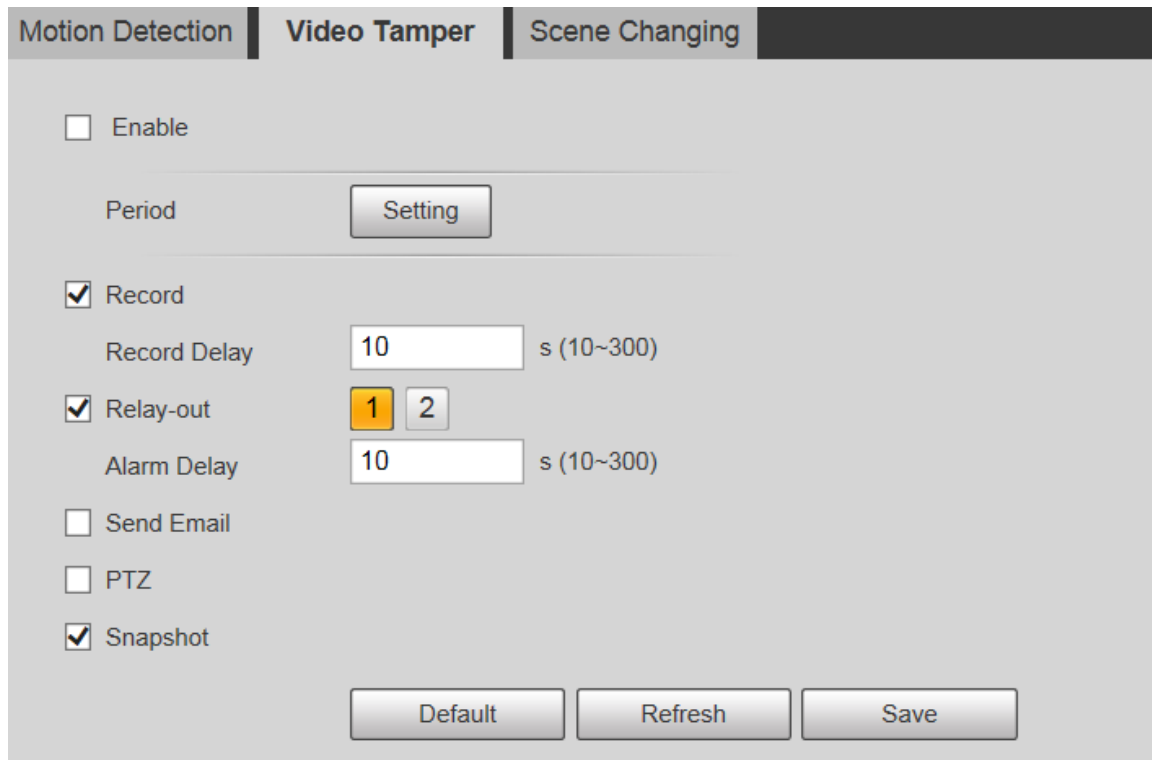Figure 5-87 Video tamper settings



Step 2 Select the **Enable** check box, and then configure parameters as needed.



For parameters configuration, see "5.5.1.1 Motion Detection".


Step 3 Click **Save**.

5.5.1.3 Scene Changing

Alarms will be triggered if there is scene changing.

Step 1 Select **Setting > Event > Video Detection > Scene Changing**.

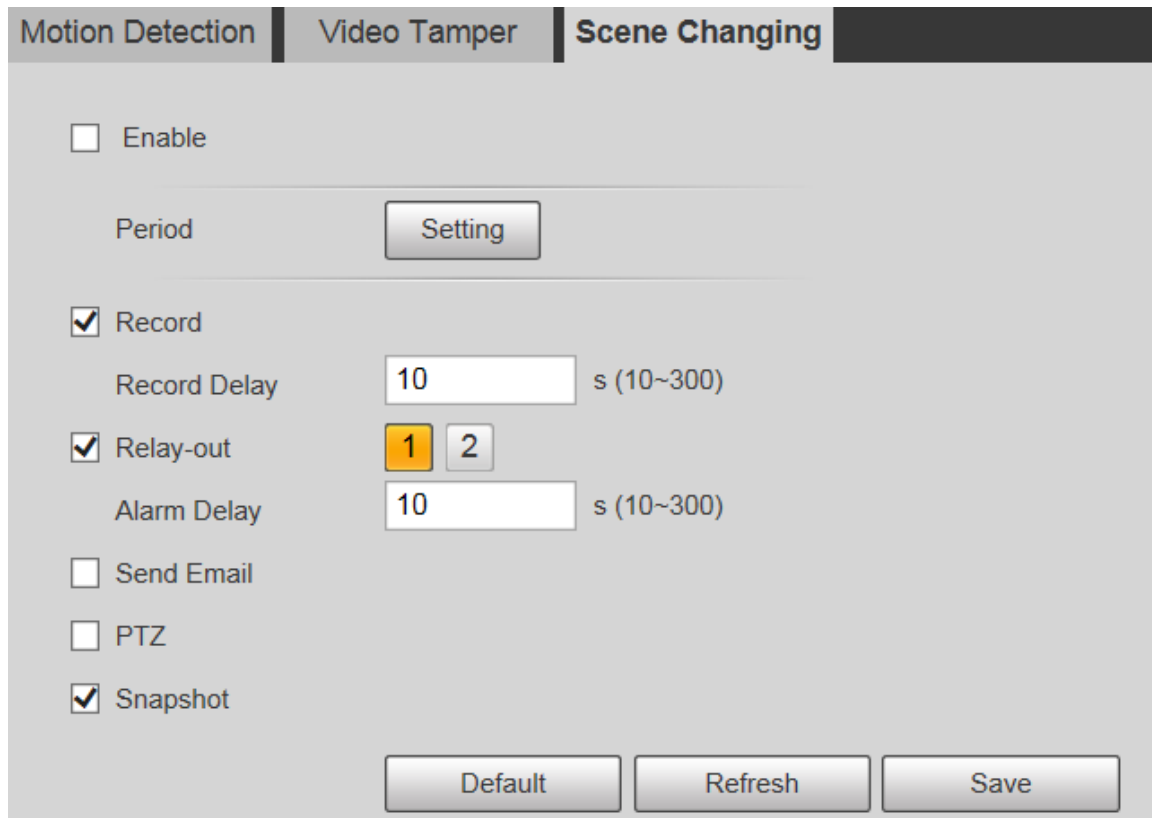Figure 5-88 Scene changing settings



Step 2 Select the **Enable** check box, and then configure parameters as needed.



For parameters configuration, see "5.5.1.1 Motion Detection".

Step 3 Click **Save**.

5.5.2 Smart Motion Detection

After you set smart motion detection, when the human, non-motor vehicles and motor vehicles appear and move fast enough to reach the preset sensitivity value, the alarm linkage actions will be performed. The function can help you to avoid the alarms triggered by natural environment change.



- The function depends on the result of motion detection, and all other parameters (except sensitivity) of motion detection function are used, including arming period, area settings, and linkage configurations. If no motion detection is triggered, smart motion detection will not be triggered.
- If motion detection is not enabled, when smart motion detection is enabled, motion detection will also be enabled. If both functions are enabled, when motion detection is disabled, smart motion detection will also be disabled.
- When smart motion detection is triggered and recording is linked, back-end devices can filter recording with human or vehicles through smart search function. For details, see the corresponding user's manual.


Prerequisites

- Select **Setting > Event > Video Detection > Motion Detection**, and then enable the motion detection function.
- Set the arming period and detection area. The sensitivity of each region is larger than 0, and the threshold is not equal to 100.

Procedure

1. Select **Setting > Event > Smart Motion Detection**.

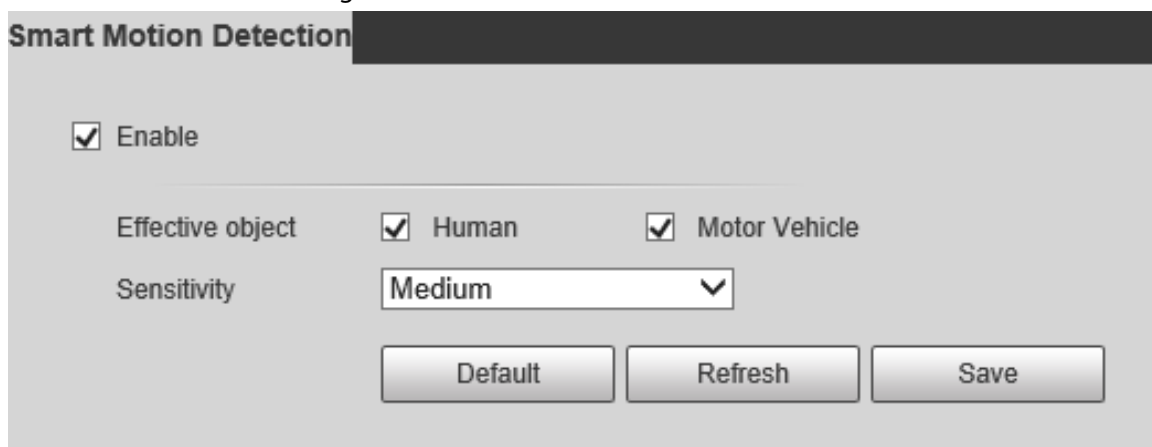Figure 5-89 Smart motion detection



2. Select the **Enable** check box, and then the **Smart Motion Detection** is enabled.
3. Select the effective object and sensitivity.
 - **Effective object:** Select **Human** or **Motor Vehicle**. When **Human** is selected, both people and non-motor vehicles will be detected.
 - **Sensitivity:** Select **High**, **Medium**, or **Low**. The higher the sensitivity, the easier the alarm is triggered.
4. Click **Save**.

5.5.3 Audio Detection

- Step 1 Select **Setting > Event > Audio Detection > Audio Detection**.

Figure 5-90 Audio detection settings

Audio Detection

Input Abnormal

Intensity Change

Sensitivity -
-
+
50

Threshold -
-
+
50

Period Setting

Anti-Dither s (0~100)

Record

Record Delay s (10~300)

Relay-out 1 2

Alarm Delay s (10~300)

Send Email

PTZ

Snapshot

Default
Refresh
Save

Step 2 Configure parameters as needed.

Table 5-27 Audio detection parameter description

| Parameter | Description |
|------------------|---|
| Input Abnormal | Select Input Abnormal , and then an alarm is triggered when there is abnormal audio input. |
| Intensity Change | Select Intensity Change , and then an alarm is triggered when the change in sound intensity exceeds the defined threshold. |
| Sensitivity | The value ranges from 1 to 100. The smaller this value is, the larger the input sound volume changes are needed for it to be judged as an audio anomaly. You need to adjust it according to the actual condition. |
| Threshold | The value ranges from 1 to 100. Configure the ambient sound intensity you need to filter. The louder the ambient noise is, the larger this value shall be. You need to adjust it according to the actual condition. |



For other parameters, see "5.5.1.1 Motion Detection".

Step 3 Click **Save**.

5.5.4 Smart Plan


Smart plans include IVS, face recognition, heat map, people counting, video metadata, construction monitoring and so on. Only after smart plans have been enabled, can the corresponding smart function come into effect.



Before configuring the smart plan, you need to set presets in advance. For setting methods, see "5.4.2.1 Preset".

Step 1 Select **Setting > Event > Smart Plan**.

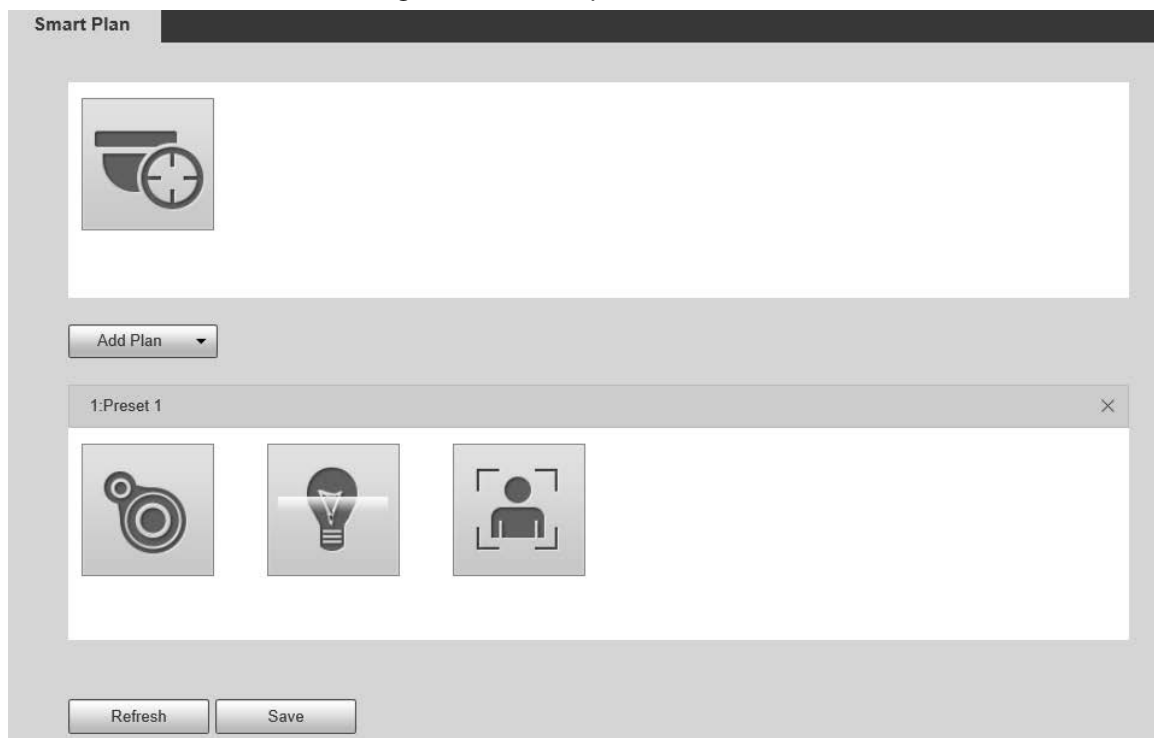Figure 5-91 Smart plan (1)




Step 2 (Optional) Click  to enable **Auto Tracking**.

When enabling auto tracking, you do not need to configure smart plans, and the Device performs auto tracking based on internal mechanism. If auto tracking and alarm track of the smart plan (such as IVS) are both enabled, the Device perform tracking in the order of triggering time.




It is recommended to disable auto tracking when alarm track is enabled to avoid disordered tracking.

Step 3 Click  to select the presets to be configured.

Step 4 Select smart plans as needed.

The selected function will be highlighted. Click it again to cancel the selection.

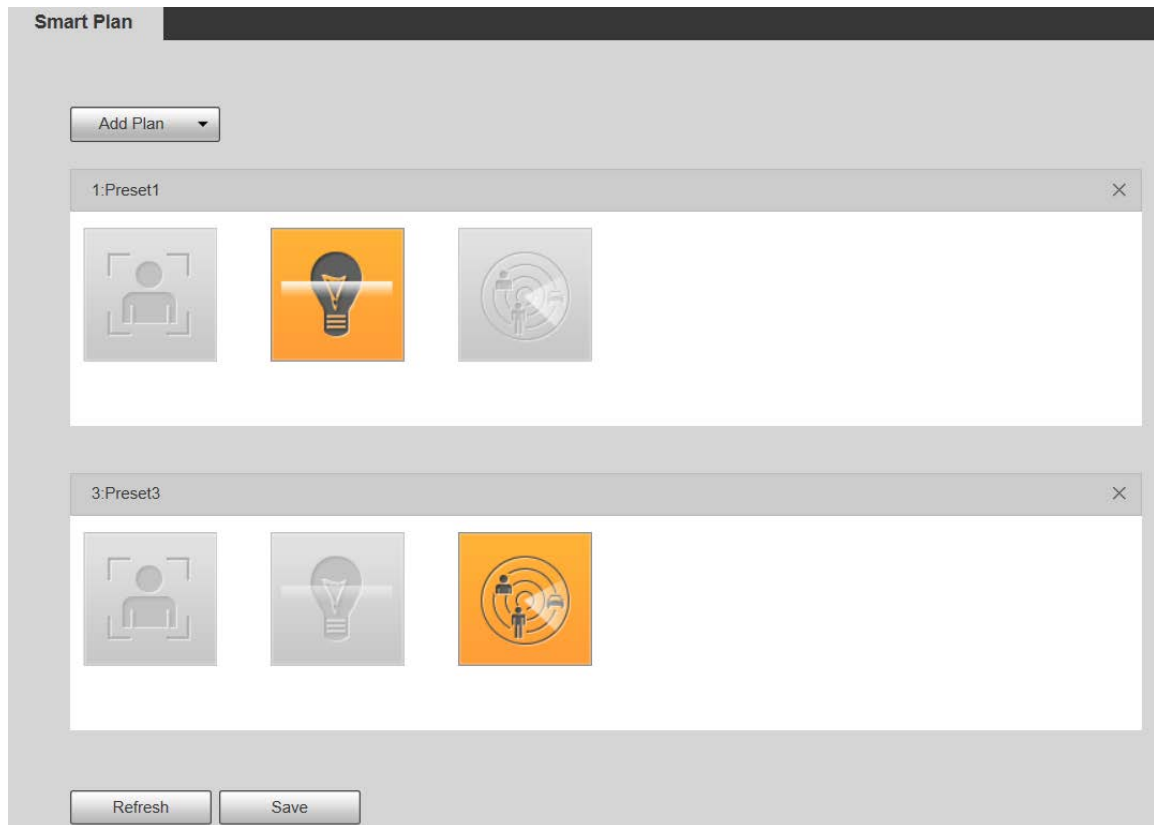Figure 5-92 Smart plan (2)



Step 5 Click **Save**.

5.5.5 IVS

Basic Requirements for the Scene

- The target size shall not exceed 10% of the image.
- The pixel of the target shall be no less than 10×10; the pixel of abandoned object shall be no less than 15×15 (CIF image); the width and height of the target shall be no more than 1/3 of the image. It is recommended that the height of the target is 10% of the image.
- The brightness difference between the target and the background is no less than 10 gray values.
- The target shall be present in the image for no less than 2 consecutive seconds, and the moving distance shall be larger than its width and no less than 15 pixels (CIF image).
- Try to reduce the complexity of monitoring scenes. It is not recommended to enable IVS in scenes with dense targets and frequent light changes.
- Try to avoid the following scenes: scenes with reflective surfaces such as glass, bright ground or water; scenes that disturbed by tree branches, shadows or winged insects; scenes that against light or under direct light exposure.




Before using the function, you need to set presets in advance. For setting methods, see "5.3.2.1 Preset."

Rule Config

1. Select **Setting** > **Event** > **IVS** > **Rule Config**.

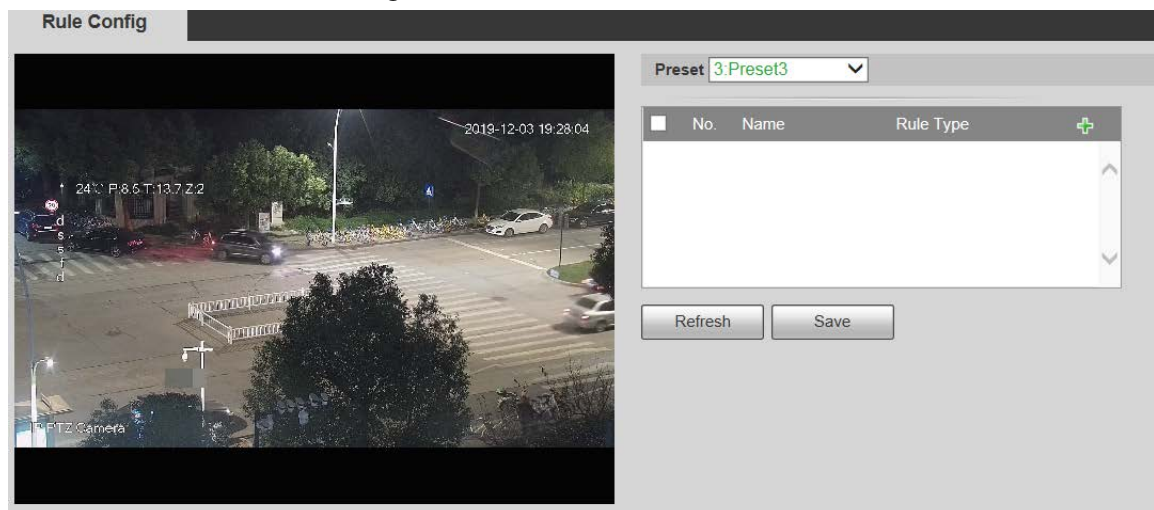Figure 5-93 Add smart rules



2. Select the presets to be configured with smart rules.
3. Click to add smart rules.



Double-click rule type to modify the type of rules.

4. Click **Save**.

5.5.5.1 Tripwire


Alarms are triggered when the target crosses the warning line in the defined direction. It requires certain stay time and moving space for the target to be confirmed, so you need to leave some space at both sides of the warning line during configuration and do not draw it near obstacles.

Applicable scenes: Scenes with sparse targets and no occlusion between targets, such as perimeter protection of unattended areas.

Procedure

Step 1 Select **Tripwire** from the **Rule Type** list.

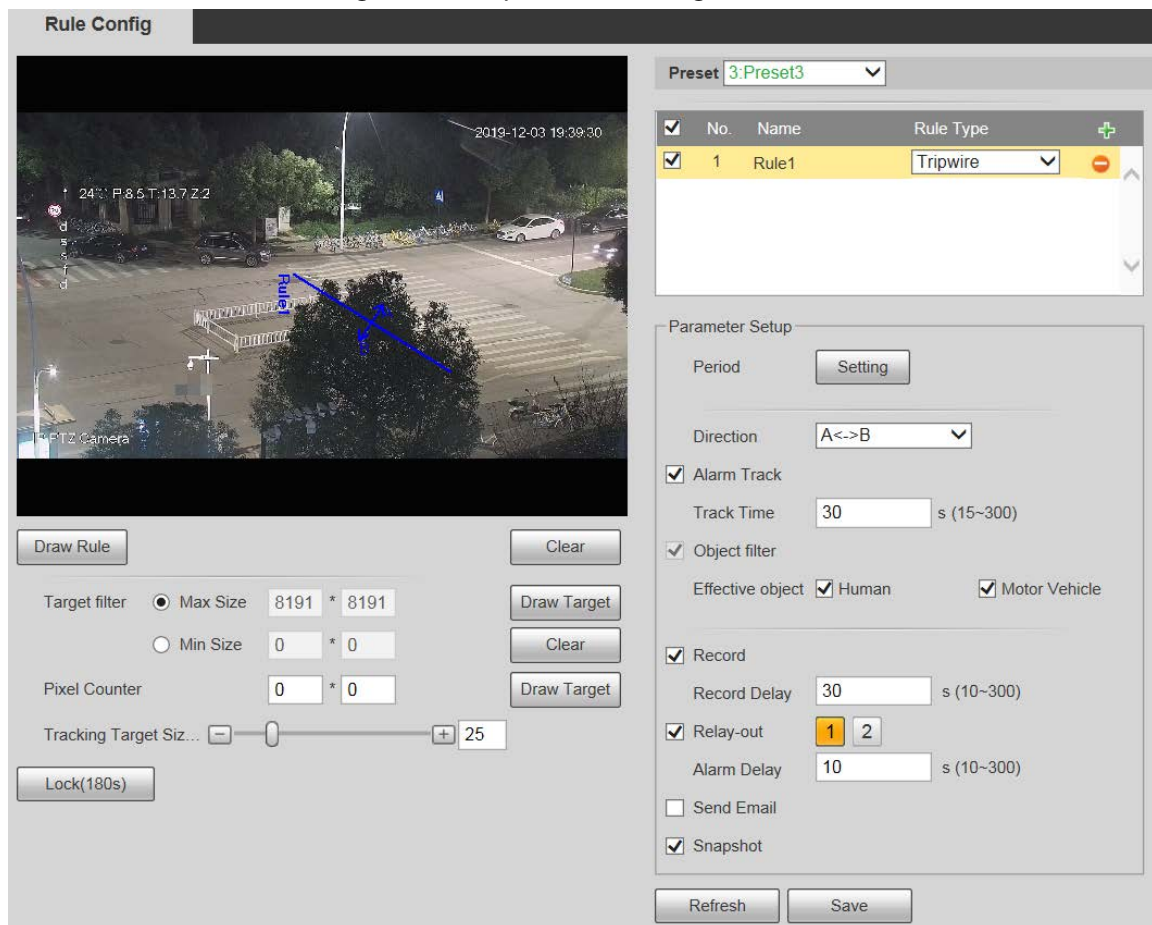Figure 5-94 Tripwire rule settings




Step 2 Click **Draw Rule**, and you can draw rules on the monitoring screen.



Click **Clear** to the right of **Draw Rule** to clear all drawn rules.

Table 5-28 Rule drawing parameter description

| Parameter | Description |
|-----------|--|
| Max Size | Set the size range of detection targets to be filtered, and select the |

| Parameter | Description |
|---------------|--|
| Min Size | maximum or minimum size. <ul style="list-style-type: none"> • Max Size: Set the maximum size of targets to be filtered. When the target is larger than this size, the system will ignore it. The unit is pixel. • Min Size: Set the minimum size of targets to be filtered. When the target is smaller than this size, the system will ignore it. The unit is pixel. |
| Pixel Counter | Help to accurately draw the target area. Enter the length and width of the target area in Pixel Counter , and click Draw Target to generate the target area in the monitoring screen. The unit is pixel. |
| Lock/Unlock | Enter the rule configuration interface, and the locking function will be automatically enabled, and the locking time is 180 s. During this period, the device cannot track the target. Click Unlock to release the control.  The locking function only takes effect in the rule configuration interface. After switching to the Live interface, the Device can track the target normally. |

Step 3 Configure parameters as needed.

Table 5-29 Tripwire parameter description

| Parameter | Description |
|--------------|--|
| Period | Set the alarming period to enable alarm events in the defined period. <ol style="list-style-type: none"> 1. Click Setting, and then the Period interface is displayed. 2. Enter the time value or press and hold the left mouse button, and drag directly on the setting interface. There are six periods for each day. Select the check box next to the period for it to take effect. 3. Select the day of week (Sunday is selected by default; If All is selected, the setting is applied to the whole week. You can also select the check box next to the day to set it separately). 4. After completing the setting, click Save to go back to the rule configuration interface. |
| Direction | Configure the tripwire direction. You can select A->B , B->A or A<->B . |
| Alarm Track | Select the check box, and there will be alarm tracking when a smart rule is triggered. |
| Track Time | Set the alarm tracking time. |
| Record | Select the check box, and when an alarm is triggered, the system will start recording automatically. Before using the function, you need to set the recording period of the alarm in Storage > Schedule , and select Auto for Record Mode on the Record Control interface. |
| Record Delay | When the alarm is over, the recording will continue for an extended period of time. The value range is 10–300 s. |
| Relay-out | Select the check box, and you can enable the alarm linkage output port, and link corresponding relay-out devices when an alarm is triggered. |

| Parameter | Description |
|-------------|--|
| Alarm Delay | When the alarm is over, the alarm will continue for an extended period of time. The value range is 10–300 s. |
| Send Email | Select the Send Email check box, and when an alarm is triggered, the system sends an email to the specified mailbox. You can configure the mailbox in Setting > Network > SMTP (Email) . |
| Snapshot | Select the check box, and the system will automatically take snapshots in case of alarms. You need to set snapshot period in Storage > Schedule . |

Step 4 Click **Save**.

5.5.5.2 Intrusion

Intrusion includes crossing areas and in-area functions.

- Crossing area means an alarm will be triggered when a target enters or leaves the area.
- In-area function means an alarm will be triggered when a specified number of targets appear in a set alarming area at a given time. In-area function only counts the number of targets in the detection area, regardless of whether they are the same targets.
- For the reporting time interval of the in-area functions, the system will trigger the first alarm and then detect whether the same event occurs in the interval period. If no same event occurs in this period, the alarm counter will be cleared.


Similar to the warning line, to detect an entry/exit event, a certain movement space should be reserved at the periphery of the area line.

Applicable scenes: Scenes with sparse targets and no occlusion between targets, such as perimeter protection of unattended areas.

Procedure

Step 1 Select **Intrusion** from the **Rule Type** list.

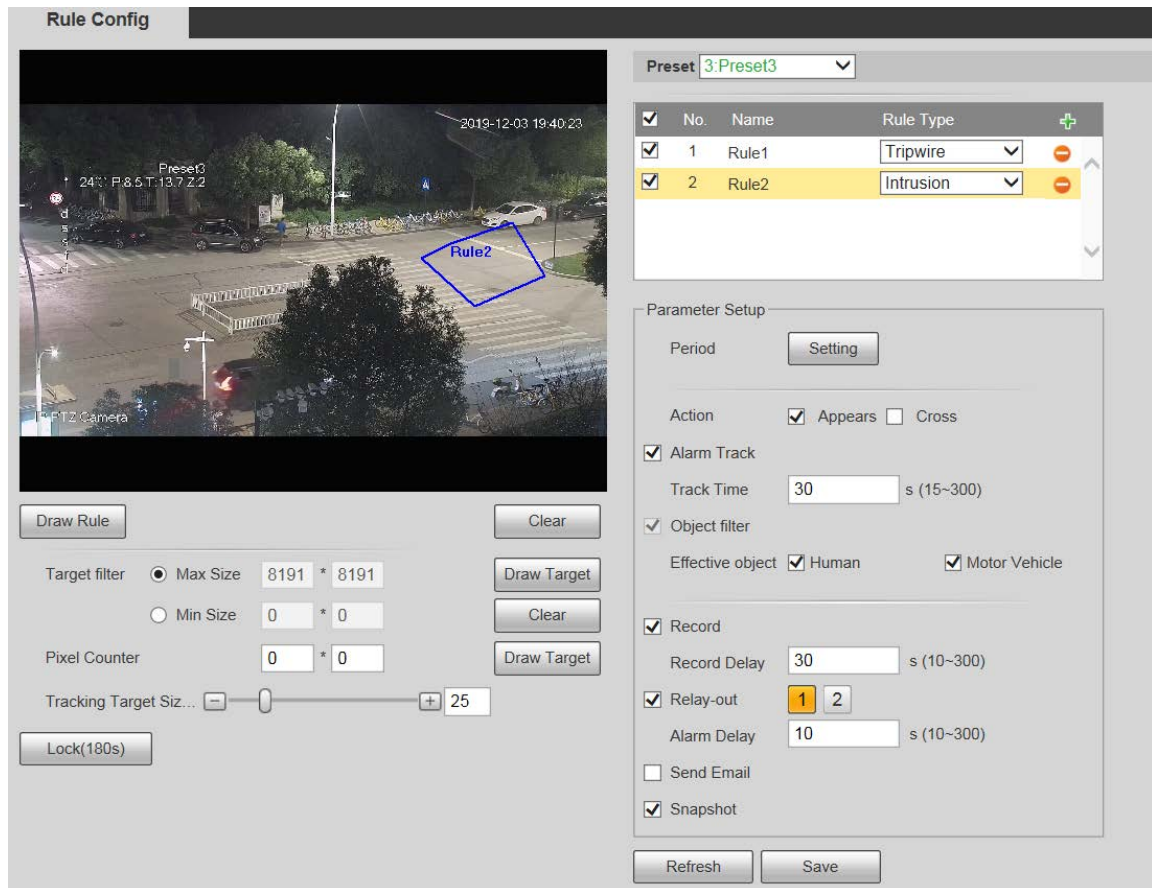Figure 5-95 Intrusion settings



Step 2 Click **Draw Rule**, and you can draw rules on the monitoring screen.
For parameter description, see Table 5-28.



Click **Clear** to the right of **Draw Rule** to clear all drawn rules.

Step 3 Configure parameters as needed.

Table 5-30 Intrusion parameter description

| Parameter | Description |
|-----------|---|
| Action | Configure intrusion action, and you can select Appear or Cross . |
| Direction | Select the crossing direction from Enters , Exits , and Enter & Exit . |



For other parameters, see "5.5.5.1 Tripwire".

Step 4 Click **Save**.

5.5.5.3 Abandoned Object

An alarm will be triggered when the selected target in the monitoring scene stays in the screen for more than the defined time.


Pedestrians or vehicles that stay for too long would be regarded as abandoned objects. To filter out such alarms, you can use **Target filter**. In addition, the duration can be properly extended to avoid false alarm due to a short stay of people.

Applicable scenes: Scenes with sparse targets, no obvious and frequent light changes. For scenes with intensive targets or too many obstacles, missed alarms would increase; for scenes in which too many people stay, false alarms would increase. Select detection areas with simple texture, because this function is not applicable to scenes with complex texture.

Procedure

Step 1 Select **Abandoned Object** from the **Rule Type** list.

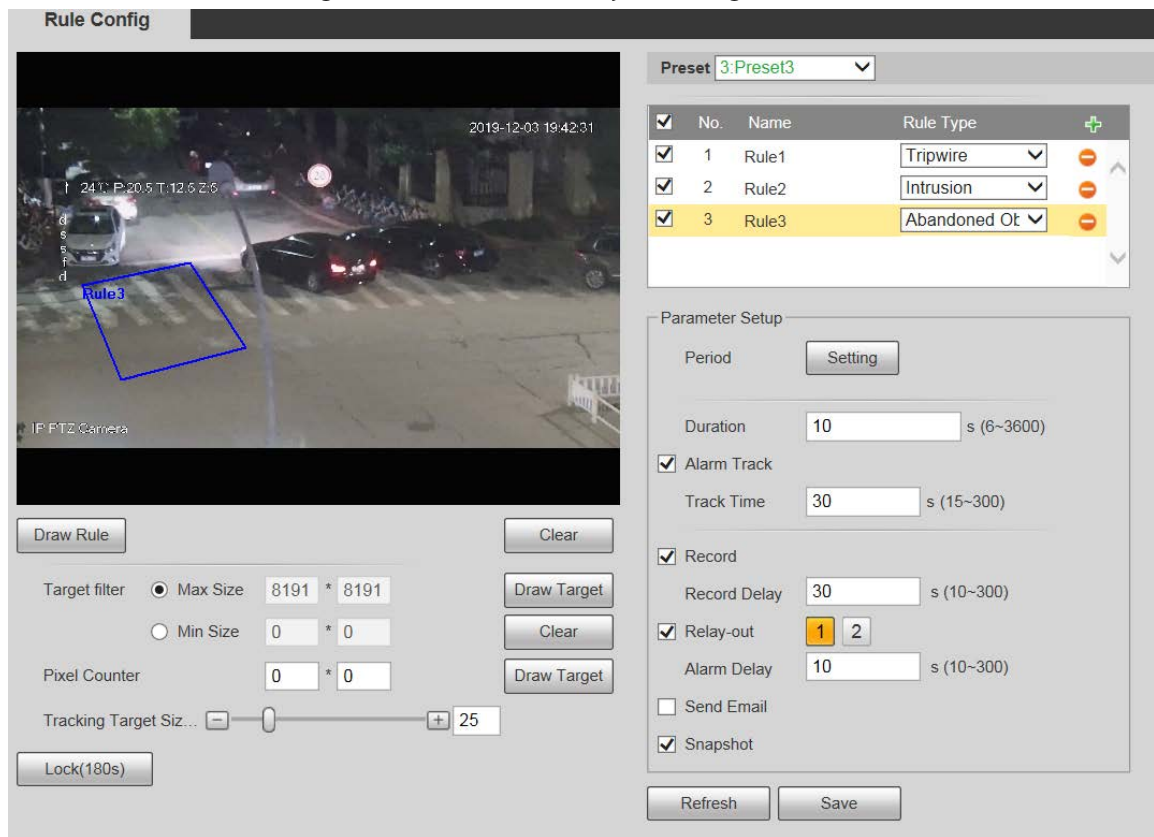Figure 5-96 Abandoned object settings



Step 2 Click **Draw Rule**, and you can draw rules on the monitoring screen. For parameter description, see Table 5-28.



Click **Clear** to the right of **Draw Rule**, and you can clear all drawn rules.

Step 3 Configure parameters as needed.

Table 5-31 Abandoned object parameter description

| Parameter | Description |
|-----------|---|
| Duration | For abandoned object, the duration is the shortest time to trigger an alarm after an object is abandoned. |



For other parameters, see "5.5.5.1 Tripwire".

Step 4 Click **Save**.

5.5.5.4 Missing Object

An alarm will be triggered when the selected target in the scene is taken away for the time longer than the set duration.


The system analyzes static areas from the foreground, and determines whether it is missing object or abandoned object from the similarity of its foreground and background. When the time exceeds the set period, an alarm is triggered.

Applicable scenes: Scenes with sparse targets, no obvious and frequent light changes. For scenes with intensive targets or too many obstacles, the missed alarm would increase; for scenes in which too many people stay, the false alarm would increase. Keep the detection area texture as possible simple as possible, because this function is not applicable to scenes with complex texture.

Procedure

Step 1 Select **Missing Object** from the **Rule Type** list.

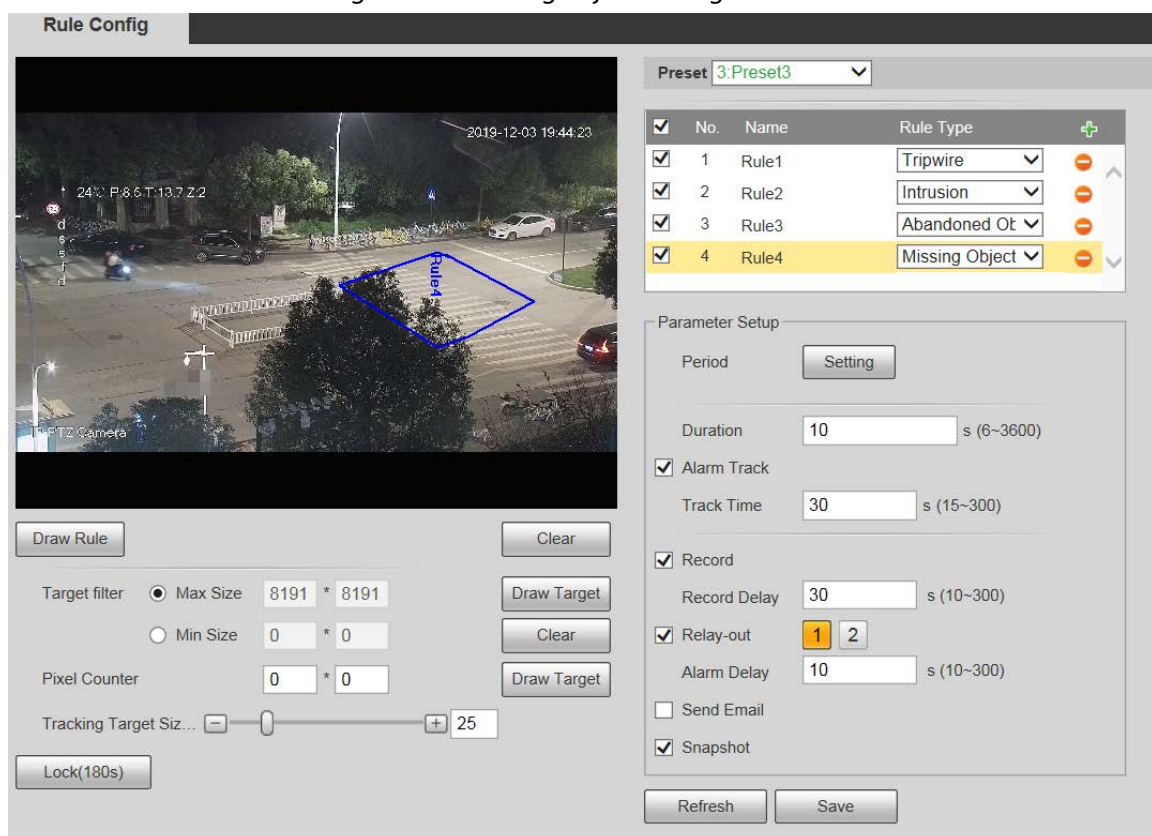Figure 5-97 Missing object setting



Step 2 Click **Draw Rule**, and you can draw rules on the monitoring screen.
For parameter description, see Table 5-28.



Click **Clear** to the right of **Draw Rule** to clear all drawn rules.

Step 3 Configure parameters as needed.

Table 5-32 Missing object parameter description

| Parameter | Description |
|-----------|--|
| Duration | Configure the shortest time from the object disappearing to the alarm being triggered. |



For other parameters, see "5.5.5.1 Tripwire".

Step 4 Click **Save**.

5.5.6 Construction Monitoring

The Device can be used for construction monitoring which include helmet detection, workwear detection, lone working detection and absence detection.

Prerequisites

Select **Setting** > **Event** > **Smart Plan**, and then enable **Construction Monitoring**.

Procedure

Step 1 Select **Setting** > **Event** > **Construction Monitoring**.

Step 2 Select **Global** or a preset from the **Preset** list.

- If global plan is selected, detection area and rule are set by default, and the detection area cannot be changed.
- If a preset is selected, you need to set detection area and rule manually. The following section takes selecting Preset 1 as an example.

Figure 5-98 Global plan


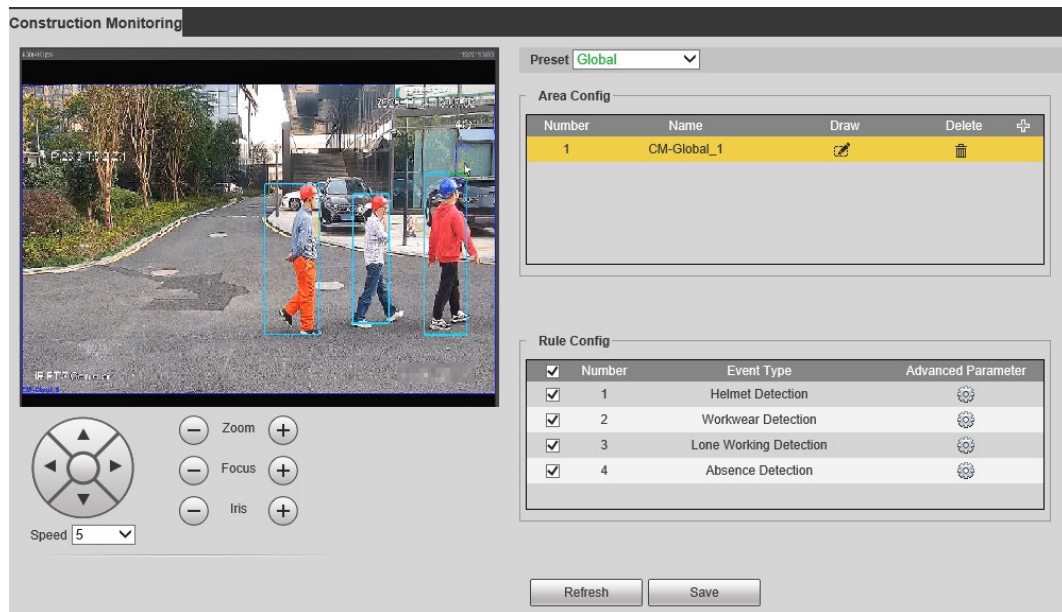


Figure 5-99 Plan by preset

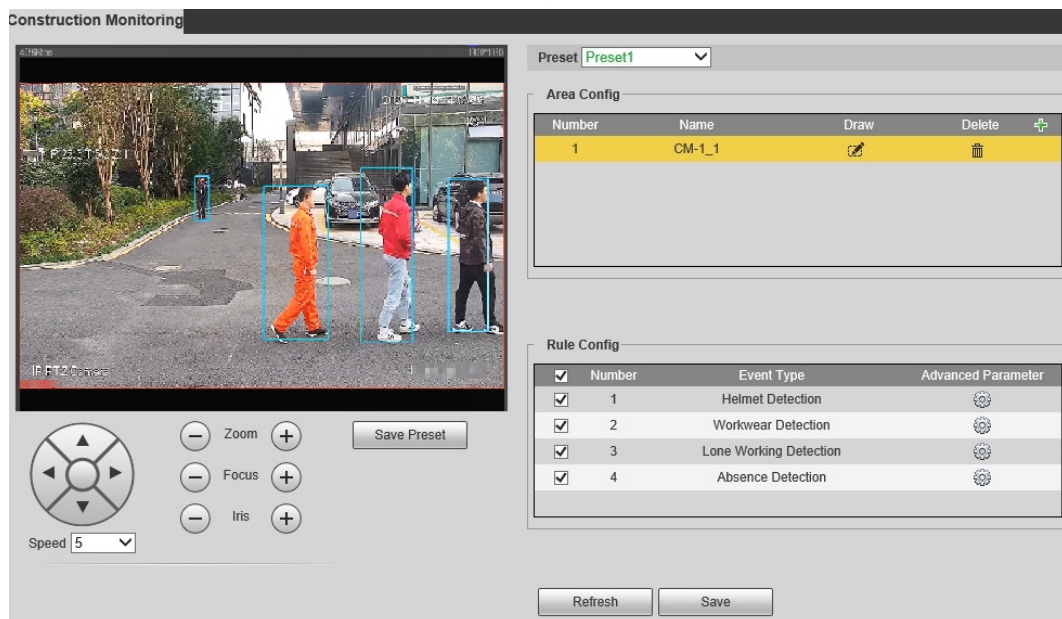

Step 3 Click at the upper-right corner of the **Area Config** section.



Double click the rule name to modify it.

Step 4 Click to draw rule box on the video image, and then right-click to complete drawing.



- After drawing is complete, drag the corners of the drawn area to adjust the detection area.
- If you select preset plan, 8 detection areas can be drawn at most.

Step 5 Select the check box before the event type to enable the corresponding detection rule.

Table 5-33 Rule description

| Rule | Description |
|------------------------|---|
| Helmet Detection | When the Device detects person not wearing helmet or not wearing helmet in the specified color, alarm linkage actions will be performed. |
| Workwear Detection | When the Device detects person not wearing workwear in accordance with the rule, alarm linkage actions will be performed. The rule for workwear is long-sleeved tops and trousers in the same color. If short-sleeved shirts, shorts or different colors are detected, it means the rule is not followed. |
| Lone Working Detection | When the Device detects a single person working in the detection area, alarm linkage actions will be performed. |
| Absence Detection | When the Device detects nobody working in the detection area, alarm linkage actions will be performed. |


Step 6 Click  next to the detection rule, configure parameters on the **Advanced Parameter** interface, and then click **Save**.

Figure 5-100 Helmet detection

Advanced Parameter

Rule Parameter

Allowed Color

White Yellow Red Blue

Duration s (1~3600)

Repeat Alarm Time s (10~3600)

Record

Record Delay s (10~300)

Relay-out

Alarm Delay s (10~300)

Send Email

Audio Linkage

Play Count (1~3)

File

Message Link

Snapshot

Period

Figure 5-101 Workwear detection

Advanced Parameter

Rule Parameter

Duration s (1~3600)

Repeat Alarm Time s (10~3600)

Record

Record Delay s (10~300)

Relay-out

Alarm Delay s (10~300)

Send Email

Audio Linkage

Play Count (1~3)

File

Message Link

Snapshot

Period

Figure 5-102 Lone working detection

Figure 5-103 Absence detection

Table 5-34 Parameter description

| Parameter | Description |
|---------------|--|
| Allowed Color | When configuring helmet detection, you can set allowed colors. When the helmet detected is not in the selected colors, alarms will be triggered. |

| Parameter | Description |
|-------------------|--|
| Duration | When events not following the rule are detected and the duration exceeds the defined value, alarms will be triggered. For example, when the duration of helmet detection is 5 seconds, if the Device detects a person not wearing helmet or the helmet color is not allowed for more than 5 seconds, an alarm will be triggered. |
| Repeat Alarm Time | After an alarm is triggered, when the event lasts for the time reaching repeated alarm time, an alarm will be triggered again. |
| Record | After you enable the function, when an alarm is triggered, the system will start recording automatically. Before using the function, you need to set the recording period of the alarm in Storage > Schedule , and select Auto for Record Mode on the Record Control interface. |
| Record Delay | When an alarm is over, the alarm recording will continue for an extended period of time. |
| Relay-out | Select the check box, and you can enable the alarm linkage output port, and link corresponding relay-out devices after an alarm is triggered. |
| Alarm Delay | When an alarm is over, the alarm will continue for an extended period of time. |
| Send Email | After you select the check box, when an alarm is triggered, the system sends email to the specified email address. You can configure the email address in "5.2.8 SNMP". |
| Audio Linkage | Select the check box to play alarm audio when alarms are triggered. You can set the play count and select the audio file. For how to set the audio file, see "5.1.3.2 Configuring Alarm Audio". |
| Message Link | Select the check box to receive message when alarms are triggered. |
| Snapshot | Select the check box, and the system will automatically take snapshots in case of alarms. You need to set snapshot period in Storage > Schedule . |
| Period | Set the alarm period to enable alarm events in the defined period. <ol style="list-style-type: none"> 1. Click Setup, and the Period interface is displayed. 2. Enter the time value or press and hold the left mouse button, and drag directly on the setting interface. There are six periods for each day. Select the check box next to the period for it to take effect. 3. Select the day of week (Sunday is selected by default; If All is selected, the setting is applied to the whole week. You can also select the check box next to the day to set it separately). 4. After completing the setting, click Save to go back to the rule configuration interface. |

Step 7 Click **Save** on the **Construction Monitoring** interface.



If you want to see the alarm information on the **Alarm** tab, you need to subscribe the corresponding alarm type. For details, see "6 Alarm".

Result

Click the **AI Live** tab to view construction monitoring results. For details, see "3.2 AI Live Settings".

5.5.7 Face Recognition

The function can detect faces and compare them with those in the configured face database.




- Select **Setting > Event > Smart Plan**, and then enable face recognition.
- This function is available on select models.

5.5.7.1 Face Detection

When human face is detected in the monitoring screen, an alarm is triggered and the linked action is performed.

Step 1 Select **Setting > Event > Face Recognition > Face Detection**.

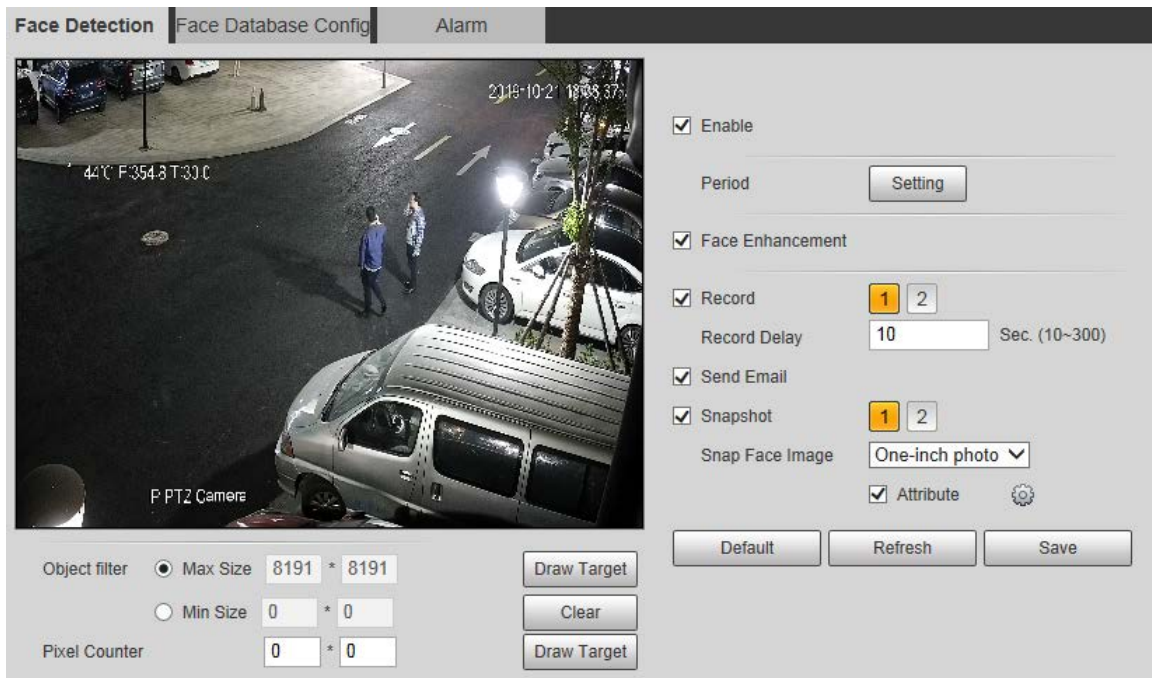Figure 5-104 Face detection interface






Step 2 Select **Enable**, and you can enable the face detection function.

Step 3 Configure parameters as needed.

Table 5-35 Face detection parameter description

| Parameter | Description |
|------------------|--|
| Period | Alarm event will be triggered only within the defined period. For details, see "5.5.1.1 Motion Detection". |
| Face Enhancement | Select Face Enhancement to preferably guarantee clear faces with low stream. |

| Parameter | Description |
|-----------------|--|
| Record | Select Record , and the system records video when alarms are triggered.  To enable video recording, you need to make sure that: <ul style="list-style-type: none"> • The motion detection recording is enabled. For details, see "5.6.1.1 Record". • The auto recording is enabled. For details, see "5.6.4 Record Control". |
| Record Delay | The video recording will not stop until the record delay time you set has passed. |
| Send Email | Select Send Email , and when alarms are triggered, the system sends email to the specified mailbox. For the email settings, see "5.2.5 SMTP (Email)". |
| Snapshot | Select Snapshot , and the system takes snapshot when alarms are triggered.  <ul style="list-style-type: none"> • Enable the motion detection snapshot first. For details, see "5.6.1.1 Record". • For searching and setting snapshot storage path, see "5.1.2.5 Path". |
| Snap Face Image | Set the snapshot scope, including Face and One-inch photo . |
| Attribute | Select the Attribute check box, click  , and then you can set the human attributes during face detection. |

Step 4 Click **Save**.

5.5.7.2 Face Database Config


After you successfully configure the face database, the detected faces can be compared with the information in the face database. Configuring a face database includes creating a face database, adding face pictures, and face modeling.

5.5.7.2.1 Adding Face Database

Create a face database, and then register face images, that is to add face pictures to the newly created face database.


Step 1 Select **Setting > Event > Face Recognition > Face Database Config**.

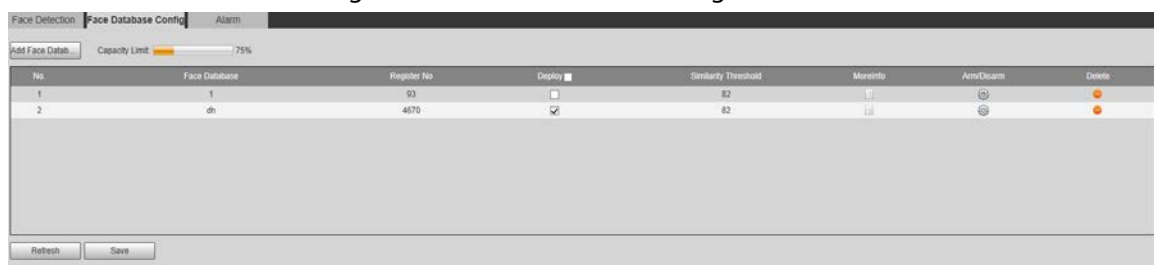Figure 5-105 Face database config



Step 2 Click **Add Face Database**.

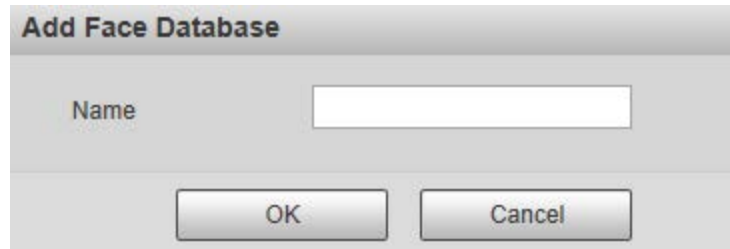
Figure 5-106 Add face database



Step 3 Set face database name.

Step 4 Click **OK** to complete the addition.

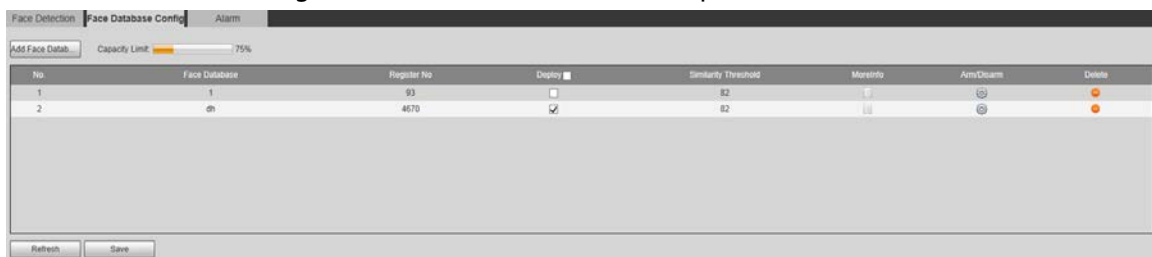Figure 5-107 Add face database completed



Step 5 Configure parameters as needed.

Table 5-36 Face database config parameter description

| Parameter | Description |
|----------------------|--|
| Deploy | Select Deploy and the face database takes effect. |
| Similarity Threshold | The comparison is successful only when the similarity between the detected face and the face feature in face database reaches the set similarity threshold. After this, the comparison result is displayed on the Live interface. |
| More Info | Click More Info to manage face database. You can set search conditions, register people, and modify people information. |
| Arm/Disarm | Alarm event will be triggered only within the defined time period. For details, see "5.5.1.1 Motion Detection". |
| Delete | Delete the selected face database. |

5.5.7.2.2 Adding Face Pictures

You can add face pictures to the created face database. Manual addition and batch import are supported.


Manual Addition

Add a single face picture. Use this method when registering a small number of face pictures.

Step 1 Select **Setting > Event > Face Recognition > Face Database Config**.

Step 2 Click **More Info** for the face database to be configured.

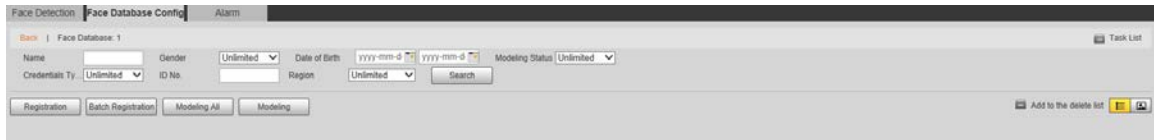
Figure 5-108 More info



Set filtering conditions as needed, and then click **Search**. The search result is displayed.

Step 3 Click **Registration**.

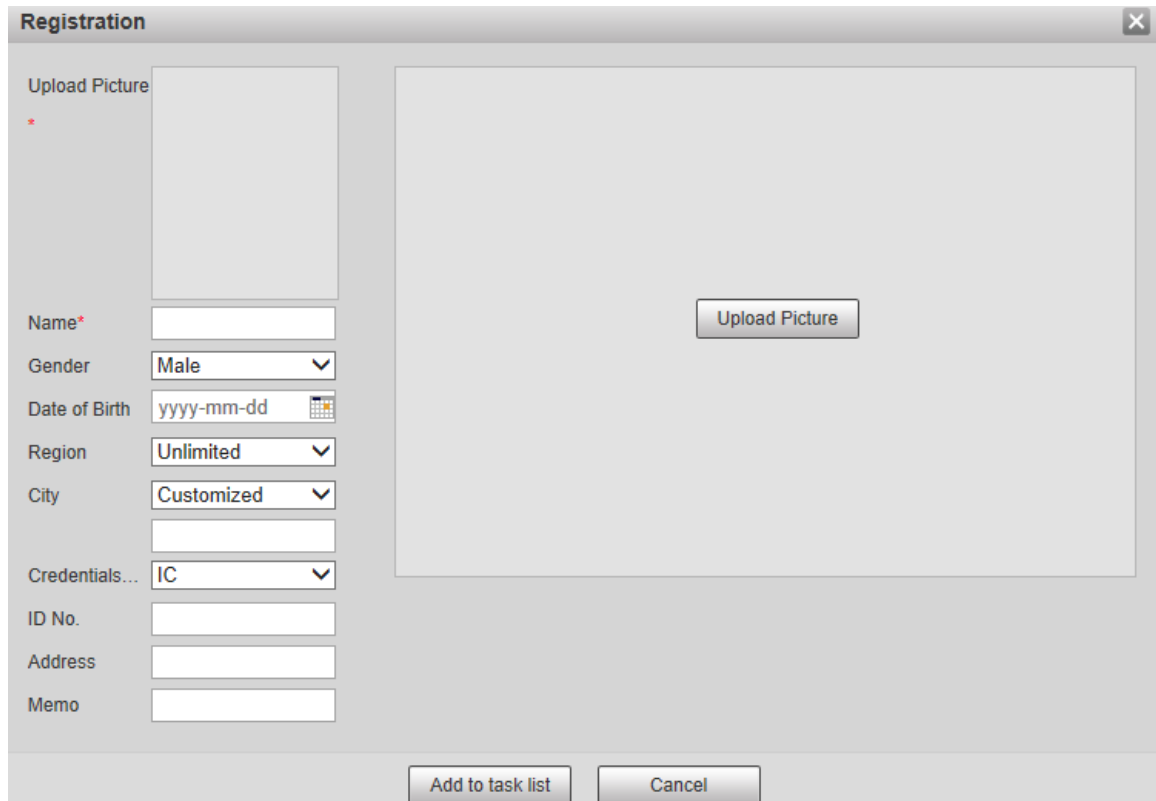Figure 5-109 Registration interface



Step 4 Click **Upload Picture**, and then import the face pictures to be uploaded.



You can manually select a face area. After uploading the picture, select a face area and click **OK**. If there are multiple faces in a picture, select the target face and click **OK** to save the face picture.

Figure 5-110 Addition completed




Step 5 Fill in face picture information as needed.

Step 6 Click **Add to task list**.

Step 7 Click **Task List 1**.

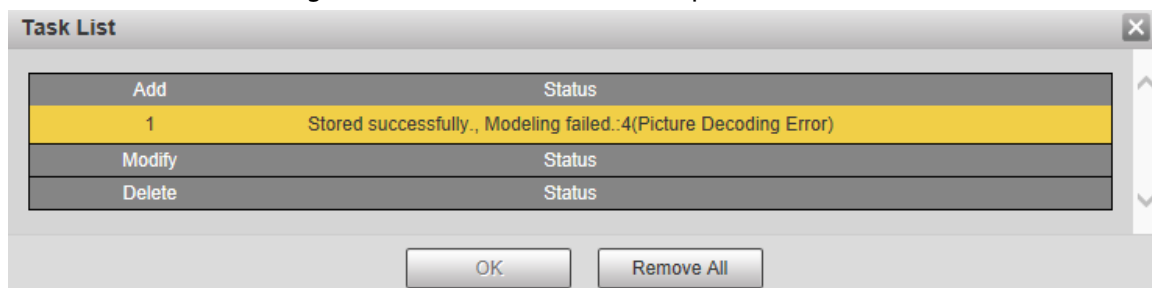Figure 5-111 Task list addition completed



Click **Remove All** to remove all the tasks.

Batch Registration

You can import multiple face pictures in batches. Use this method when registering a large number of face pictures.

Before importing pictures in batches, name the face pictures in the format of "Name#SGender#BDate of Birth#NRegion#TCredentials Type#MID No. jpg" (for example,

"John#S1#B1990-01-01#NCN#T1#M330501199001016222").



Name is required and the rest are optional.

Table 5-37 Naming rules for batch import

| Naming Rules | Description |
|------------------|---|
| Name | Enter the corresponding name. |
| Gender | Enter a number. 1: Male; 2: Female. |
| Date of Birth | Enter numbers in the format of yyyy-mm-dd. For example, 2017-11-23. |
| Region | Enter the region name. |
| Credentials Type | Enter a number. 1: ID card; 2: passport. |
| ID No. | Enter ID No. |

Step 1 Select **Setting > Event > Face Recognition > Face Database Config**.


The **Face Database Config** interface is displayed.

Step 2 Click **More Info** for the face database to be configured.

The **Face Database** interface is displayed.


Step 3 Click **Batch Registration**.

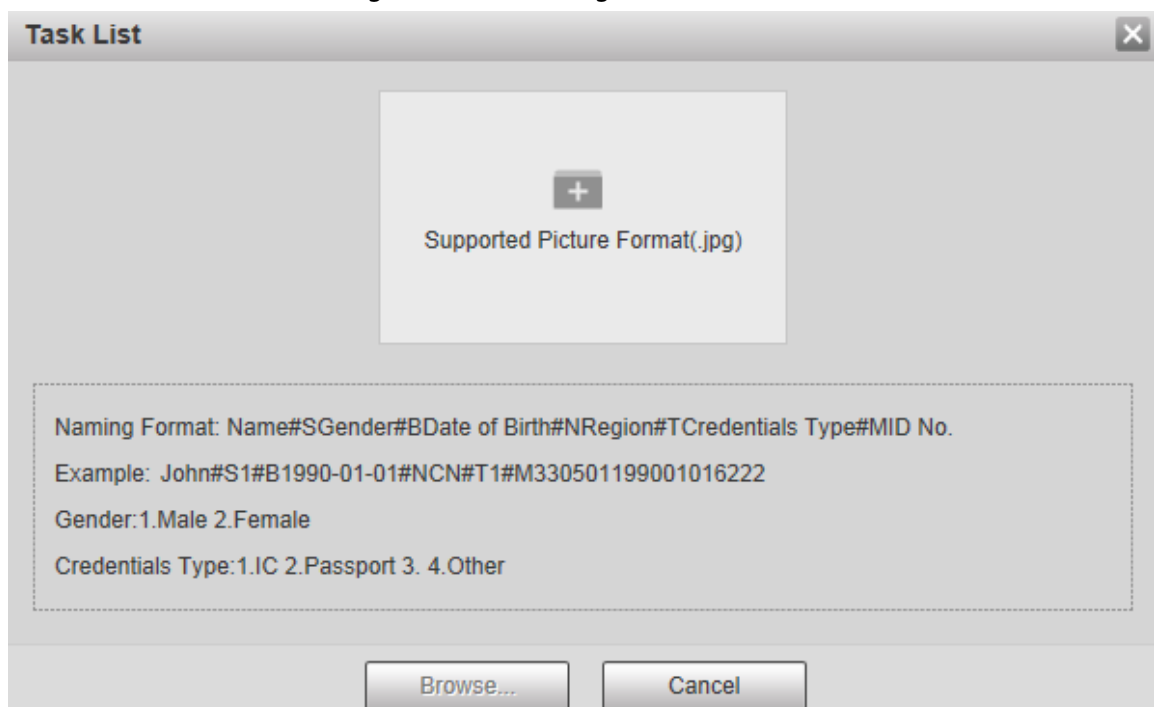Figure 5-112 Batch registration




Step 4 Click to select the file path.

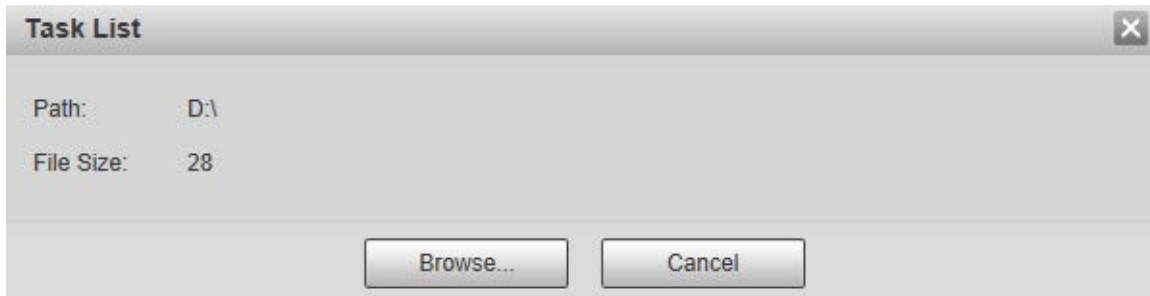Figure 5-113 Batch registration



Step 5 Click **Browse**.

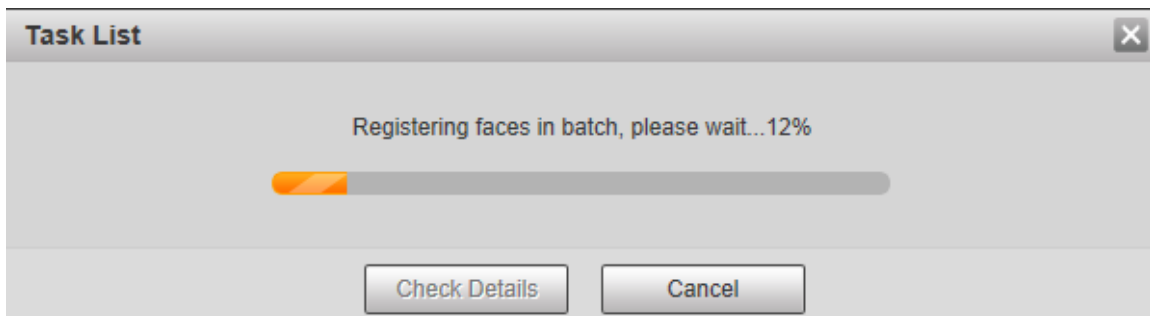Figure 5-114 Registering



Step 6 After the registration is completed, click **Next** to view the registration result.

5.5.7.2.3 Managing Face Pictures

You can add face pictures to face database; manage and maintain face pictures to ensure correct information.

Modifying Face Information



On the **Face Database Config** interface, move the mouse pointer to the face picture or person information line. Click  or , and the **Registration** interface is displayed. After modifying the face picture information as needed, click **Add to task list**.

Figure 5-115 Registration interface

Deleting Face Pictures

Enter face database, and then delete the created face picture.

- Single deletion: Move the mouse pointer to the face picture or people information line, and then click or to delete the face picture.
- Batch deletion: Move the mouse pointer to the face picture or people information line, and then click at the upper right corner of the face pictures, or click on person information line. After selecting multiple items, click **Add to the delete list**, click Task List 1, and then click **OK** to delete the selected face pictures.
- Delete all: When viewing face pictures in a list, click on people information line (or select **All** when viewing face pictures in pictures), click **Add to the delete list**, click Task List 1, and then click **OK** to delete all face pictures.

5.5.7.2.4 Face Modeling

You can extract and import the relevant information of face pictures into the database through face modeling, and create a face feature mode for smart detection such as face comparison.




- The more face pictures you choose, the longer the modeling time is. Wait patiently.
- During the modeling process, some smart detection functions (such as face comparison) are temporarily unavailable and can be resumed after the modeling is completed.

Step 1 Select **Setting > Event > Face Recognition > Face Database Config**.

Step 2 Click **More Info** for the face database to be configured.

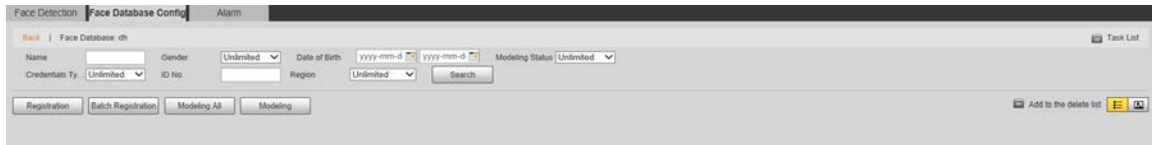Figure 5-116 Face database interface




Step 3 Select the face pictures for modeling as needed.



Click to view the face picture in a list. Click to view the face image as a thumbnail.

- Modeling All
Click **Modeling All**, and all face pictures in the face database will be modeled.
- Selective Modeling
If there are many face pictures in the face database, set filtering conditions and click **Search** to select face pictures for modeling.

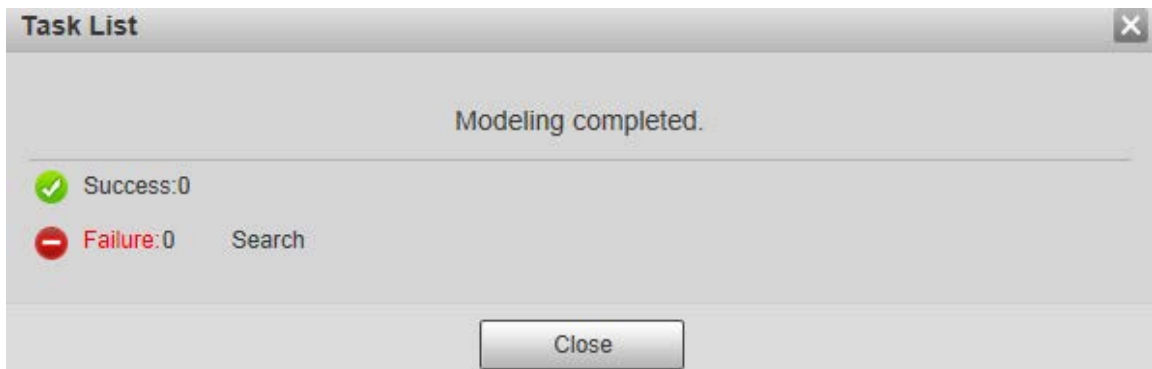Figure 5-117 Modeling completed




5.5.7.3 Alarm Linkage

Set the alarm linkage mode for face comparison.

Step 1 Select **Setting > Event > Face Recognition > Alarm**.

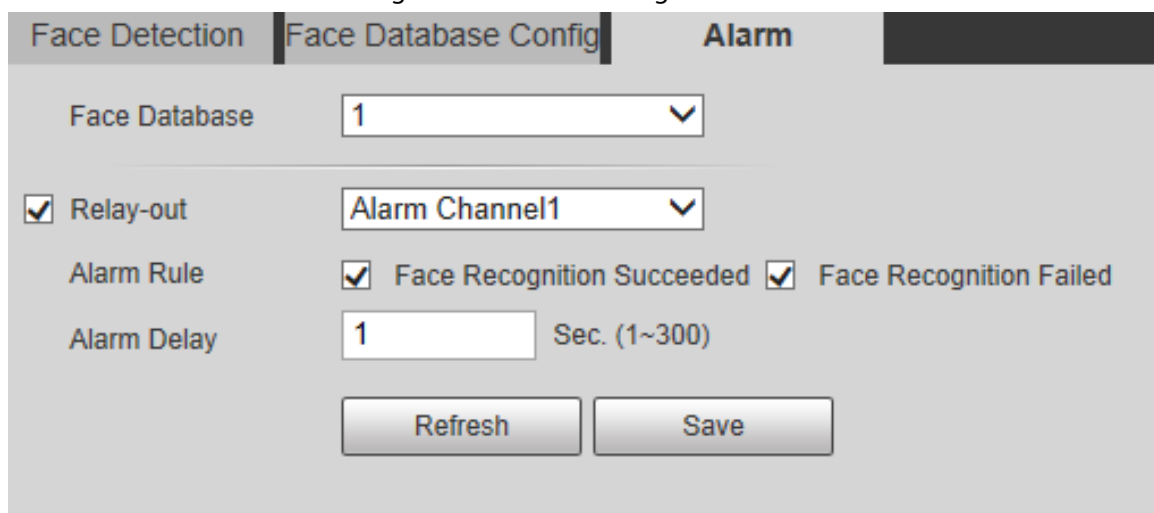Figure 5-118 Alarm linkage



Step 2 Configure parameters as needed.

Table 5-38 Alarm linkage parameter description

| Parameter | Description |
|---------------|--|
| Face Database | Select the face database to be configured with alarm linkage. |
| Alarm Rule | Select the alarm rule as needed. |
| Relay-out | Select the Relay-out check box, and when an alarm is triggered, the system interacts with the linked alarm devices. |
| Alarm Delay | The alarm will continue for an extended period of time. The value range is 1–300 s. |

Step 3 Click **Save**.

5.5.8 People Counting

You can use this function to count the number of people in the area and generate reports.




- Before using this function, you need to enable **People Counting** in **Smart Plan**.
- The people counting data will be overwritten if the disk is full. Back up the data in time as needed.
- This function is available on select models.

5.5.8.1 People Counting Settings

With the function, the system can count the number of people appearing in the monitoring screen within a certain period.

Step 1 Select **Setting** > **Event** > **People Counting** > **People Counting**.

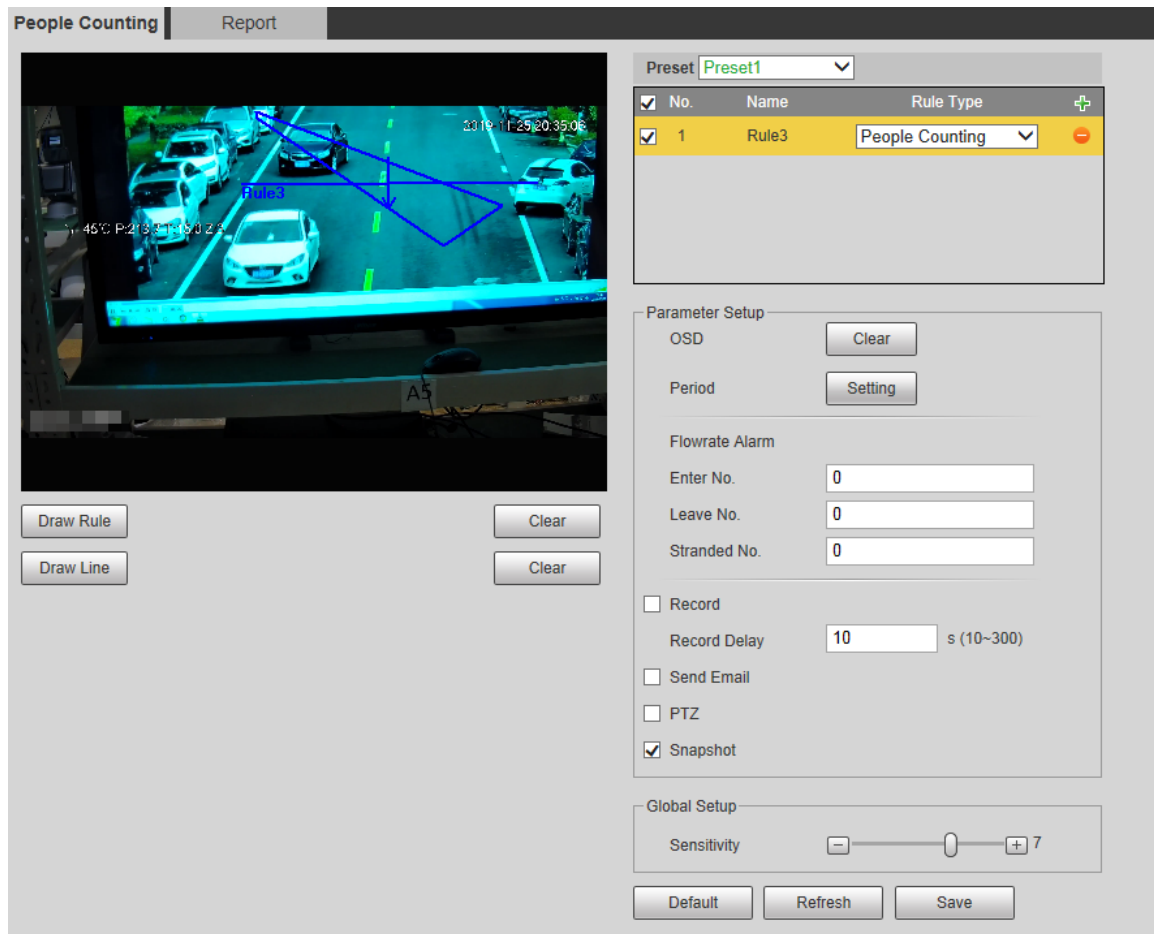Figure 5-119 People counting settings



Step 2 Select the presets to be configured.

Step 3 Click **Draw Rule**, and you can draw rules on the monitoring screen. For parameter description, see Table 5-28.



Click **Clear** to the right of **Draw Rule**, and you can clear all drawn rules.

Step 4 Configure parameters as needed.

Table 5-39 People counting parameter description

| Parameter | Description |
|--------------|--|
| OSD | Display the number of people displayed in the area in real time. Click Clear , and the current number will be zero. |
| Enter No. | Set the Enter No. , and when the number of people entering reaches the set value, an alarm will be triggered. |
| Leave No. | Set the Leave No. , and when the number of people leaving reaches the set value, an alarm will be triggered. |
| Stranded No. | Set the Stranded No. , and when the number of people staying reaches the set value, an alarm will be triggered. |



For other parameters, see "5.5.5.1 Tripwire".


Step 5 Click **Save**.

5.5.8.2 Report

You can view the statistics results of people in the scene during the selected period.

Step 1 Select **Setting > Event > People Counting > Report**.

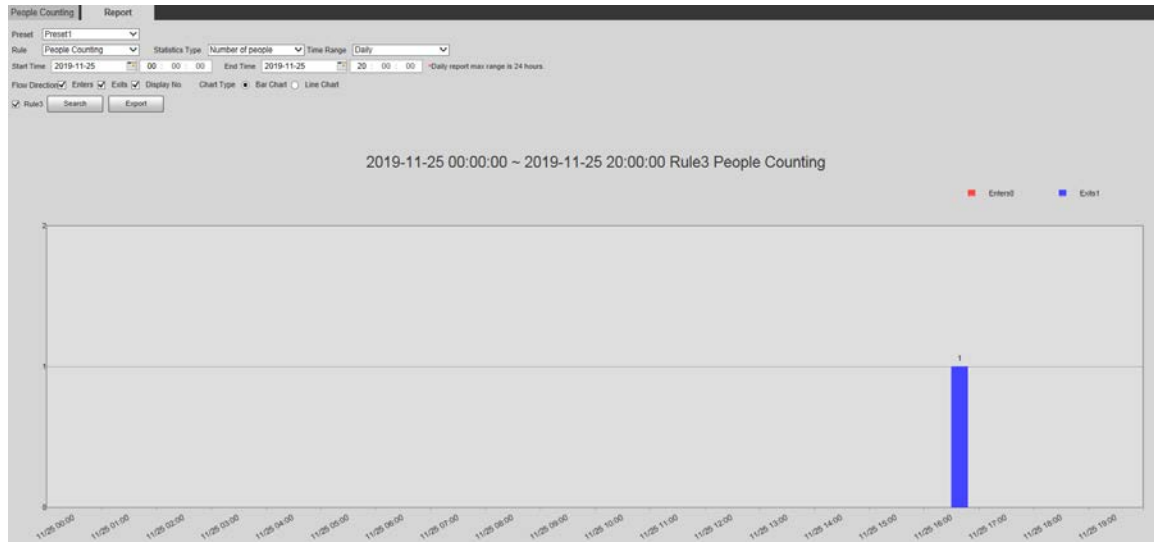Figure 5-120 People counting report



Step 2 Select a preset.

Step 3 Select the **Rule**, **Statistics Type**, and **Time Range**.

Step 4 Select the start time and end time for searching reports.

Step 5 Select **Flow Direction** and **Chart Type**.

Step 6 Click **Search** to generate reports, and click **Export** to export the report to local storage.

5.5.9 Heat Map




- Before enabling **Heat Map**, you need to set presets in **PTZ** section, and select the function in the **Smart Plan**.
- The data will be overwritten if the disk is full. Back up the data in time as needed.
- This function is available on select models.

5.5.9.1 Heat Map Settings

The function can be used to detect the activity level of moving objects in the scene during a certain period.

Step 1 Select **Setting > Event > Heat Map > Heat Map**.

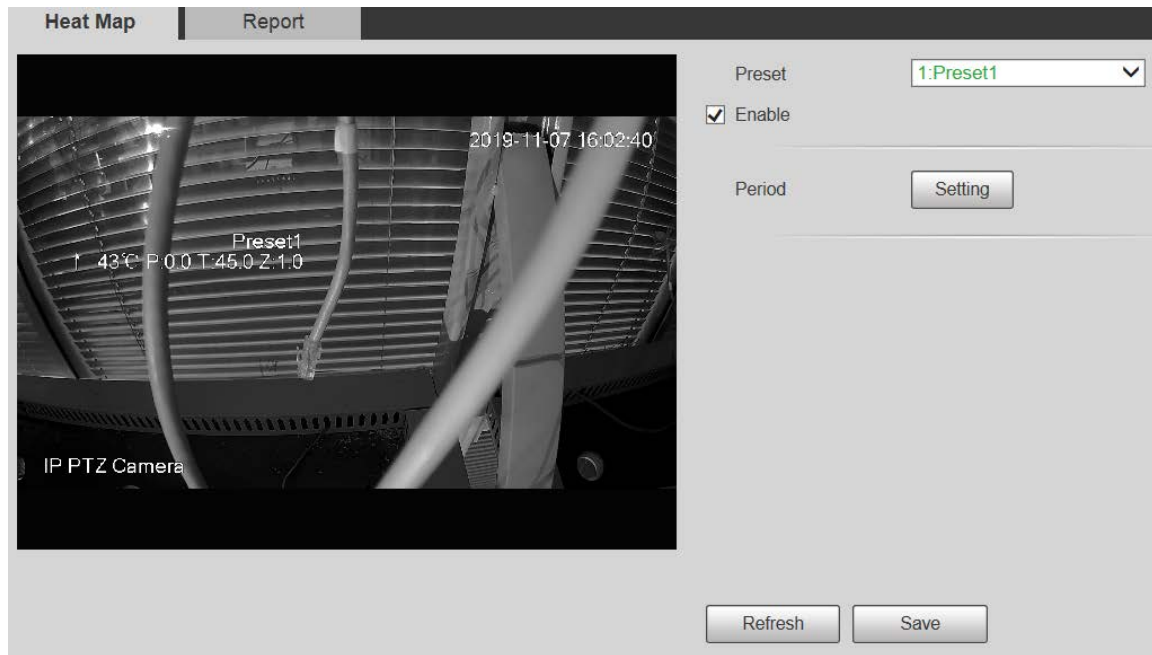Figure 5-121 Heat map



- Step 2 Select the presets to be configured.
- Step 3 Select the **Enable** check box, and then the heat map function is enabled.
- Step 4 Click **Setting** to set the arming period. For details, see "5.5.1.1 Motion Detection".
- Step 5 Click **Save**.

5.5.9.2 Report

You can view the heat map report for the scene in the selected period.

- Step 1 Select **Setting > Event > Heat Map > Report**.
The **Report** interface is displayed.
- Step 2 Set the start time and end time to search for the heat map report.
- Step 3 Select a preset.
- Step 4 Click **Search**, and the search results will be displayed on the interface.

Figure 5-122 Report



5.5.10 Video Metadata

With the function, the system can count the number of motor vehicles, non-motor vehicles and people in the monitoring screen, identify the features of the vehicles and people in the scene, and take snapshots.




- Before using video metadata, you need to enable the function in the **Smart Plan**.
- This function is available on select models.

5.5.10.1 Scene Setting

Set the parameters of snapshot, analysis and alarm in the scene.

Step 1 Select **Setting** > **Event** > **Video Metadata**.

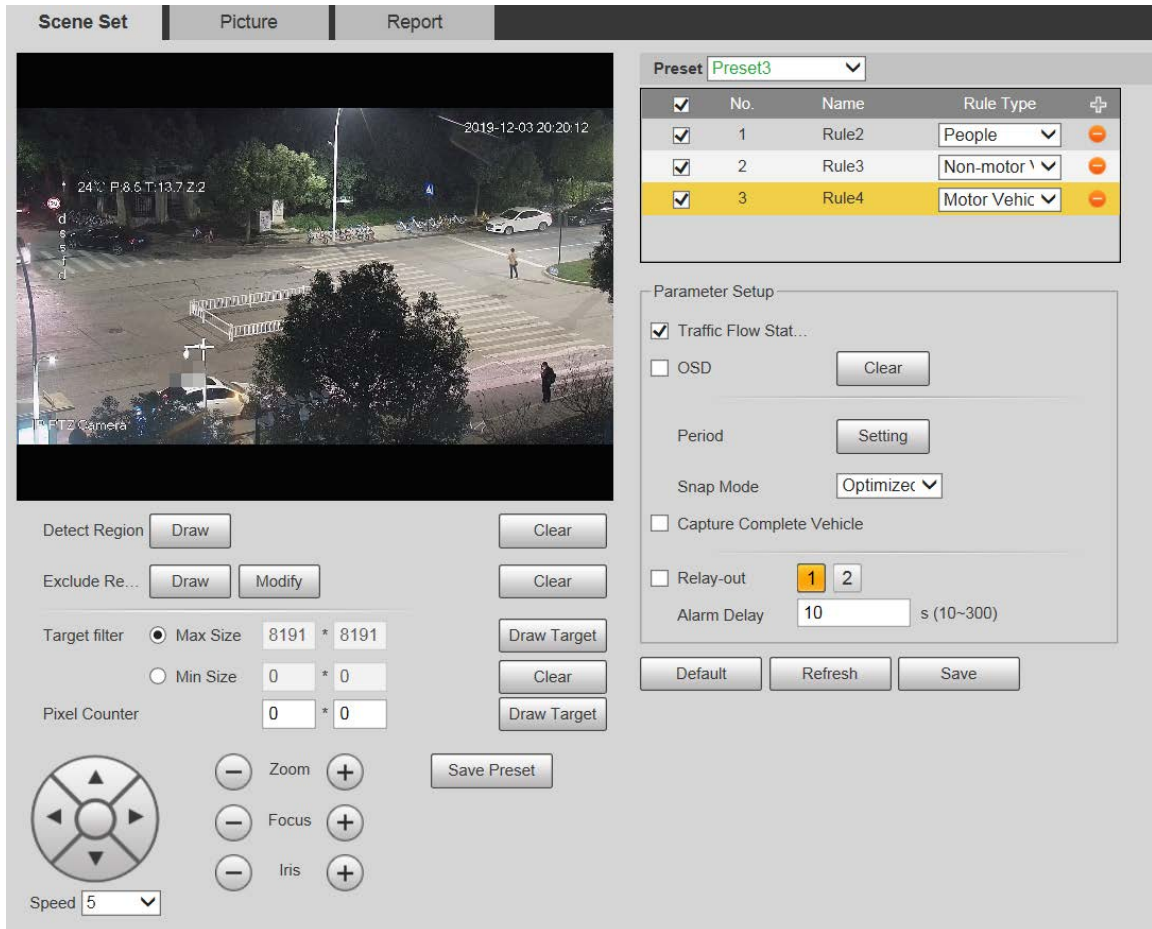
Figure 5-123 Scene setting



Step 2 Click the **Preset** list to select the preset to configure video metadata.

Step 3 Click  to add a rule type.

Step 4 Modify the parameters as needed.

- Double-click the name to modify the rule name.
- Select the rule type from **People**, **Non-motor Vehicle** and **Motor Vehicle**.
- Click the corresponding  to delete detection items.

Step 5 Configure parameters as needed.

Table 5-40 Scene setting parameter description

| Parameter | Description |
|-----------------------------------|---|
| People Flow Statistics | After selection, traffic flow statistics will be displayed on the screen. |
| Non-motor Vehicle Flow Statistics | |
| Traffic Flow Statistics | |
| OSD | Select the check box to enable the OSD overlay. The statistics will be displayed on the Live interface in the form of OSD information. |
| Clear | Click it to clear the statistics of motor vehicles, non-motor vehicles and people. |



For other parameters, see "5.5.5.1 Tripwire".

Step 6 Click **Save**.

5.5.10.2 Picture Overlay

Set the overlay information on the snapshot.

Step 1 Select **Setting > Event > Video Metadata > Overlay**.

The **Picture** interface is displayed.

Step 2 Select **Picture Overlay Type** from **People**, **Non-motor Vehicle** and **Motor Vehicle**.

Figure 5-124 Picture overlay–motor vehicle

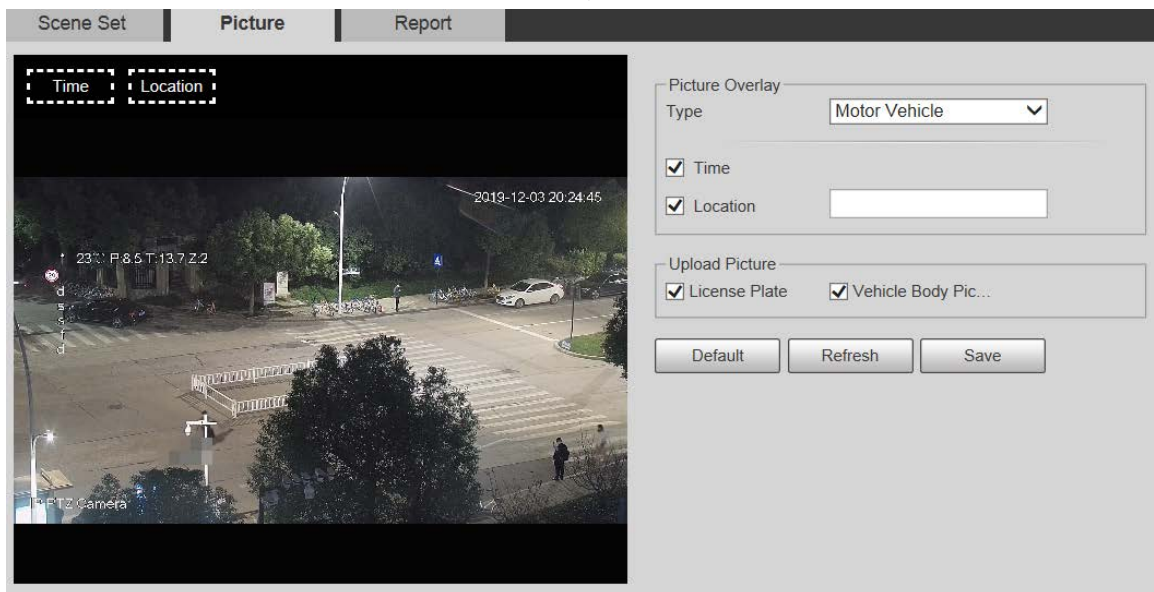


Figure 5-125 Picture overlay–non-motor vehicle


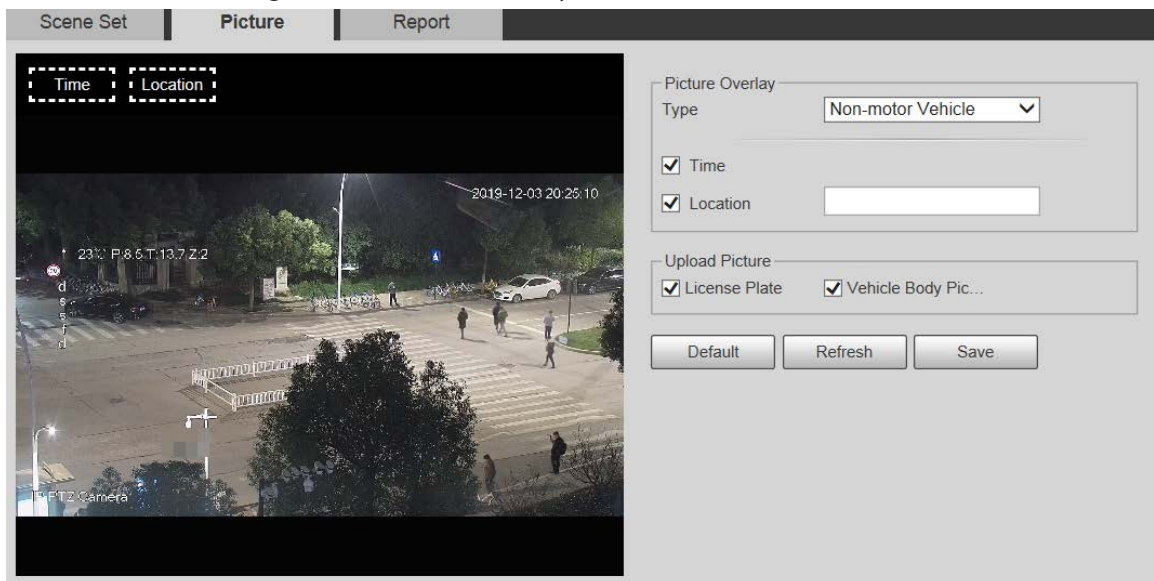


Figure 5-126 Picture overlay–people

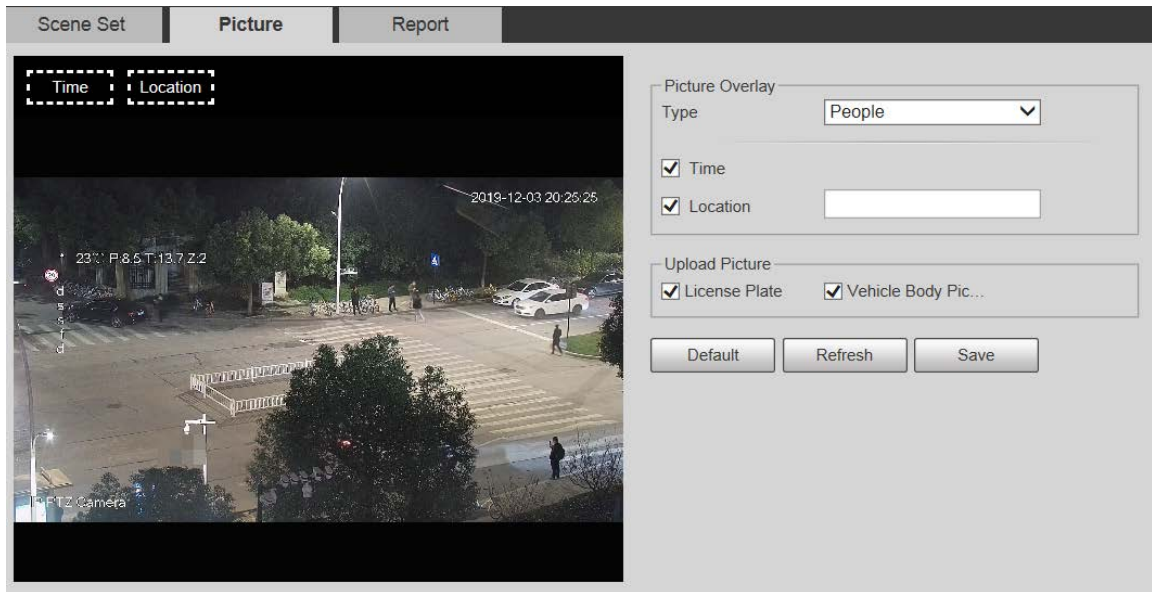

Step 3 Select overlay information as needed.



If you select **Location**, you need to manually enter the location of the Device.

Step 4 Click **Save**.

5.5.10.3 Report

You can view the number of vehicles, non-vehicles and people in the scene during the selected period.

Step 1 Select **Setting > Event > Video Metadata > Report**.

The **Report** interface is displayed.


Step 2 Select the **Report Type**.

Step 3 Select the start time and end time for searching reports.

Step 4 Select **Traffic Flow Statistics Type**.

Step 5 Click **Search** to generate reports.

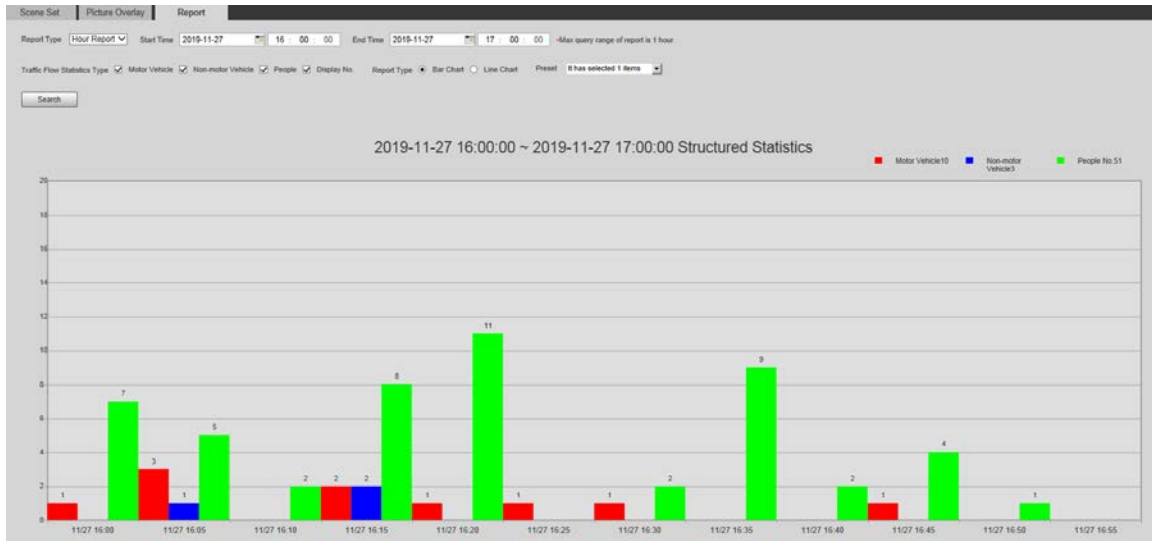Figure 5-127 Video metadata report



5.5.11 Alarm

Step 1 Select **Setting** > **Event** > **Alarm**.

Figure 5-128 Alarm

Alarm

Enable

Relay-in: Alarm1 ▼

Period: Setting

Anti-Dither: 0 s (0~100) Sensor Type: NO ▼

Record

Record Delay: 10 s (10~300)

Relay-out: 1 2

Alarm Delay: 10 s (10~300)

Send Email

PTZ

Snapshot

Default
Refresh
Save

Step 2 Configure parameters as needed.

Table 5-41 Alarm setting parameter description

| Parameter | Description |
|-------------|--|
| Enable | Select the Enable check box, and then the alarm linkage is enabled. |
| Relay-in | Select alarm input, and 7 alarm inputs are available. |
| Sensor Type | There are two types: NO (normally open) and NC (normally closed). Switch from NO to NC , and alarm event will be enabled. Switch from NC to NO , and alarm event will be disabled. |



For other parameters, see "5.5.1.1 Motion Detection".

Step 3 Click **Save**.

5.5.12 Abnormality

Abnormality includes 7 alarm events: **No SD Card**, **Capacity Warning**, **SD Card Error**, **Disconnection**, **IP Conflict**, **Illegal Access**, and **Security Exception**.

5.5.12.1 SD Card

In case of an SD card exception, an alarm will be triggered.

Step 1 Select **Setting > Event > Abnormality > SD Card**.

Figure 5-129 No SD card

The screenshot shows the 'SD Card' configuration page with the 'No SD Card' event type selected. The 'Enable' checkbox is unchecked, 'Relay-out' is checked, and the 'Alarm Delay' is set to 10 seconds. The 'Send Email' checkbox is unchecked. At the bottom, there are 'Default', 'Refresh', and 'Save' buttons.

| SD Card | Network | Illegal Access | Security Exception |
|---|---------------|----------------|--------------------|
| Event Type | No SD Card | | |
| <input type="checkbox"/> Enable | | | |
| <input checked="" type="checkbox"/> Relay-out | 1 | 2 | |
| Alarm Delay | 10 s (10~300) | | |
| <input type="checkbox"/> Send Email | | | |
| Default Refresh Save | | | |

Figure 5-130 SD card error

The screenshot shows the 'SD Card' configuration page with the 'SD Card Error' event type selected. The 'Enable' checkbox is unchecked, 'Relay-out' is checked, and the 'Alarm Delay' is set to 10 seconds. The 'Send Email' checkbox is unchecked. At the bottom, there are 'Default', 'Refresh', and 'Save' buttons.

| SD Card | Network | Illegal Access | Security Exception |
|---|---------------|----------------|--------------------|
| Event Type | SD Card Error | | |
| <input type="checkbox"/> Enable | | | |
| <input checked="" type="checkbox"/> Relay-out | 1 | 2 | |
| Alarm Delay | 10 s (10~300) | | |
| <input type="checkbox"/> Send Email | | | |
| Default Refresh Save | | | |

Figure 5-131 Capacity warning

The screenshot shows the 'SD Card' configuration page with the 'Capacity Warning' event type selected. The 'Enable' checkbox is unchecked, 'Relay-out' is checked, and the 'Alarm Delay' is set to 10 seconds. The 'Capacity Limit' is set to 10%. The 'Send Email' checkbox is unchecked. At the bottom, there are 'Default', 'Refresh', and 'Save' buttons.

| SD Card | Network | Illegal Access | Security Exception |
|---|------------------|----------------|--------------------|
| Event Type | Capacity Warning | | |
| <input type="checkbox"/> Enable | | | |
| Capacity Limit | 10 % (0~99) | | |
| <input checked="" type="checkbox"/> Relay-out | 1 | 2 | |
| Alarm Delay | 10 s (10~300) | | |
| <input type="checkbox"/> Send Email | | | |
| Default Refresh Save | | | |

Step 2 Configure parameters as needed.

Table 5-42 SD card exception parameter description

| Parameter | Description |
|----------------|---|
| Enable | Select the check box to enable this function. |
| Capacity Limit | Configure the free space percentage, and if the free space in the SD card is less than the defined percentage, an alarm is triggered. |



For other parameters, see "5.4.1.1 Motion Detection."

Step 3 Click **Save**.

5.5.12.2 Network Exception

In case of a network exception, an alarm will be triggered.

Step 1 Select **Setting > Event > Abnormality > Network**.

Figure 5-132 Disconnection

| SD Card | Network | Illegal Access | Security Exception |
|---|---------|----------------|--------------------|
| Event Type: Disconnection | | | |
| <input checked="" type="checkbox"/> Enable | | | |
| <input type="checkbox"/> Record | | | |
| Record Delay: 10 s (10~300) | | | |
| <input type="checkbox"/> Relay-out: 1 2 | | | |
| Alarm Delay: 10 s (10~300) | | | |
| <input type="button" value="Default"/> <input type="button" value="Refresh"/> <input type="button" value="Save"/> | | | |

Figure 5-133 IP conflict

| SD Card | Network | Illegal Access | Security Exception |
|---|---------|----------------|--------------------|
| Event Type: IP Conflict | | | |
| <input checked="" type="checkbox"/> Enable | | | |
| <input type="checkbox"/> Record | | | |
| Record Delay: 10 s (10~300) | | | |
| <input type="checkbox"/> Relay-out: 1 2 | | | |
| Alarm Delay: 10 s (10~300) | | | |
| <input type="button" value="Default"/> <input type="button" value="Refresh"/> <input type="button" value="Save"/> | | | |

Step 2 Configure parameters as needed.

Table 5-43 Network exception parameter description

| Parameter | Description |
|-----------|---|
| Enable | Select the check box to enable this function. |



For other parameters, see "5.5.1.1 Motion Detection".

Step 3 Click **Save**.

5.5.12.3 Illegal Access

Illegal access alarm is triggered when the login password has been wrongly entered for more than the times you set.

Step 1 Select **Setting > Event > Abnormality > Illegal Access**.

Figure 5-134 Illegal access

Step 2 Configure parameters as needed.

Table 5-44 Illegal access parameter description

| Parameter | Description |
|-------------|--|
| Enable | Select the check box to set the illegal access alarm. |
| Login Error | After entering a wrong password for the set times, the alarm for illegal access will be triggered, and the account will be locked. |



For other parameters, see "5.5.1.1 Motion Detection".

Step 3 Click **Save**.

5.5.12.4 Security Exception

When an event affecting the Device safety occurs, an alarm for safety exception will be triggered.

Step 1 Select **Setting > Event > Abnormality > Security Exception**.

Figure 5-135 Security exception




- Step 2** Configure each parameter as needed.
For details, refer to "5.5.1.1 Motion Detection".
- Step 3** Click **Save**.

5.5.12.5 Battery Exception

When overtemperature of the battery is detected, alarm linkage actions are performed.

- Step 1** Select **Setting > Event > Abnormality > Battery Exception**.

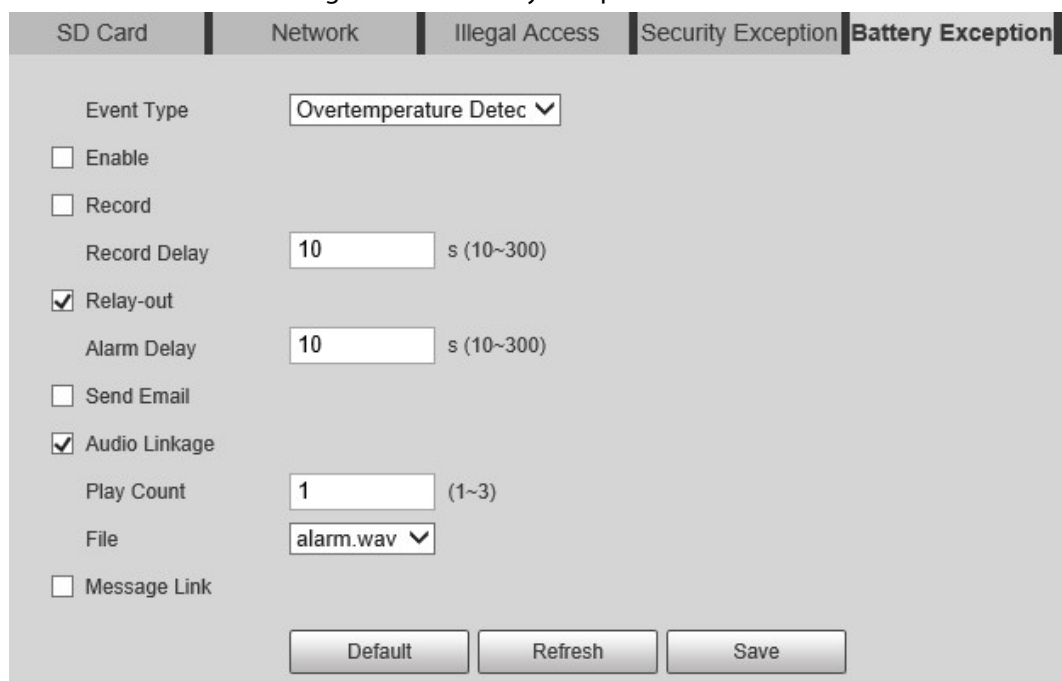Figure 5-136 Battery exception



- Step 2** Select the **Enable** check box to enable battery exception detection.
- Step 3** Set alarm linkage actions.
- Step 4** Click **Save**.

5.6 Storage

5.6.1 Schedule

Before setting the schedule, make sure that the **Record Mode** is **Auto** in **Record Control**.




If the **Record Mode** is **Off**, the Device will not record or take snapshots according to the schedule.

5.6.1.1 Record

Step 1 Select **Setting** > **Storage** > **Schedule** > **Record**.

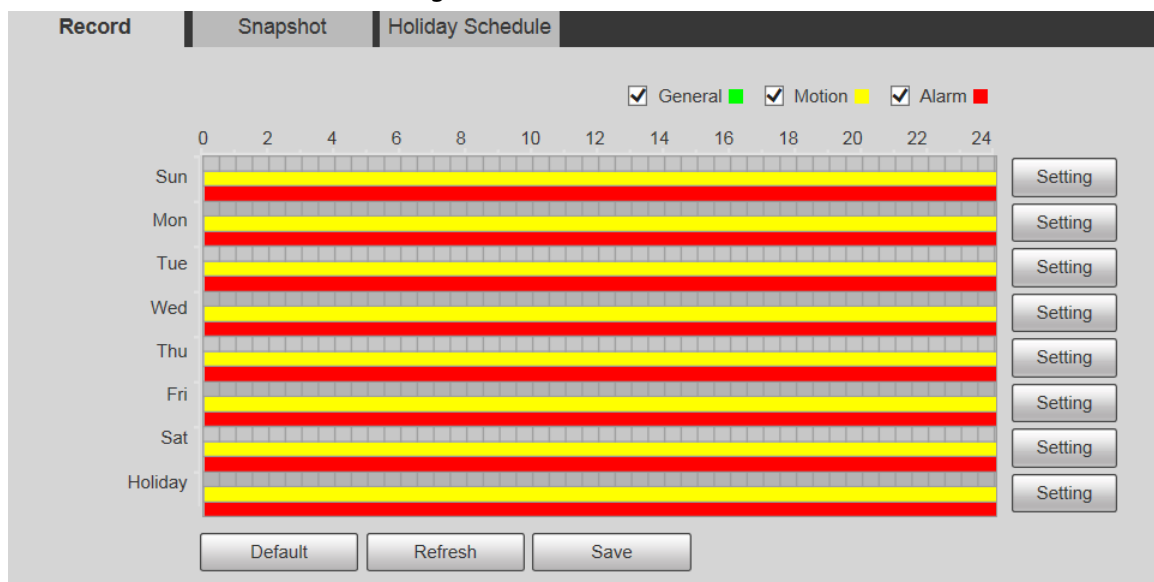Figure 5-137 Record




Step 2 Select the day for recording from Monday to Sunday. Click **Setting** on the right, and the **Setting** interface is displayed.

- Set the recording period as needed. You can set up to six periods for one day.
- You can select 3 types of recording: **General**, **Motion** and **Alarm**.



To set the time period, you can also press and hold the left mouse button and drag directly on the **Record** interface.

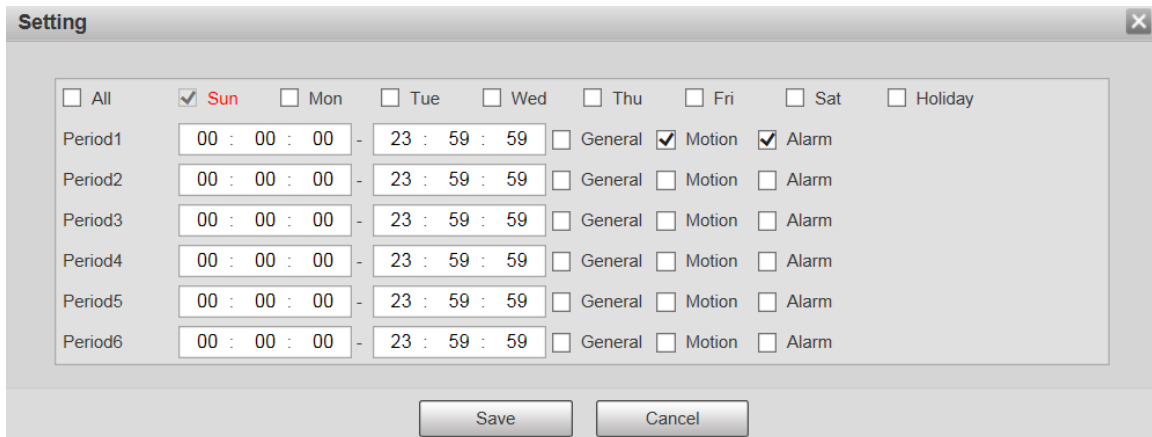Figure 5-138 Record schedule setting



Step 3 Click **Save** to return to the **Record** interface.

At this time, the colored chart visually displays the defined period.




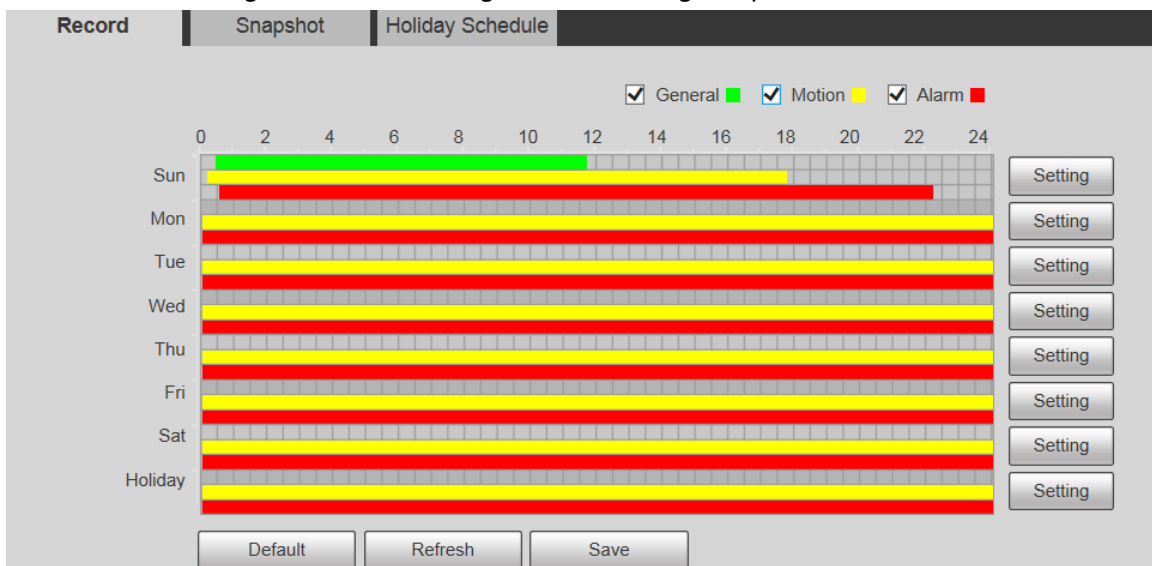
-  : Represents general recording.
-  : Represents motion detection recording.
-  : Represents alarm recording.

Figure 5-139 Recording schedule setting completed




Step 4 On the **Record** interface, click **Save**, and the **Save Succeeded!** prompt will be displayed, which means the recording schedule has been set.

5.6.1.2 Snapshot

Step 1 Select **Setting > Storage > Schedule > Snapshot**.

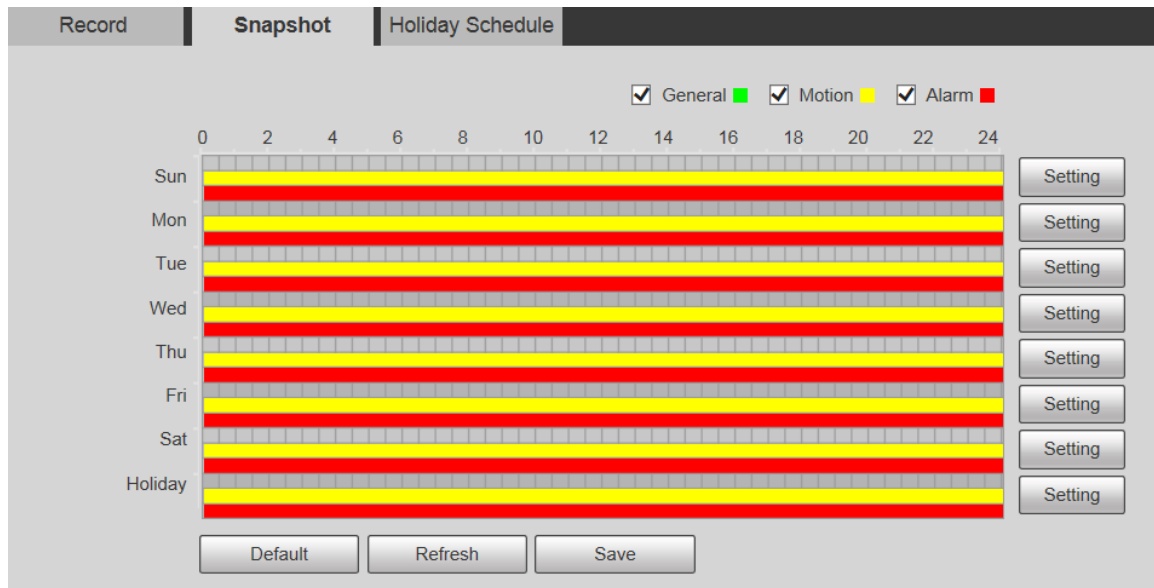Figure 5-140 Snapshot



Step 2 Set snapshot schedule.

For details, refer to [Step2](#) and [Step3](#) in "5.6.1.1 Record".

Step 3 Click **Save**, and the **Save Succeeded!** prompt will be displayed, which means the snapshot schedule has been set.

5.6.1.3 Holiday Schedule

You can set specific dates as holidays.

Step 1 Select **Setting > Storage > Schedule > Holiday Schedule**.

Figure 5-141 Holiday schedule

The screenshot shows a web interface for setting a holiday schedule. At the top, there are three tabs: "Record", "Snapshot", and "Holiday Schedule". Below the tabs, there are two checkboxes: "Record" and "Snapshot". A calendar for the month of "Dec" is displayed, with the date "1" highlighted in yellow. Below the calendar, there are two buttons: "Refresh" and "Save".

Step 2 Select a date.

The selected date will be a holiday and displayed in yellow.

Step 3 Select **Record** or **Snapshot**, and then click **Save**.

The **Save Succeeded!** prompt will be displayed.

Step 4 On the **Record** or **Snapshot** interface, click **Setting** to the right of **Holiday**.



The setting method is the same as that of Monday to Sunday.

Step 5 Set the period of one day for the **Holiday**, and the recording or snapshot will be taken according to the holiday time period.

5.6.2 Snapshot by Location


The system can take snapshots when the Device rotates to certain presets.



You need to set presets in advance.

Step 1 Select **Setting** > **Storage** > **Snapshot by Location**.

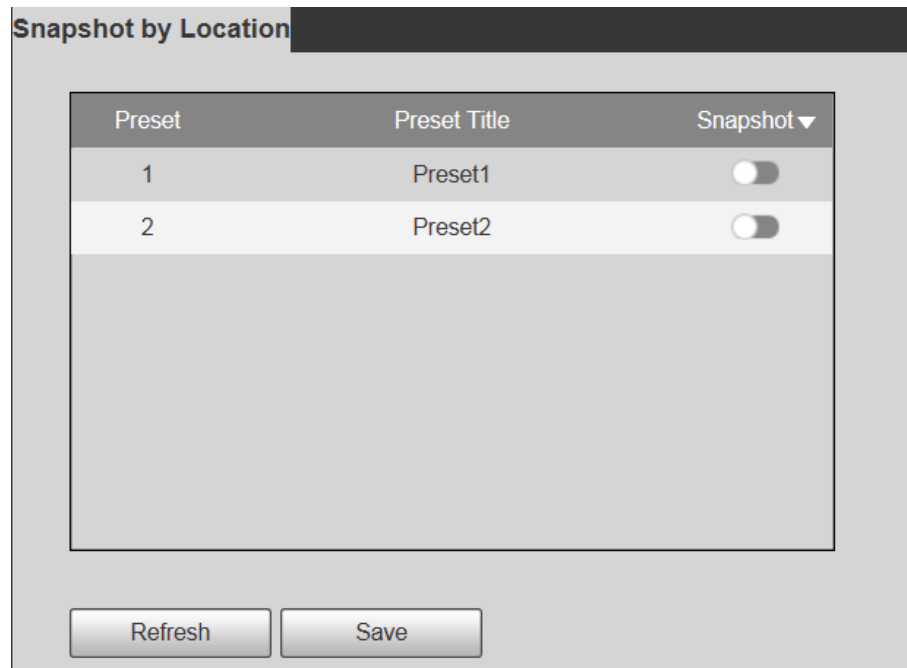Figure 5-142 Snapshot by location



Step 2 Select presets.

- Enable snapshot by location.
 - ◇ Click to enable the function for the corresponding preset.
 - ◇ Click **Snapshot** ▼, and then select **All Enabled** to enable the function for all presets.
- Disable snapshot by location.
 - ◇ Click to disable the function for the corresponding preset.
 - ◇ Click **Snapshot** ▼, and then select **All Disabled** to disable the function for all presets.

Step 3 Click **Save**.

5.6.3 Destination

5.6.3.1 Path

Configure the storage path of recordings and snapshots of the Device, and select local SD card, FTP and NAS for storage. Store recordings and snapshots according to the event type, respectively corresponding to **General**, **Motion** and **Alarm** in the schedule, and then select the corresponding type of recordings or snapshots for storage.

Step 1 Select **Setting** > **Storage** > **Destination** > **Path**.

Figure 5-143 Path settings

| Record | | | | Snapshot | | | |
|------------|-------------------------------------|-------------------------------------|-------------------------------------|------------|-------------------------------------|-------------------------------------|-------------------------------------|
| Event Type | Scheduled | Motion Detection | Alarm | Event Type | Scheduled | Motion Detection | Alarm |
| Local | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | Local | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| FTP | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | FTP | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| NAS | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | NAS | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |

Step 2 Select the corresponding event type and storage method as needed.

Table 5-45 Path parameter description

| Parameter | Description |
|------------|---|
| Event Type | Select Scheduled , Motion Detection or Alarm . |
| Local | Save recordings or snapshots to the SD card. |
| FTP | Save recordings or snapshots to the FTP server. |
| NAS | Save recordings or snapshots to the NAS server. |

Step 3 Click **Save**.

5.6.3.2 FTP

FTP function can be enabled only when it is selected as a destination path. When the network is disconnected or does not work, you can save recordings and snapshots to the SD card by using **Emergency (Local)** function.

Step 1 Select **Setting > Storage > Destination > FTP**.

Figure 5-144 FTP settings

Step 2 Select the **Enable** check box, and the FTP function is enabled.



- There might be risks if the FTP function is enabled. Think twice before enabling the function.
- **SFTP** is recommended to ensure network security.

Step 3 Configure parameters as needed.

Table 5-46 FTP parameter description

| Parameter | Description |
|-------------------|---|
| Server Address | The IP address of the FTP server. |
| Port | The port number of the FTP server. |
| Username | The username to log in to the FTP server. |
| Password | The password to log in to the FTP server. |
| Remote Directory | The destination path on the FTP server. |
| Emergency (Local) | If you enable the function, in case of FTP storage exception, the recordings and snapshots will be stored on the local SD card. |

Step 4 Click **test** to verify the username and password, and test whether FTP is connected to the Device.

Step 5 Click **Save**.

5.6.3.3 Local

SD card information is displayed in the local storage list. You can set it as read only or read & write. You can also hot swap or refresh it.




Dual SD cards are supported by some devices. For such devices, the SD card first inserted is called Local Disk 1, and the SD card inserted later is called Local Disk 2.

- If no recordings in both cards, the recording will be saved to Local Disk 1, and then saved to Local Disk 2 when Disk 1 is full.
- If there are recordings in both cards, the recording will be saved to the card with the latest recordings, and then saved to the other card when this card is full.

Step 1 Select **Setting > Storage > Destination > Local**.

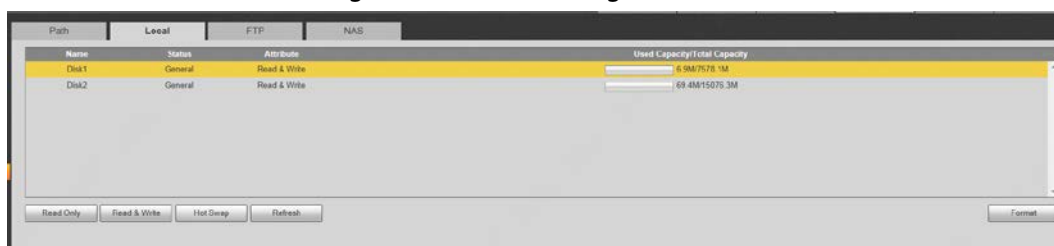Figure 5-145 Local storage



Step 2 Select the SD card to be set, and then perform the following operations as needed.

- Click **Read Only** to set the SD card to be read only.
- Click **Read & Write** to set the SD card to be read and write.
- Click **Hot Swap** to remove or insert the SD card when the Camera is running.
- Click **Format** to format the SD card.



After formatting the SD card, all data on it will be cleared. Be cautious.

5.6.3.4 NAS


This function can be enabled only when NAS is selected as a destination path. Select NAS to store files on the NAS server.

Step 1 Select **Setting > Storage > Destination > NAS**.

Figure 5-146 NAS settings

Step 2 Configure parameters as needed.

Table 5-47 NAS parameter description

| Parameter | Description |
|------------------|---|
| Enable | Select the check box to enable NAS function. Select NFS or SMB function.  There might be risks if NFS or SMB is enabled. Think twice before enabling the function. |
| Server Address | The IP address of the NAS server. |
| Remote Directory | The destination path on the NAS server. |

Step 3 Click **Save**.

5.6.4 Record Control

Step 1 Select **Setting > Storage > Record Control**.

Figure 5-147 Record control

Record Control

Pack Duration Min. (1~120)

Pre-event Record s (0~5)



Disk Full ▼

Record Mode Auto Manual Off

Record Stream ▼

Step 2 Configure parameters as needed.

Table 5-48 Record control parameter description

| Parameter | Description |
|------------------|---|
| Pack Duration | Set the pack duration of each recording file. It is 30 minutes by default. |
| Pre-event Record | <p>Set the pre-recording time. For example, if you enter 5, when an alarm is triggered, the system reads the recording of the first 5 seconds in memory, and then records it into a file.</p>  <p>If alarm recording or motion detection recording occurs, if there is no recording before, the video data within N seconds before the recording is started will also be recorded into the video file.</p> |
| Disk Full | <p>You can select Stop or Overwrite.</p> <ul style="list-style-type: none"> • Stop: The system stops recording when the disk is full. • Overwrite: The system overwrites the oldest files and keeps recording when the disk is full.  <p>The data will be overwritten if the disk is full. Back up the file in time as needed.</p> |
| Record Mode | You can select Auto , Manual or Off . Select Manual mode to start recording immediately, and select Auto mode to record within the schedule. |
| Record Stream | Select Main Stream or Sub Stream . |

Step 3 Click **Save**.

5.7 System Management

5.7.1 Device Settings

5.7.1.1 General


Step 1 Select **Setting > System > General > General**.

Figure 5-148 General settings

The screenshot shows a web interface for 'General' settings. At the top, there are two tabs: 'General' (active) and 'Date&Time'. Below the tabs, there are three input fields: 'Name' with the value '5C07BA7YAJ51BEB', 'Language' with a dropdown menu showing 'English', and 'Video Standard' with a dropdown menu showing 'PAL'. At the bottom of the form, there are three buttons: 'Default', 'Refresh', and 'Save'.

Step 2 Configure parameters as needed.

Table 5-49 General setting parameter description

| Parameter | Description |
|----------------|--|
| Name | Set the device name.  Different devices have different names. |
| Language | Select the language to be displayed. |
| Video Standard | Select video standard from PAL and NTSC . |

Step 3 Click **Save**.


5.7.1.2 Date & Time

Step 1 Select **Setting > System > General > Date&Time**.

Figure 5-149 Date & time

Step 2 Configure parameters as needed.

Table 5-50 Date & time parameter description

| Parameter | Description |
|--------------|---|
| Date Format | Select the date format. Three formats are available: YYYY-MM-DD , MM-DD-YYYY and DD-MM-YYYY . |
| Time Format | Select the time format. Two formats are available: 24-Hour and 12-Hour . |
| Time Zone | Set the local time zone. |
| Current Time | The current time of the Device. |
| DST | Set the Start Time and End Time of DST in the Date format or Week format. |
| NTP | Select the NTP check box to enable the network time sync function. |
| Server | Set the address of the time server.  Set the network timing function of NTP server, and the Device time will be synchronized with the server time. |
| Port | Set the port number of the time server. |
| Interval | Set the synchronization interval of the Device and the time server. |

Step 3 Click **Save**.

5.7.1.3 Screen Off Settings




The function is available on select models.

You can set the screen-off time of the device display.

Step 1 Select **Setting** > **System** > **General** > **Screen Off Settings**.

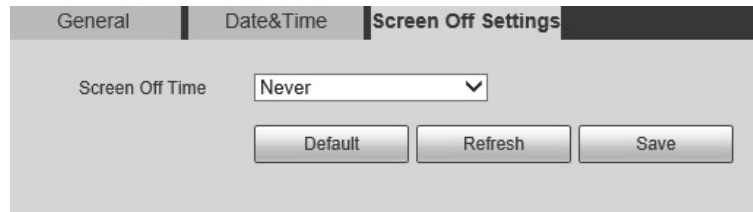Figure 5-150 Screen off settings



Step 2 Set screen-off time.

- **Never:** The screen is never turned off.
- **Custom:** Customize the screen-off time.

Step 3 Click **Save**.

5.7.2 Account Settings

5.7.2.1 Account


User management is only available for admin users.

- For **Username** and **Group Name**, the maximum length is 15 characters. Username can only consist of numbers, letters, underlines, dots and @; group name can only consist of numbers, letters and underlines.
- The password should consist of 8 to 32 non-blank characters and contain at least two types of characters among upper case, lower case, number, and special characters (excluding ' " ; : &). The confirming password shall be the same as the new password. Set a high security password according to the prompt of password strength.
- The number of users and groups is 19 and 8 respectively by default.
- User management adopts a two-level method of group and user. Neither group names nor user names can be duplicated, and a user can only belong to one group.
- Users currently logged in cannot modify their own permissions.
- The user is admin by default. The **admin** account is defined as high privileged user.

5.7.2.1.1 Username

Select **Setting** > **System** > **Account** > **Account** > **Username**, and you can enable anonymous login, add users, delete users, modify user passwords, and perform other operations.

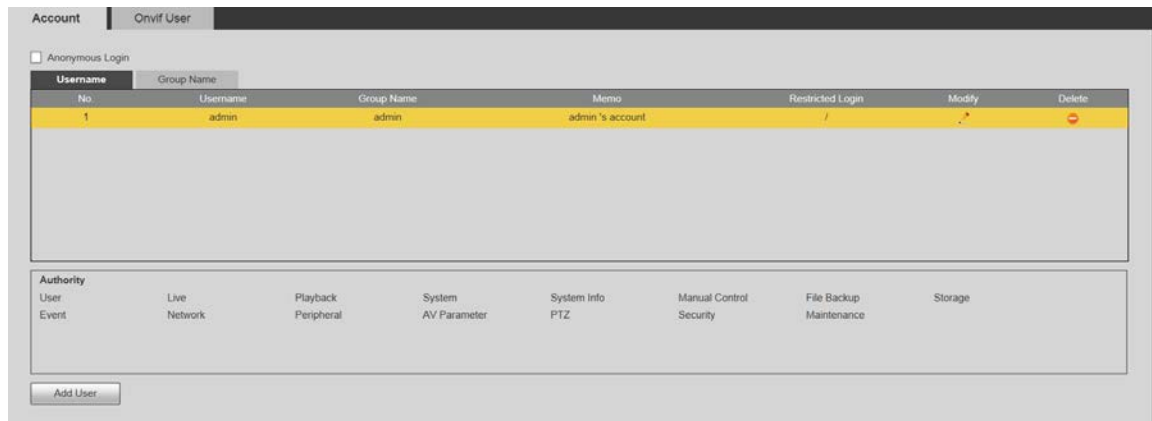Figure 5-151 Account interface



No permission is available for version information and other buttons except **Relay-out**, **Mark**, and **Wiper Control** on the **Live** interface for the time being.

Anonymous Login

Select the **Anonymous Login** check box, and you can log in to the Device anonymously without username and password after entering IP. Anonymous users only have preview permission in the permission list. In the anonymous login, click **Logout** to log in to the Device by using other usernames.



After **Anonymous Login** is enabled, the user can view audio and video data without authentication. Think twice before enabling the function.

Adding Users


Add users in the group and set permissions.



As the default user with the highest authority, admin cannot be deleted.

Step 1 Click **Add User**.

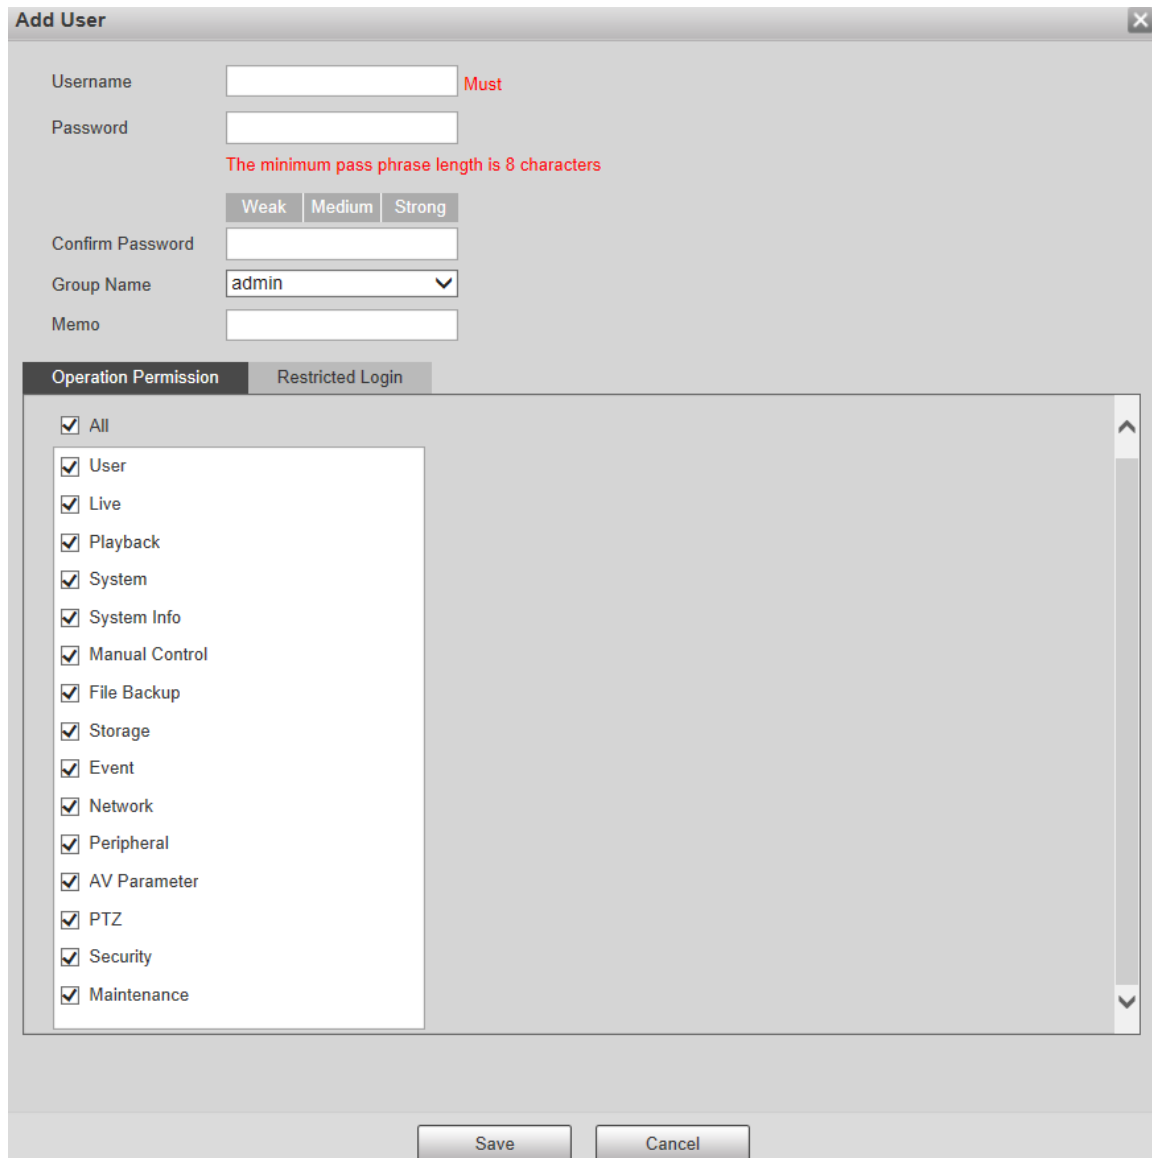Figure 5-152 Add users



Step 2 Enter **Username** and **Password**, confirm password, select **Group Name**, and then add **Memo**.

Step 3 Set **Operation Permission** and **Restricted Login**.

- Operation Permission: Click **Operation Permission**, and then select the operation permission of the user as needed.
- Restricted Login: **Click Restricted Login**, and the interface shown in Figure 5-153 is displayed. You can control login to the Device by setting the **IP Address**, **Validity Period** and **Time Range**.



- Once the group is selected as needed, the user permission can only be a subset of the group, and cannot exceed its permission attributes.
- It is recommended to give less permissions to general users than advanced users.

Figure 5-153 Restricted login

Step 4 Click **Save**.

Modifying Users

Step 1 Click  corresponding to the user you want to modify.

Figure 5-154 Modify users

Step 2 Modify user information as needed.

Step 3 Click **Save**.


Modifying Password

Step 1 Select the **Modify Password** check box.

Step 2 Enter old password and new password, and confirm password.

Step 3 Click **Save**.

Deleting Users

Click  corresponding to the user to be deleted, and the user can be deleted.




Users/user groups cannot be recovered after deletion. Think twice before performing the operation.

5.7.2.1.2 Group Name

Select **Setting > System > Account > Account > Group Name**, and you can add groups, delete groups, modify group passwords, and perform other operations.

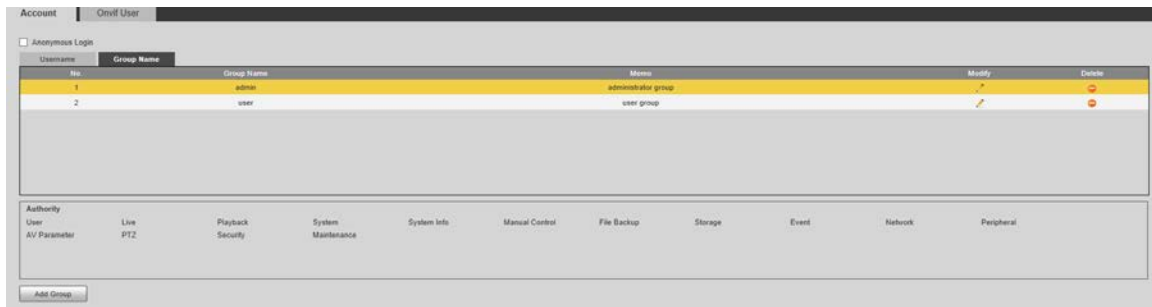Figure 5-155 User group settings



Configuring User Group

The default authorities of Admin group includes live, playback, storage, file backup, user, system, system info, manual control, maintenance, peripheral, PTZ, security, network, event and AV parameters; the default authorities of User group include live and playback.

Table 5-51 Description of user group parameters

| Group Authority | Admin | User | Functions |
|-----------------|-------|------|--|
| User | YES | NA | Add, delete and check user/user group. |
| Live | YES | YES | Real-time stream view. |
| Playback | YES | YES | Playback view. |
| System | YES | NA | System time setting and more. |
| System Info | YES | NA | Version information, system logs and more. |
| Manual Control | YES | NA | PTZ settings. |
| File Backup | YES | NA | File backup. |
| Storage | YES | NA | Storage point configuration, snapshot recording time configuration, SFTP configuration and more. |
| Event | YES | NA | Video detection settings, audio detection settings, alarm settings and more. |
| Network | YES | NA | IP settings, SMTP settings, SNMP settings, AP Hotspot settings and more. |
| Peripheral | YES | NA | External light, wiper and serial port settings. |
| AV Parameter | YES | NA | Camera property settings, audio and video settings and more. |
| PTZ | YES | NA | Preset settings, tour settings and more. |
| Security | YES | NA | HTTPS settings, RTSP over TLS settings and more. |
| Maintenance | YES | NA | Automatic maintenance settings and more. |



- Any user in the **Admin** group has **User** authority to modify group authority. The **User** group does not have this authority.
- The functions of the device correspond to the authority control respectively. Only user with specified authority can use corresponding function; the **Admin** group has all the authorities.

Adding Groups

For specific operations, refer to "5.7.2.1.1 Username".

Modifying Groups

For specific operations, refer to "5.7.2.1.1 Username".

Deleting Groups

For specific operations, refer to "5.7.2.1.1 Username".

5.7.2.2 Onvif User

On the web interface, you can add ONVIF users, or modify existing users.

Procedure

Step 1 Select **Setting > System > Account > Onvif User**.

Figure 5-156 Onvif user





Step 2 Click **Add User**.

Figure 5-157 Add users

Step 3 Set the username and password, confirm password, and then select the group name.

Step 4 Click **Save**.

Related Operations

- Click  to modify user information.
- Click  to delete users.


5.7.3 Safety

5.7.3.1 RTSP Authentication

Set the authentication method for media stream.

Step 1 Select **Setting > System > Safety > RTSP Authentication**.

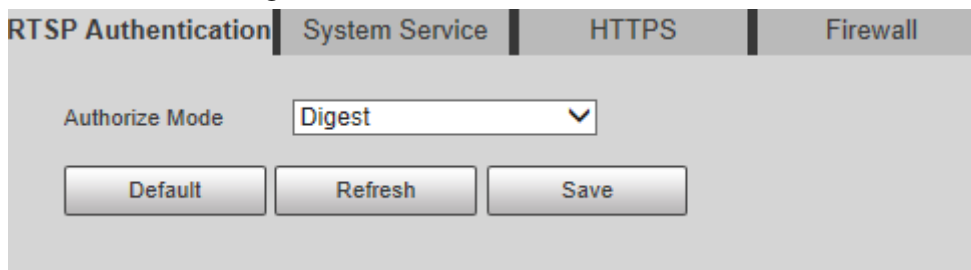Figure 5-158 RTSP authentication



Step 2 Select the **Authorize Mode**.

You can select from **Digest**, **Basic** and **None**. It is **Digest** by default.



- Click **Default**, and **Digest** is selected automatically.
- Select **None**, and "Non-authentication mode may have risk. Are you sure to enable it" prompt will be displayed. Think twice before selecting the mode.
- Select **Basic** mode, and "Basic authentication mode may have risk. Are you sure to enable it?" prompt will be displayed. Think twice before selecting the mode.

5.7.3.2 System Service





You can configure system service to ensure system security.




Step 1 Select **Setting > System > Safety > System Service**.

Figure 5-159 System service

Step 2 Configure system service parameters.

Table 5-52 System service parameter description

| Function | Description |
|----------------------------|--|
| SSH | <p>You can enable SSH authentication to perform safety management. The function is disabled by default.</p>  <p>It is recommended to disable SSH. If this function is enabled, there might be security risks.</p> |
| Multicast/Broadcast Search | <p>Enable this function, and when multiple users are viewing the monitoring screen simultaneously through network, they can find the Device through multicast/broadcast protocol.</p>  <p>It is recommended to disable the multicast/broadcast search function. If this function is enabled, there might be security risks.</p> |
| Password Reset | <p>You can enable Password Reset to perform security management. The function is enabled by default.</p>  <p>If the function is disabled, you can only reset the password after restoring the Device to factory defaults through pressing the Reset button on the device.</p> |
| CGI Service | <p>You can access the Device through this protocol. The function is enabled by default.</p>  <p>It is recommended to disable the function. If this function is enabled, there might be security risks.</p> |

| Function | Description |
|---|--|
| Onvif Service | <p>You can access the Device through this protocol. The function is enabled by default.</p>  <p>It is recommended to disable the function. If this function is enabled, there might be security risks.</p> |
| Audio and Video Transmission Encryption | <p>Enable this function to encrypt the stream transmitted through the private protocol.</p>  <ul style="list-style-type: none"> • Make sure that the matched devices or software support video decryption function. • It is recommended to enable the function. If the function is disabled, there might be risk of data leakage. |
| Mobile Push | <p>Push the alarm snapshot triggered by the Device to the mobile phone. The function is enabled by default.</p>  <p>It is recommended to disable the function. If this function is enabled, there might be security risks.</p> |
| Private Protocol Authentication Mode | <p>You can select Security Mode and Compatible Mode. Security mode is recommended. If you select compatibility mode, there might be security risks.</p> |

Step 3 Click **Save**.

5.7.3.3 HTTPS



It is recommended to enable HTTPS service. If the service is disabled, there might be risk of data leakage.

Create certificate or upload signed certificate, and then you can log in through HTTPS with your PC. HTTPS can ensure data security, and protect user information and device security with reliable and stable technology.

Step 1 Create certificate or upload the signed certificate.

- If you select **Create Certificate**, refer to the following steps.
 - 1) Select **Setting > System > Safety > HTTPS**.

Figure 5-160 HTTPS (1)

RTSP Authentication | System Service | **HTTPS** | Firewall

Enable HTTPS

Protocol Version

Enable TLSv1.0

Create Certificate

Request Created

Request Created

Install Signed Certificate

Certificate Path

Certificate Key Path

Certificate Installed

Certificate Installed

Attribute

- 2) Click **Create**.
The **HTTPS** dialog box is displayed.

Figure 5-161 HTTPS (2)

HTTPS [X]

Region *e.g. CN

IP or Domain name *

Validity Period Day*Range :1-5000

Province

Location

Organization

Organization Unit

Email


- 3) Enter the required information, and then click **Create**.



The entered IP or domain name must be the same as the IP or domain name of the Device.


- 4) Click **Install** to install the certificate on the Device.

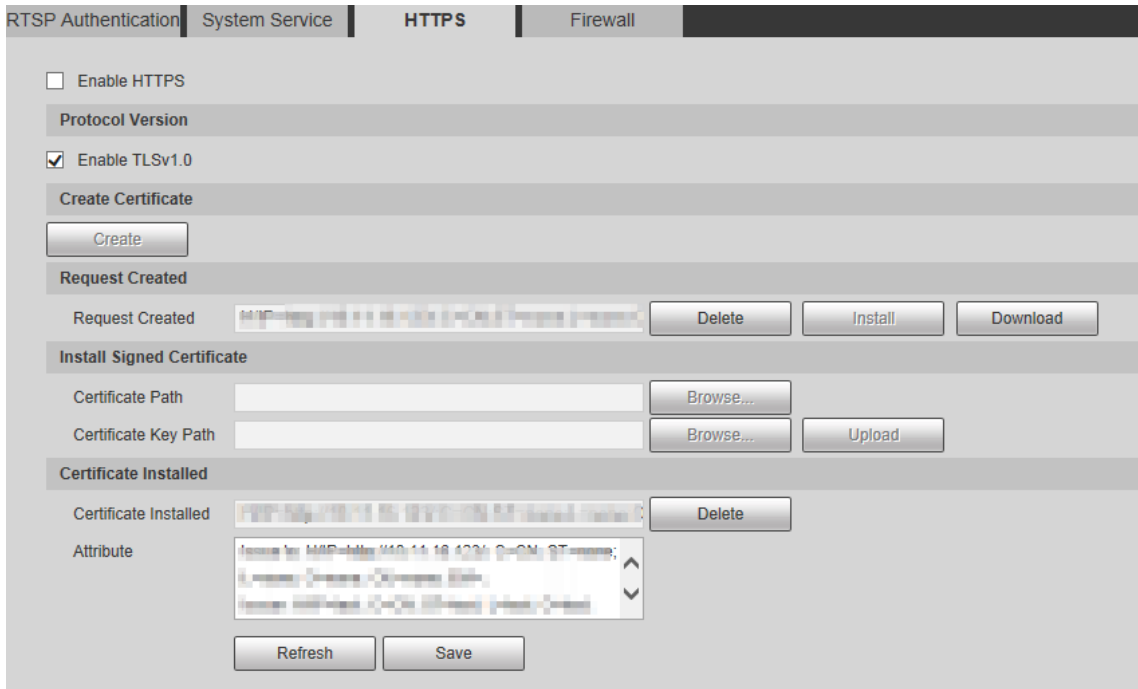Figure 5-162 Certificate installation



- 5) Click **Download** to download root certificate.
The **Save As** dialog box is displayed.

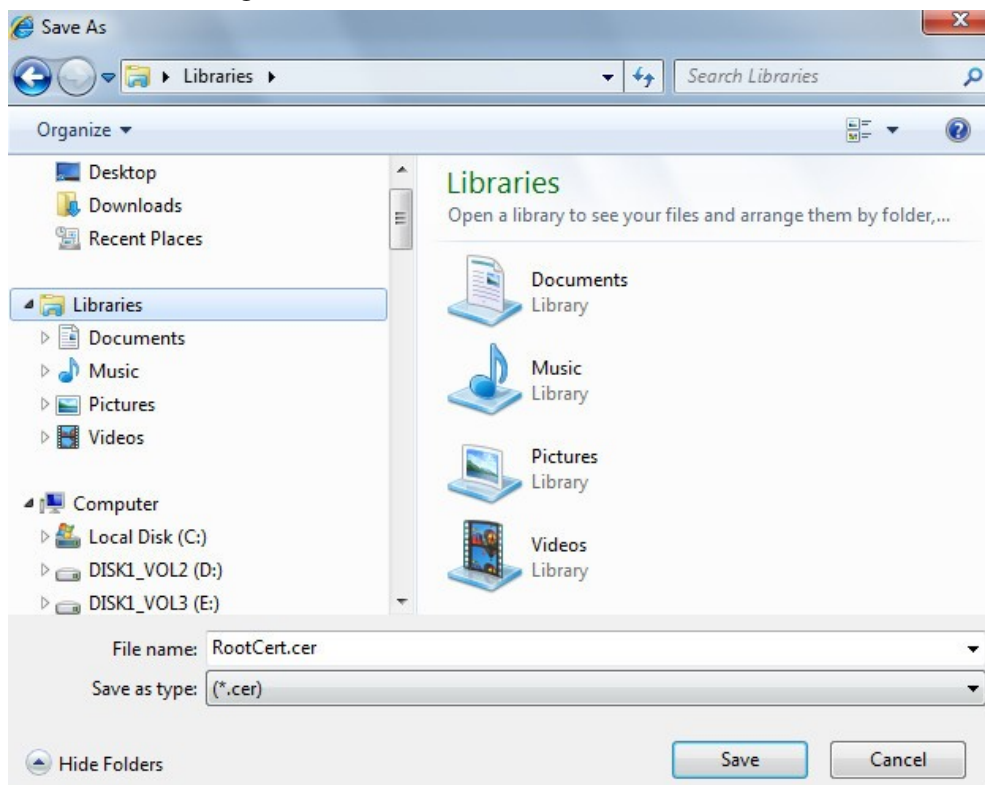
Figure 5-163 Download root certificate



- 6) Select storage path, and then click **Save**.

- 7) Double-click the **RootCert.cer** icon.
The **Certificate** interface is displayed.

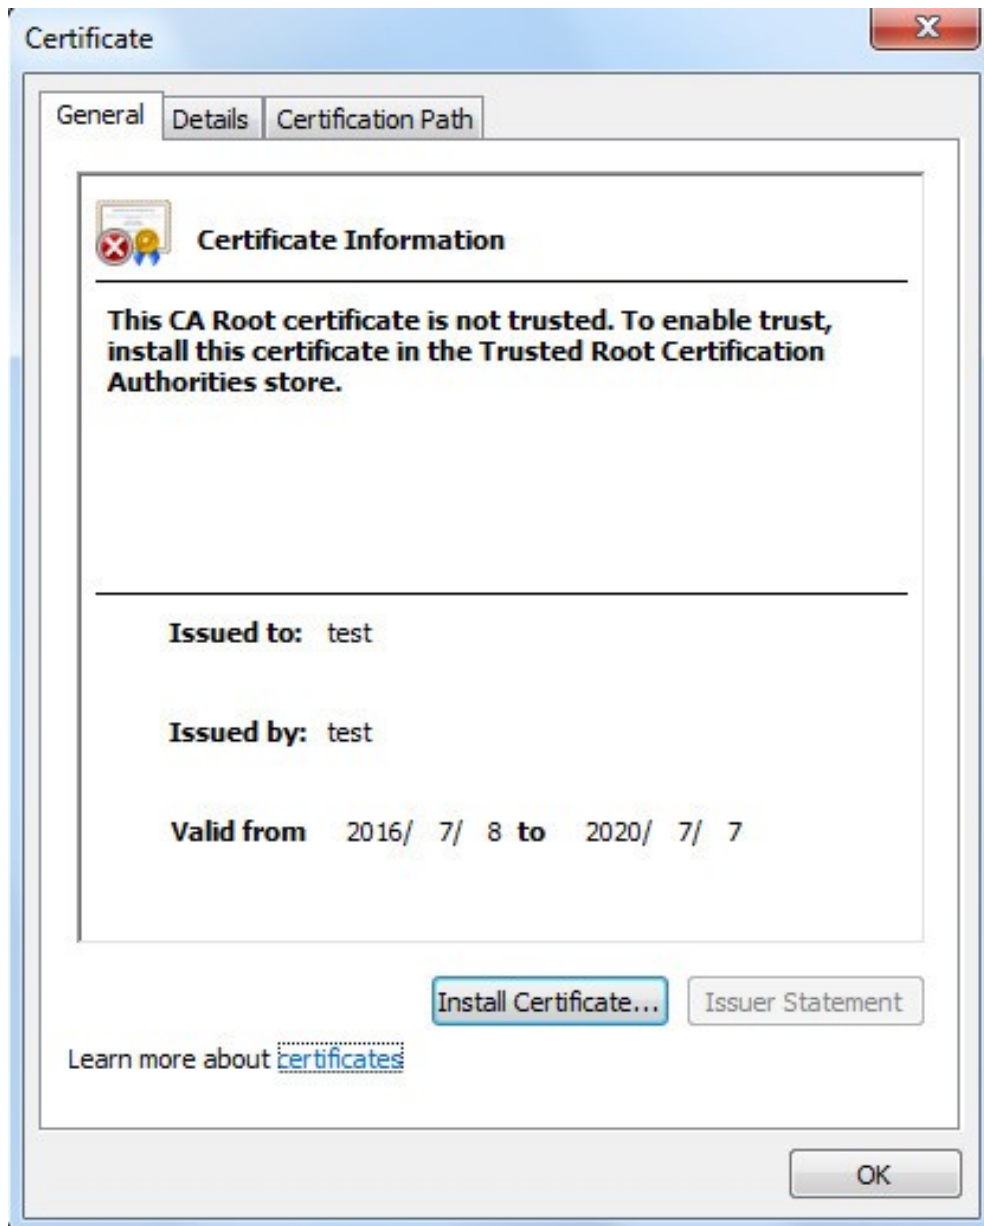Figure 5-164 Certificate information




- 8) Click **Install Certificate**.
The **Certificate Import Wizard** interface is displayed.

Figure 5-165 Certificate import wizard



- 9) Click **Next**, and then select **Trusted Root Certification Authorities**.

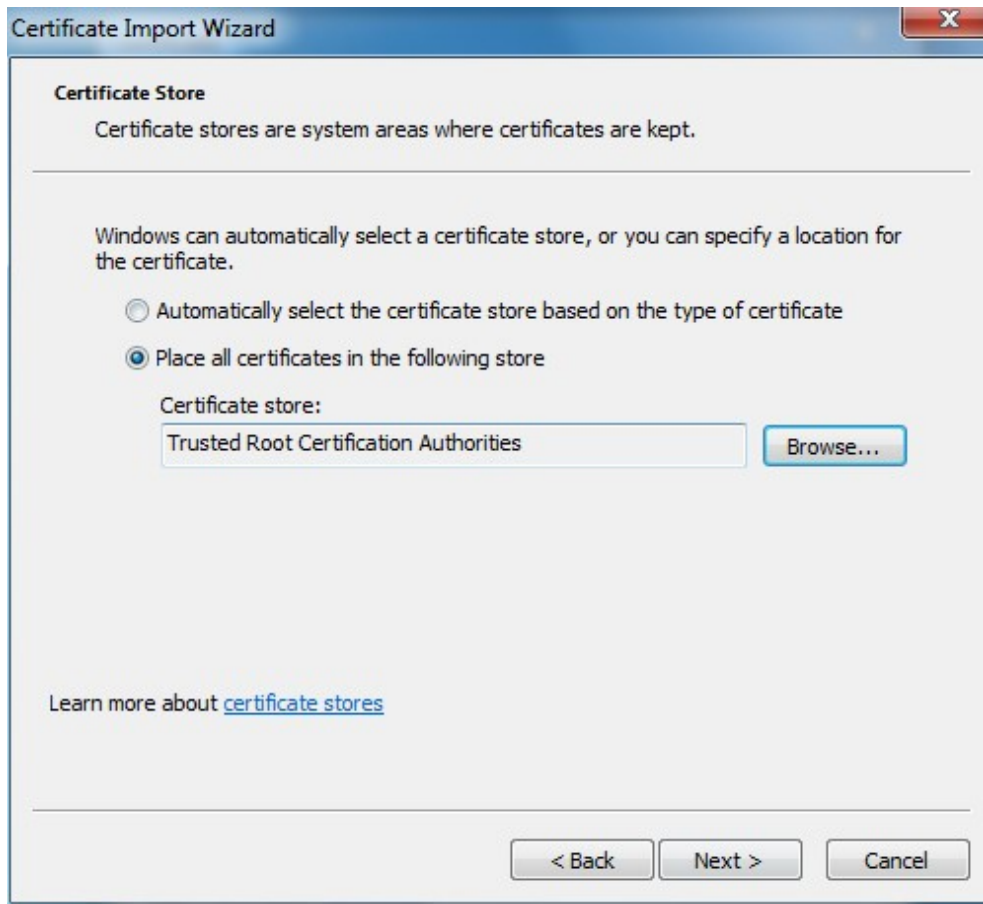
Figure 5-166 Certificate storage area



10) Click **Next**.

The **Completing the Certificate Import Wizard** interface is displayed.

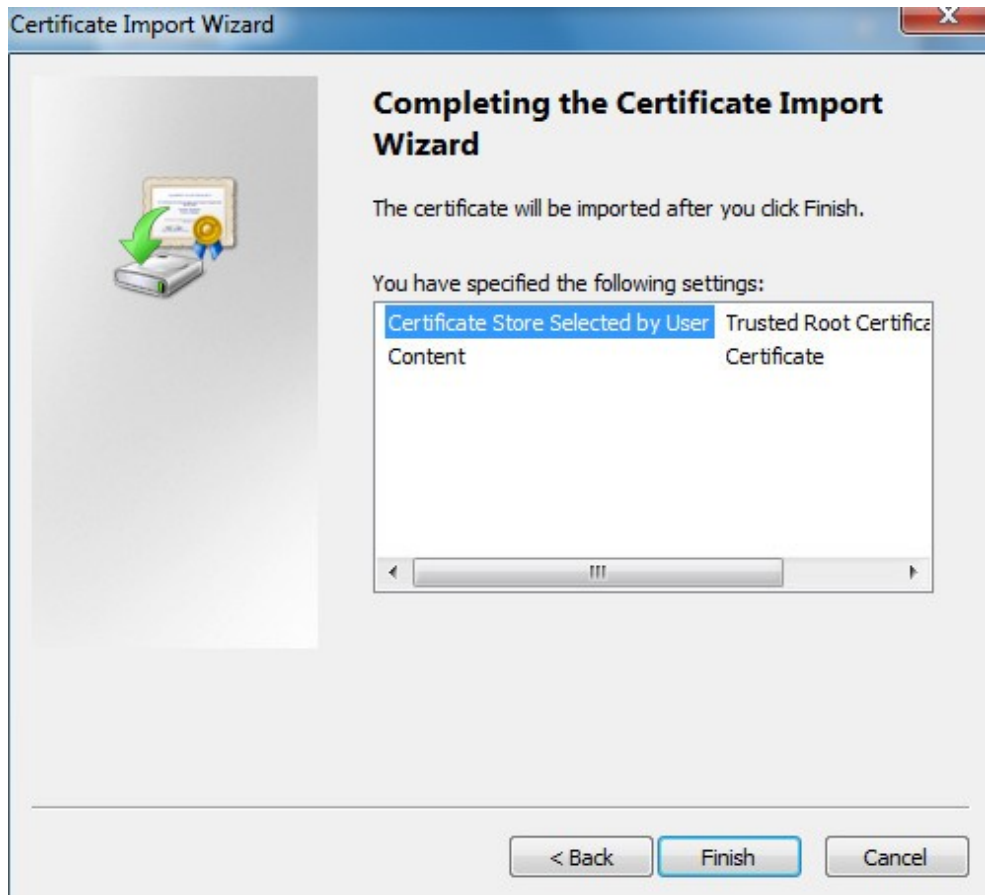
Figure 5-167 Completing the certificate import wizard



11) Click **Finish**.

The **Security Warning** dialog box is displayed.

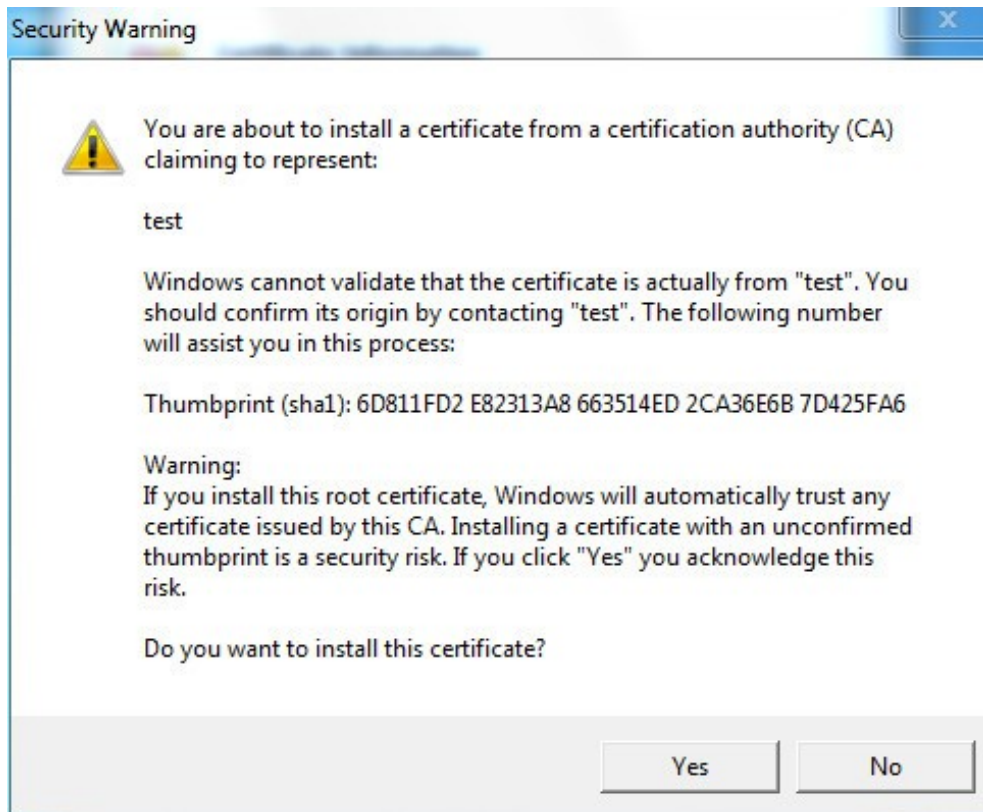
Figure 5-168 Security warning



12) Click **Yes**.

The import was successful dialog box is displayed. Click **OK** to complete the certificate installation.

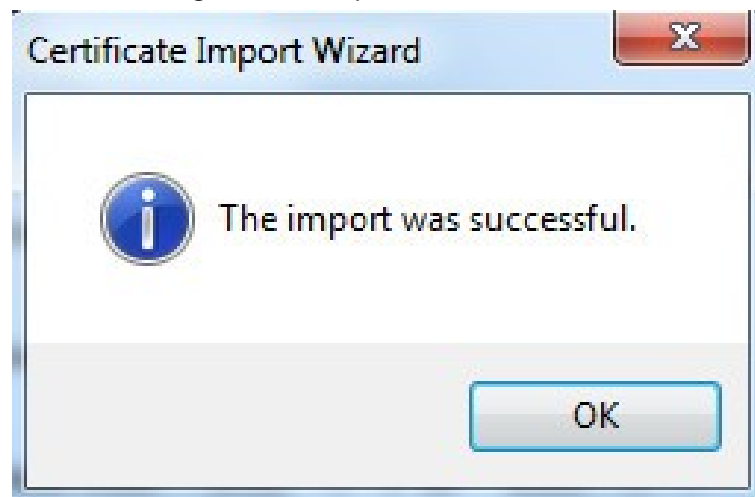Figure 5-169 Import success



- If you select **Install Signed Certificate**, refer to the following steps.

1) Select **Setting > System > Safety > HTTPS**.

The **HTTPS** interface is displayed.

Figure 5-170 Install signed certificate

2) Click **Browse** to upload the signed certificate and certificate key, and then click **Upload**.

3) Install the root certificate. For details, see 5) to 12) in [Step 1](#).

[Step 2](#) Select **Enable HTTPS**, and then click **Save**.

The **Reboot** interface is displayed, and the configuration takes effect after reboot.

Figure 5-171 Reboot

Enter `https://xx.xx.xx.xx` in the browser to open the login interface. If no certificate is installed, a certificate error prompt will be displayed.



- If HTTPS is enabled, you cannot access the Device through HTTP. The system will switch to HTTPS if you access the Device through HTTP.
- The deletion of created and installed certificates cannot be restored. Think twice before deleting them.

5.7.3.4 Firewall

Set a firewall for the Device to prevent network attacks after the Device is connected to the network.

[Step 1](#) Select **Setting > System > Safety > Firewall**.

Figure 5-172 Firewall

Step 2 Select the type of network attack that the firewall resists as needed. You can select **Network Access**, **PING Prohibited**, or **Prevent Semijoin**.

Step 3 Select **Enable**, and then the **Firewall** is enabled.

Step 4 Click **Save**.

5.7.4 Peripheral



The peripheral functions might vary with different models, and the actual interface shall prevail.

5.7.4.1 Wiper

Step 1 Select **Setting > System > Peripheral > Wiper**.

Figure 5-173 Wiper settings

Step 2 Configure parameters as needed.

Table 5-53 Wiper setting parameter description

| Parameter | Description |
|------------------|---|
| Mode | Set the wiper mode. It is Manual by default. In Manual mode, you need to manually start the wiper. |
| Interval Time | The time between wiper starting to wiper ending. |
| Working Duration | Set the maximum duration of the wiper operating once in Manual mode. The value ranges from 10 minutes to 1440 minutes. |

Step 3 Click **Save**.


5.7.5 Default



All information except IP address and user management will be restored to defaults. Think twice before performing the operation.

Select **Setting > System > Default**, and click **Default** to restore the Device. The configuration interface is displayed.

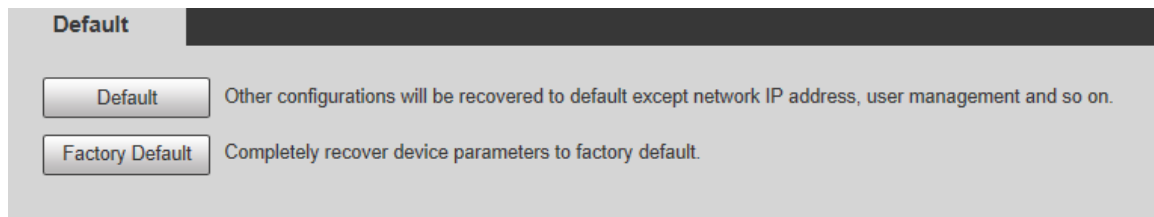Figure 5-174 Default interface



Select the recovery mode as needed.

- **Default:** All information except IP address and user management will be restored to defaults.
- **Factory Default:** The function is equivalent to the Reset button of the Device. All configuration information of the Device can be restored to the factory defaults, and the IP address can also be restored to the original IP address. After clicking **Factory Default**, you need to enter the password of admin user on the interface displayed. The Device can be restored to factory defaults only after the system confirms that the password is correct.




- Only admin user can use this function.
- When the Device is restored to factory defaults, all information except the data in the external storage media will be erased. Delete data in external storage media by formatting and other methods.

5.7.6 Import/Export

When multiple devices share the same configuration methods, they can be quickly configured by importing and exporting configuration files.

Step 1 On the web interface of one device, select **Setting > System > Import/Export**. The **Import/Export** interface is displayed. See Figure 5-175.

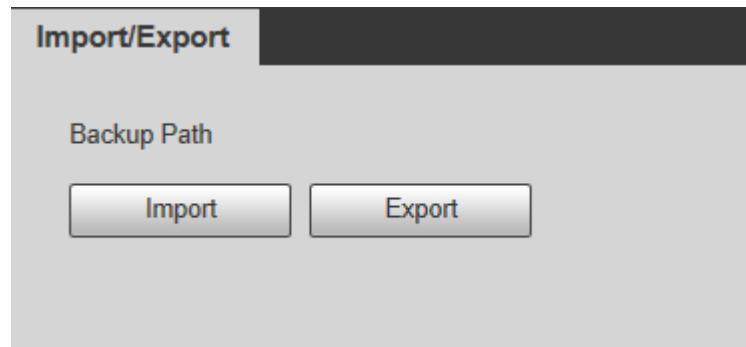Figure 5-175 Import/Export



Step 2 Click **Export** to export the configuration file (.backup file) to the local storage path.

Step 3 Click **Import** on the **Import/Export** interface of the Device to be configured to import the configuration file, and the Device will complete the configurations.

5.7.7 System Maintenance


5.7.7.1 Auto Maintain

You can select **Auto Reboot** or **Auto Delete Old Files**.

- If you select **Auto Reboot**, the frequency and time need to be set.
- If you select **Auto Delete Old Files**, you need to set the time period for the files to be deleted.


Step 1 Select **Setting > System > Auto Maintain**.

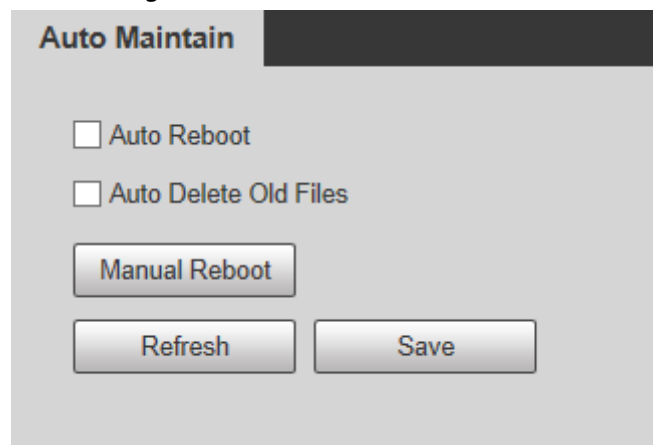Figure 5-176 Auto maintain



Step 2 Configure parameters as needed.

Table 5-54 Auto maintain parameter description

| Parameter | Description |
|-----------------------|--|
| Auto Reboot | Select the check box to set the Device reboot time. |
| Auto Delete Old Files | Select the check box to customize the time period for the files to be deleted. The value ranges from 1 day to 31 days.  When you enable the function, The deleted files cannot be recovered. Are you sure to enable this function now? prompt will be displayed. Think twice before enabling the function. |

Step 3 Click **Save** and the configuration will take effect.

5.7.7.2 Emergency Maintenance

By enabling emergency maintenance, you can fix most issues caused by upgrade and configuration.

Step 1 Select **Setting > System > Auto Maintain > Emergency Maintenance**.

Figure 5-177 Auto maintain



Step 2 Click **Save**.

5.7.8 Upgrade


Upgrade the system to improve device function and stability.



If wrong upgrade file has been used, restart the Device; otherwise some functions might not work properly.

Select **Setting > System > Upgrade**. The configuration interface is displayed.

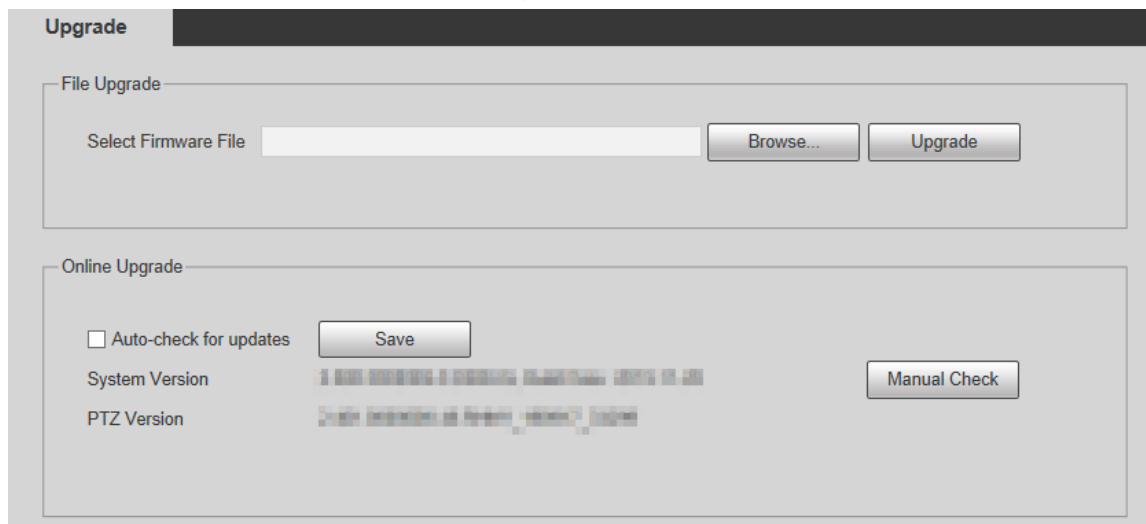Figure 5-178 System upgrade



- File Upgrade: Click **Browse**, select the upgrade file, and then click **Upgrade** to upgrade the firmware. The upgrade file is in the format of *.bin.
- Online Upgrade
 1. Select the **Auto-check for updates** check box.
This will enable the system to check for upgrade once a day automatically, and there will be system notice if any upgrade is available.



We need to collect the data such as IP address, device name, firmware version, and device serial number to perform auto-check. The collected information is only used to verify the legitimacy of the Device, and push the upgrade notification.

2. Click **Save**.



Click **Manual Check**, and you can check for upgrade manually.

5.8 Information


You can view information such as version, online users, log, and life statistics.

5.8.1 Version

You can view information such as system hardware features, software version and release date.

Select **Setting > Information > Version > Version**, and then you can see the version information of current web interface.

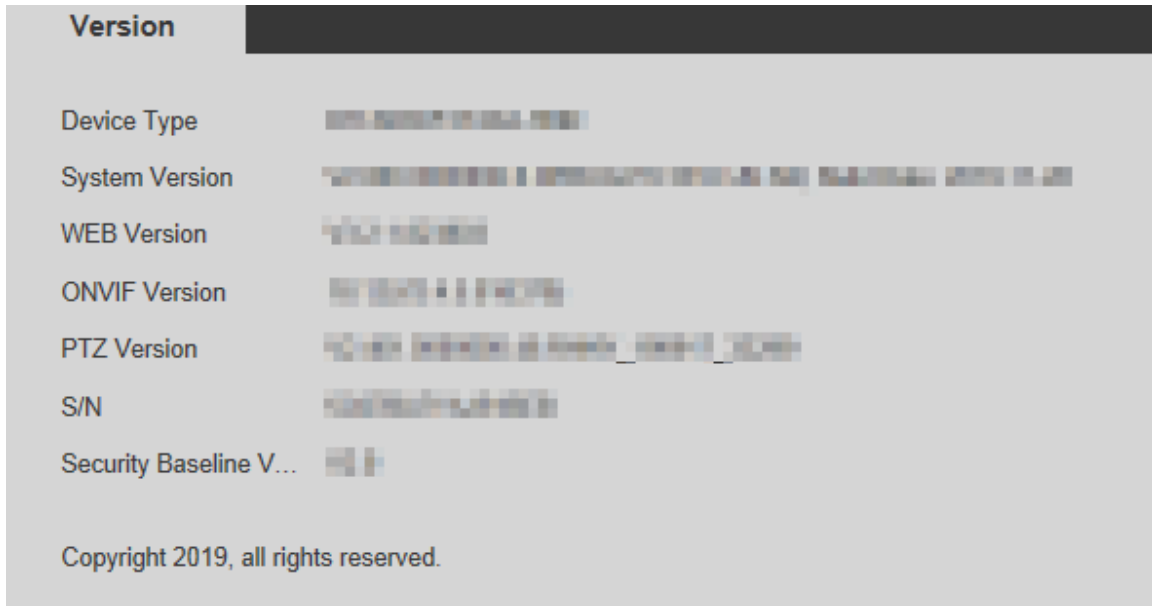Figure 5-179 Version



5.8.2 Log Information

5.8.2.1 Log

Select **Setting** > **Information** > **Log** > **Log**, and then you can see the operation information of the Device, and some system information. See Figure 5-180. For parameter description, see Table 5-55.

Figure 5-180 Log

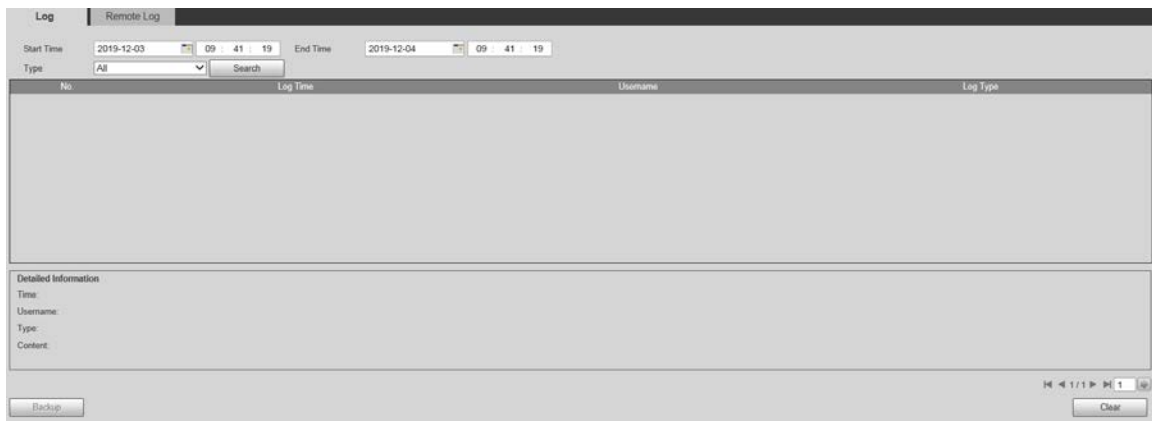



Table 5-55 Log parameter description

| Parameter | Description |
|------------|--|
| Start Time | The start time of the log to be searched (January 1, 2000 is the earliest time). |
| End Time | The end time of the log to be searched (December 31, 2037 is the latest time). |
| Type | The log type includes All, System, Setting, Data, Event, Record, Account, Clear Log, and Safety. |

| Parameter | Description |
|----------------------|--|
| Search | Set the start time and end time of the log to be searched, select the log type, and then click Search . The searched log number and time period will be displayed. |
| Detailed Information | Click a log to display the details. |
| Clear | Clear all logs of the Device, and classified clearing is not supported. |
| Backup | Back up the searched system logs to the PC currently used by the user.  The data will be overwritten if the disk is full. Back up the data in time as needed. |

Here are the meanings of different log types.

- **System:** Includes program launch, force exit, exit, program reboot, device shutdown/restart, system reboot, and system upgrade.
- **Setting:** Includes saving configurations, and deleting configuration files.
- **Data:** Includes disk type configurations, data erasing, hot swap, FTP state, and recording mode.
- **Event** (records events such as video detection, smart plan, alarm, and abnormality): Includes starting events, and ending events.
- **Record:** Includes file access, file access error, and file search.
- **Account** (records modification of user management, login, and logout): Includes login, logout, adding user, deleting user, modifying user, adding group, deleting group, and modifying group.
- **Safety:** Includes security-related information.
- **Clear Log:** Clearing logs.

5.8.2.2 Remote Log

Upload the Device operations to the log server.

Step 1 Select **Setting > Information > Log > Remote Log**.

Figure 5-181 Remote log

Step 2 Select **Enable**, and then remote log function is enabled.

Step 3 Set the **IP Address**, **Port** and **Device Number** of the log server.



Click **Default** to restore the Device to the default settings.

5.8.3 Online User

Select **Setting** > **Information** > **Online User**, and the **Online User** interface is displayed.

Figure 5-182 Online users

| No. | Username | User Local Group | IP Address | User Login Time |
|-----|----------|------------------|---------------|---------------------|
| 1 | admin | admin | 192.168.1.100 | 2021-02-23 11:53:22 |

Refresh

5.8.4 Life Statistics

Select **Setting** > **Information** > **Life Statistics** to view the life statistics of the Device.



The function is available on select models.

Figure 5-183 Online users

| Life Statistics | |
|--------------------|---------------------------------|
| Total Working Time | 62 day(s) 1 hour(s) 0 minute(s) |
| Upgrade Times | 20 time |
| Last Upgrade Date | 2021-02-23 11:53:22 |

5.8.5 Battery Status

Select **Setting** > **Information** > **Battery Status** to view battery usage of the Device.



The function is available on select models.

Figure 5-184 Online users

Battery Status

| | |
|-----------------|---------|
| Capacity Limit | 100 % |
| Voltage | 8.303 V |
| Charging or Not | No |

Refresh

6 Alarm



You can select alarm types on the interface. When the selected alarms are triggered, detailed alarm information will be displayed on the right side of the interface. You can also select **Prompt** or **Play Alarm Tone**. When an alarm occurs, the alarm prompt or tone will be triggered. For the **Alarm** setting interface, see Figure 6-1. For parameter description, see Table 6-1.

Figure 6-1 Alarm setting interface



Table 6-1 Alarm setting parameter description

| Category | Parameter | Description |
|------------|--------------------|---|
| Alarm Type | Motion Detection | Record alarm information in case of motion detection. |
| | Disk Full | Record alarm information in case of full disk. |
| | Disk Error | Record alarm information in case of disk error. |
| | Video Tamper | Record alarm information in case of video tampering. |
| | External Alarm | Record alarm information in case of an external alarm. |
| | Illegal Access | Record alarm information in case of illegal access. |
| | Audio Detection | Record alarm information in case of audio detection. |
| | IVS | Record alarm information in case of smart events. |
| | Scene Changing | Record alarm information in case of scene changing. |
| | Security Exception | Record alarm information in case of security exception. |

| Category | Parameter | Description |
|------------|-----------------|---|
| Operation | Prompt | <p>Select the Prompt check box. When you are not on the Alarm interface, and the selected alarm event is triggered, the Relay-out button on the main menu will change to , and the alarm information will be automatically recorded. After you click the Alarm menu bar, the button disappears.</p> <p></p> <p>If you are on the Alarm interface, there will be no image prompt when the selected alarm event is triggered, but the corresponding alarm information will be recorded in the alarm list on the right.</p> |
| | Play Alarm Tone | Select the check box, and then select the tone file path. When the selected alarm event is triggered, the selected tone file will be played to prompt you that an alarm event is triggered. |
| Alarm Tone | Tone Path | Customize the storage path for alarm tones. |

7 Logout

Click **Logout** to log out, and the login interface is displayed. See Figure 7-1. Enter the username and password to log in again.

Figure 7-1 Login interface



Appendix 1 Cybersecurity Recommendations

Cybersecurity is more than just a buzzword: it's something that pertains to every device that is connected to the internet. IP video surveillance is not immune to cyber risks, but taking basic steps toward protecting and strengthening networks and networked appliances will make them less susceptible to attacks. Below are some tips and recommendations on how to create a more secured security system.

Mandatory actions to be taken for basic equipment network security:

1. Use Strong Passwords

Please refer to the following suggestions to set passwords:

- The length should not be less than 8 characters;
- Include at least two types of characters; character types include upper and lower case letters, numbers and symbols;
- Do not contain the account name or the account name in reverse order;
- Do not use continuous characters, such as 123, abc, etc.;
- Do not use overlapped characters, such as 111, aaa, etc.;

2. Update Firmware and Client Software in Time

- According to the standard procedure in Tech-industry, we recommend to keep your equipment (such as NVR, DVR, IP camera, etc.) firmware up-to-date to ensure the system is equipped with the latest security patches and fixes. When the equipment is connected to the public network, it is recommended to enable the "auto-check for updates" function to obtain timely information of firmware updates released by the manufacturer.
- We suggest that you download and use the latest version of client software.

"Nice to have" recommendations to improve your equipment network security:

1. Physical Protection

We suggest that you perform physical protection to equipment, especially storage devices. For example, place the equipment in a special computer room and cabinet, and implement well-done access control permission and key management to prevent unauthorized personnel from carrying out physical contacts such as damaging hardware, unauthorized connection of removable equipment (such as USB flash disk, serial port), etc.

2. Change Passwords Regularly

We suggest that you change passwords regularly to reduce the risk of being guessed or cracked.

3. Set and Update Passwords Reset Information Timely

The equipment supports password reset function. Please set up related information for password reset in time, including the end user's mailbox and password protection questions. If the information changes, please modify it in time. When setting password protection questions, it is suggested not to use those that can be easily guessed.

4. Enable Account Lock

The account lock feature is enabled by default, and we recommend you to keep it on to guarantee the account security. If an attacker attempts to log in with the wrong password several times, the corresponding account and the source IP address will be locked.

5. **Change Default HTTP and Other Service Ports**

We suggest you to change default HTTP and other service ports into any set of numbers between 1024~65535, reducing the risk of outsiders being able to guess which ports you are using.

6. **Enable HTTPS**

We suggest you to enable HTTPS, so that you visit Web service through a secure communication channel.

7. **MAC Address Binding**

We recommend you to bind the IP and MAC address of the gateway to the equipment, thus reducing the risk of ARP spoofing.

8. **Assign Accounts and Privileges Reasonably**

According to business and management requirements, reasonably add users and assign a minimum set of permissions to them.

9. **Disable Unnecessary Services and Choose Secure Modes**

If not needed, it is recommended to turn off some services such as SNMP, SMTP, UPnP, etc., to reduce risks.

If necessary, it is highly recommended that you use safe modes, including but not limited to the following services:

- SNMP: Choose SNMP v3, and set up strong encryption passwords and authentication passwords.
- SMTP: Choose TLS to access mailbox server.
- FTP: Choose SFTP, and set up strong passwords.
- AP hotspot: Choose WPA2-PSK encryption mode, and set up strong passwords.

10. **Audio and Video Encrypted Transmission**

If your audio and video data contents are very important or sensitive, we recommend that you use encrypted transmission function, to reduce the risk of audio and video data being stolen during transmission.

Reminder: encrypted transmission will cause some loss in transmission efficiency.

11. **Secure Auditing**

- Check online users: we suggest that you check online users regularly to see if the device is logged in without authorization.
- Check equipment log: By viewing the logs, you can know the IP addresses that were used to log in to your devices and their key operations.

12. **Network Log**

Due to the limited storage capacity of the equipment, the stored log is limited. If you need to save the log for a long time, it is recommended that you enable the network log function to ensure that the critical logs are synchronized to the network log server for tracing.

13. **Construct a Safe Network Environment**

In order to better ensure the safety of equipment and reduce potential cyber risks, we recommend:

- Disable the port mapping function of the router to avoid direct access to the intranet devices from external network.
- The network should be partitioned and isolated according to the actual network needs. If there are no communication requirements between two sub networks, it is suggested to use VLAN, network GAP and other technologies to partition the network, so as to achieve the network isolation effect.

- Establish the 802.1x access authentication system to reduce the risk of unauthorized access to private networks.
- Enable IP/MAC address filtering function to limit the range of hosts allowed to access the device.

ENABLING A SAFER SOCIETY AND SMARTER LIVING

ZHEJIANG DAHUA VISION TECHNOLOGY CO., LTD.

Address: No.1199 Bin'an Road, Binjiang District, Hangzhou, P. R. China | Website: www.dahuasecurity.com | Postcode: 310053

Email: overseas@dahuatech.com | Fax: +86-571-87688815 | Tel: +86-571-87688883